



Model Number

NMB8-30GM85-US-C-FE-V93

Features

- Stainless steel sensing face
- Sensing range 8 mm
- 2-wire AC/DC
- Weld field immune
- Weld slag resistant coating
- Ferrous targets

Accessories

V93-G-YE2M-STOOW

Female cordset, 7/8" - 16 UNF, 3-pin, PUR cable

AB-30-L3M-C

Mounting aid

Technical Data

General specifications

Switching element function		AC/DC	NO
Rated operating distance	s_n	8 mm	
Installation		flush	
Output polarity		AC/DC	
Assured operating distance	s_a	0 ... 6.48 mm	
Actuating element		Ferrous targets	
Reduction factor r_{Al}		0	
Reduction factor r_{Cu}		0	
Reduction factor r_{304}		0.4 - 0.7	
Reduction factor r_{S37}		1	
Reduction factor r_{Brass}		0	

Nominal ratings

Operating voltage DC	U_B	20 ... 300 V
Operating voltage AC	U_B	20 ... 250 V
Switching frequency	f	0 ... 10 Hz
Hysteresis	H	3 ... 15 typ. 5 %
Reverse polarity protection		reverse polarity tolerant
Short-circuit protection		pulsing
Voltage drop	U_d	≤ 7 V
Operating current	I_L	8 ... 200 mA
Off-state current	I_r	≤ 1.3 mA
Operating voltage indicator		LED, green
Switching state indicator		LED, yellow
Error indicator		LED, green/yellow (Alternate Flashing) - Short circuit/overload indication

Mag. Field strength, AC fields	250 mT
Mag. Field strength, DC fields	250 mT

Ambient conditions

Ambient temperature	-25 ... 70 °C (-13 ... 158 °F)
---------------------	--------------------------------

Mechanical specifications

Connection type	Connector 7/8"-16 UN, 3-pin
Housing material	Xylan coated - Stainless steel 1.4305 / AISI 303
Sensing face	Xylan coated - Stainless steel 1.4305 / AISI 303
Degree of protection	IP67


Compliance with standards and directives

Standard conformity	
Standards	EN 60947-5-2:2007 IEC 60947-5-2:2007


Approvals and certificates

UL approval	cULus Listed, General Purpose
CSA approval	cCSAus Listed, General Purpose
CCC approval	Certified by China Compulsory Certification (CCC)


Dimensions

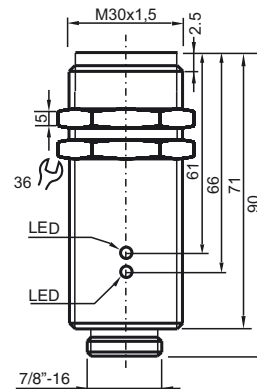

Electrical Connection

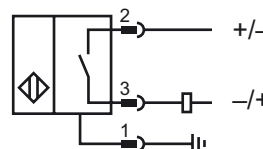

Pinout



Wire colors

1	GN	(green)
2	BK	(black)
3	WH	(white)