## **SIEMENS**

## Data sheet

## US2:LCE01C003600A

Electrically held lighting contactor, (convertible to mech. held), Amp rating 30A (tungsten 20A), 0 N.C. / 3 N.O. poles, 575-600V 60Hz/550V 50Hz coil, Non-combination type, Enclosure NEMA type 1, Indoor general purpose use





Figure similar

Product brand name	Class LC
Design of the product	Electrically held lighting contactor (convertible to mechanically held)
Special product feature	Electrically held convertible to mechanically held; Power poles convertible between NO and NC

General technical data	
Weight [lb]	11 lb
Height x Width x Depth [in]	14 × 8 × 7 in
Protection against electrical shock	NA for enclosed products
Installation altitude [ft] at height above sea level maximum	6560 ft
Ambient temperature [°F]	
<ul><li>during storage</li></ul>	-22 +149 °F
<ul><li>during operation</li></ul>	-13 +104 °F
Ambient temperature	
during storage	-30 +65 °C
<ul><li>during operation</li></ul>	-25 +40 °C
Country of origin	USA

Size of contactor 30 Ar  Number of NO contacts for main contacts 3	nn
Number of NO contacts for main contacts 3	
Number of NC contacts for main contacts 0	
Operating voltage for main current circuit at AC at 60 Hz maximum	,
Mechanical service life (switching cycles) of the main contacts typical	00
Contact rating of the main contacts of lighting contactor	
• at tungsten (1 pole per 1 phase) rated value 20A (	@277V 1p 1ph
• at tungsten (2 poles per 1 phase) rated value 20A (	@480V 2p 1ph
• at tungsten (3 poles per 3 phases) rated value 20A (	@480V 3p 3ph
• at ballast (1 pole per 1 phase) rated value 30A (	@347V 1p 1ph
• at ballast (2 poles per 1 phase) rated value 30A (	@600V 2p 1ph
• at ballast (3 poles per 3 phases) rated value 30A (	ᡚ600V 3p 3ph
• at resistive load (1 pole per 1 phase) rated value	ᡚ600V 1p 1ph
• at resistive load (2 poles per 1 phase) rated value	@600V 2p 1ph
• at resistive load (3 poles per 3 phases) rated value	@600V 3p 3ph
Auxiliary contact	
Number of NC contacts for auxiliary contacts 0	
Number of NO contacts for auxiliary contacts 0	
Number of total auxiliary contacts maximum 4	
Contact rating of auxiliary contacts of contactor NA according to UL	
Coil	
Type of voltage of the control supply voltage AC	
Control supply voltage	
• at AC at 50 Hz rated value 550 V	
• at AC at 60 Hz rated value 575	. 600 V
Apparent pick-up power of magnet coil at AC 248 V	<sup>r.</sup> A
Apparent holding power of magnet coil at AC 28 V·	A
Operating range factor control supply voltage rated value of magnet coil 0.85 .	1.1
Enclosure	
Degree of protection NEMA rating of the enclosure NEMA	A Type 1
Design of the housing Indoo	r general purpose use
Mounting/wiring	
Mounting position Vertice	al

Mounting type	Surface mounting and installation
Type of electrical connection for supply voltage line- side	Screw-type terminals
Tightening torque [lbf·in] for supply	35 35 lbf·in
Type of connectable conductor cross-sections at line- side at AWG conductors single or multi-stranded	2x (14 8 AWG)
Temperature of the conductor for supply maximum permissible	75 °C
Material of the conductor for supply	CU
Type of electrical connection for load-side outgoing feeder	Screw-type terminals
Tightening torque [lbf·in] for load-side outgoing feeder	35 35 lbf·in
Type of connectable conductor cross-sections at AWG conductors for load-side outgoing feeder single or multi-stranded	2x (14 8 AWG)
Temperature of the conductor for load-side outgoing feeder maximum permissible	75 °C
Material of the conductor for load-side outgoing feeder	CU
Type of electrical connection of magnet coil	Screw-type terminals
Tightening torque [lbf·in] at magnet coil	15 15 lbf·in
Type of connectable conductor cross-sections of magnet coil at AWG conductors single or multi-stranded	2x (18 14 AWG)
Temperature of the conductor at magnet coil maximum permissible	75 °C
Material of the conductor at magnet coil	CU

Short-circuit current rating	
Design of the fuse link for short-circuit protection of the main circuit required	100kA@600V (Class R or J 40A max)
Design of the short-circuit trip	Thermal magnetic circuit breaker
Maximum short-circuit current breaking capacity (Icu)	
● at 240 V	24 kA
● at 480 V	65 kA
● at 600 V	25 kA
Certificate of suitability	NEMA ICS 2; UL 508

Industrial Controls - Product Overview (Catalogs, Brochures,...)

www.usa.siemens.com/iccatalog


Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/us/Catalog/product?mlfb=US2:LCE01C003600A


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/US/en/ps/US2:LCE01C003600A

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) <a href="http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=US2:LCE01C003600A&lang=en">http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=US2:LCE01C003600A&lang=en</a>

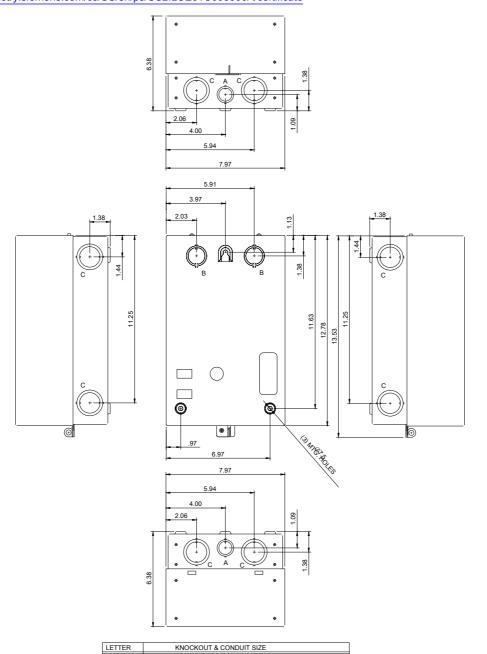

%C22.2 X %C28.6 FOR 12.7 & 19 CONDUIT %C28.6 X %C34.9 FOR 19 & 25.4 CONDUIT %C34.9 X %C43.6 FOR 25 4 & 31.8 CONDUIT

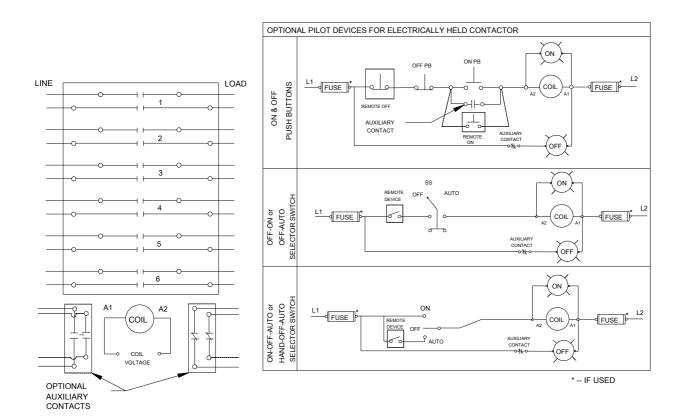

D38297001

last modified: 04/13/2020