


Wire Mesh Tray


model no.	height H	width B	thick-ness t	Weight per 100 m kg	Pack/Box Qty
	mm Inch	mm Inch	mm		
GRS 110.100	110 4,3	100 3,9	4,5	137,04	2 x 3 m
GRS 110.150	110 4,3	150 5,9	4,5	156,00	2 x 3 m
GRS 110.200	110 4,3	200 7,9	4,8	198,78	2 x 3 m
GRS 110.300	110 4,3	300 11,8	4,8	241,93	2 x 3 m
GRS 110.400	110 4,3	400 15,7	4,8	285,07	2 x 3 m
GRS 110.450	110 4,3	450 17,7	4,8	306,64	2 x 3 m
GRS 110.500	110 4,3	500 19,7	4,8	328,22	2 x 3 m
GRS 110.600	110 4,3	600 23,6	4,8	371,36	2 x 3 m

Height 110 mm
Nominal 4 3/8 inches
Eye icon
61

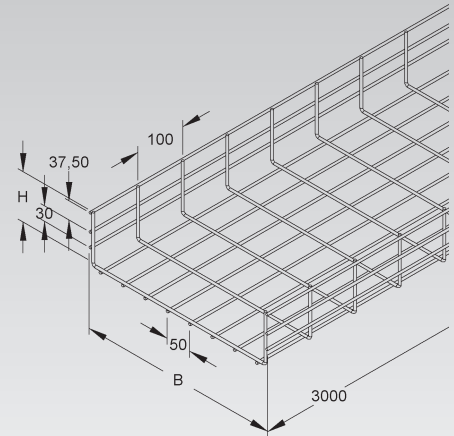

Splice plates have to be ordered separately.

Load Chart: q = uniformly distributed load (tested according to DIN EN IEC 61537 standard)

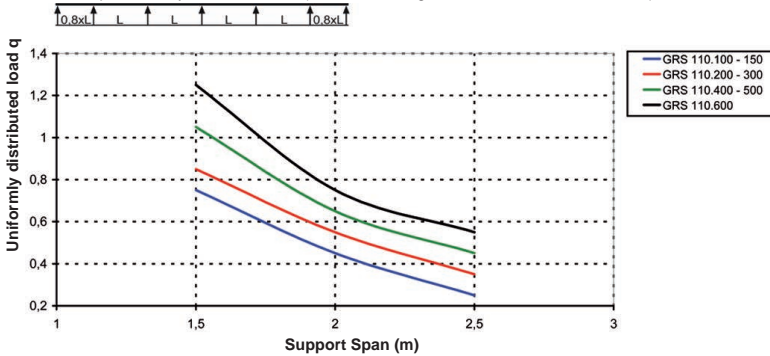


Specified load ratings are independent of splice plate location.

Consult factory for availability of GRS tray in stainless AISI 304 & 316.

Wire Mesh Tray


model no.	height H	width B	thick-ness t	Weight per 100 m kg	Pack/Box Qty
	mm Inch	mm Inch	mm		
GRS 160.200 V	160 6,3	200 7,9	4,8	241,92	2 x 3 m
GRS 160.300 V	160 6,3	300 11,8	4,8	285,07	2 x 3 m
GRS 160.400 V	160 6,3	400 15,7	4,8	350,00	2 x 3 m
GRS 160.450 V	160 6,3	450 17,7	4,8	350,00	2 x 3 m
GRS 160.500 V	160 6,3	500 19,7	4,8	380,00	2 x 3 m
GRS 160.600 V	160 6,3	600 23,6	4,8	413,00	2 x 3 m

Height 160 mm
Nominal 6 inches
Eye icon
61

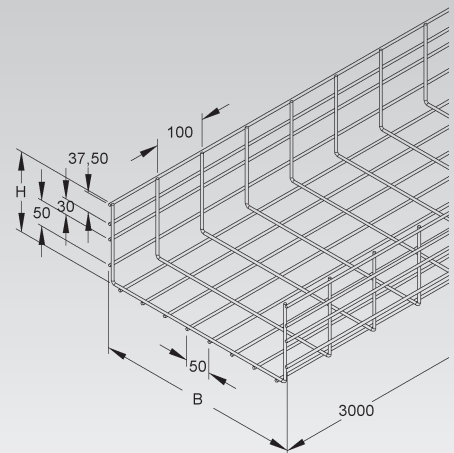

Splice plates have to be ordered separately.

Load Chart: q = uniformly distributed load (tested according to DIN EN IEC 61537 standard)

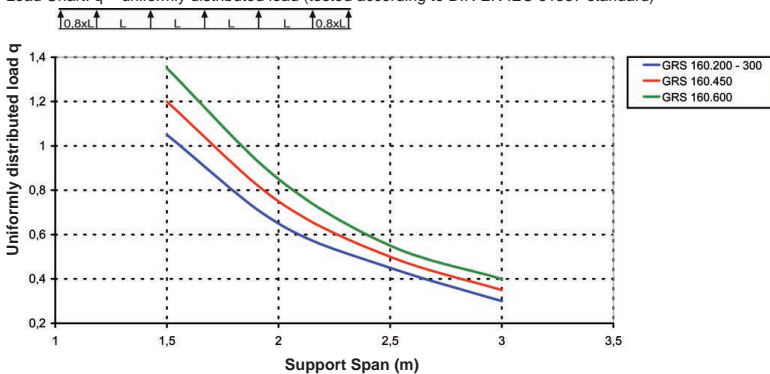

Specified load ratings are independent of splice plate location.

Consult factory for availability of GRS tray in stainless AISI 304 & 316.