


WIRE MESH TRAY SYSTEM

Wire Mesh Tray

model no.	height H	width B	Steel wire- Ø	Weight per 100 m kg	Pack/ Box Qty
	mm Inch	mm Inch	mm		
GRS 60.060	60 2,4	60 2,4	4	54,83	2 x 3 m

Splice plates have to be ordered separately.


Load Chart: q = uniformly distributed load (tested according to DIN EN IEC 61537 standard)

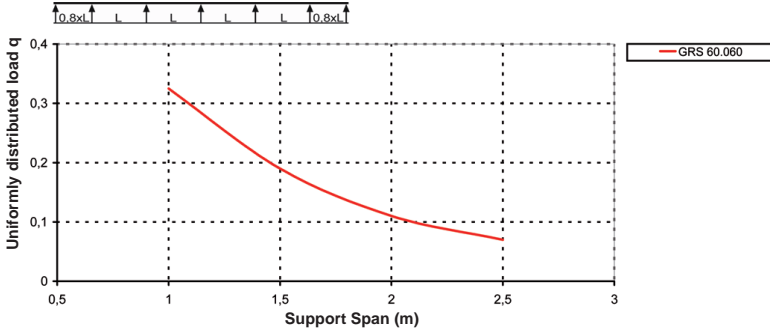

Specified load ratings are independent of splice plate location.

Consult factory for availability of GRS tray in stainless AISI 304 & 316.

Height 60 mm
Nominal 2 3/8 inches

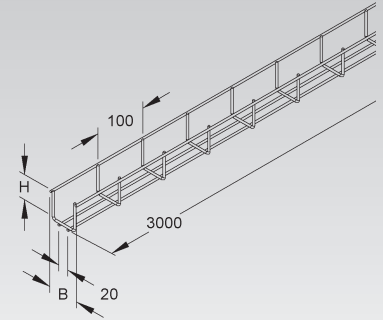


Wire Mesh Tray

model no.	height H	width B	Steel wire- Ø	dist. A	Weight per 100 m kg	Pack/ Box Qty
	mm Inch	mm Inch	mm	mm Inch		
GRS 60.100	60 2,4	100 3,9	4,0	40,0 1,6	78,97	2 x 3 m
GRS 60.150	60 2,4	150 5,9	4,5	37,5 1,5	118,32	2 x 3 m
GRS 60.200	60 2,4	200 7,9	4,5	37,5 1,5	137,27	2 x 3 m
GRS 60.300	60 2,4	300 11,8	4,8	37,5 1,5	199,37	2 x 3 m
GRS 60.400	60 2,4	400 15,7	4,8	37,5 1,5	241,92	2 x 3 m
GRS 60.450	60 2,4	450 17,7	4,8	37,5 1,5	263,49	2 x 3 m
GRS 60.500	60 2,4	500 19,7	4,8	37,5 1,5	285,63	2 x 3 m
GRS 60.600	60 2,4	500 19,7	4,8	37,5 1,5	328,77	2 x 3 m

Splice plates have to be ordered separately.

Load Chart: q = uniformly distributed load (tested according to DIN EN IEC 61537 standard)

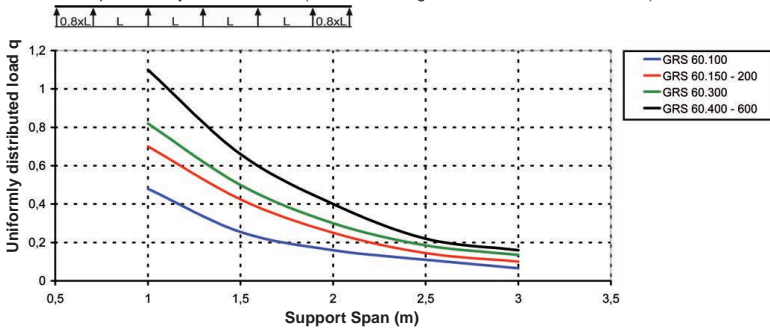

Specified load ratings are independent of splice plate location.

Consult factory for availability of GRS tray in stainless AISI 304 & 316.

Height 60 mm
Nominal 2 3/8 inches



55 54 61

