


EPIC® MC Ethernet Module

RJ45 Connectors + 4 Power Contacts

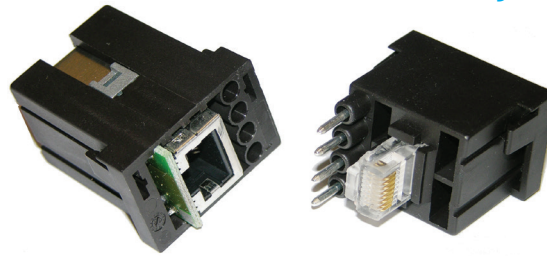

RJ45 connector not included.

Application Advantage

- Occupies two module positions in frame.
- Uses standard HD Series machined crimp contacts for power, see page 288.

Description	Plug	Receptacle
Module	10344300	10345300
RJ45 Connector	CE6326	—

Approvals



Complete the Installation


	RJ45 Connector: CE6326		RJ 45 Crimp Tool: CE5092
--	------------------------------	--	--------------------------------

Technical Data

Number of Contacts:	8
Temperature Range:	-20°C to +85°C
Rated Voltage:	
- Power contacts:	600V
Rated Current:	
- Power contacts:	10A
Termination:	IDC CAT.5 (26-24 AWG)

EPIC® MC Universal Bus Modules

Screw-Terminated

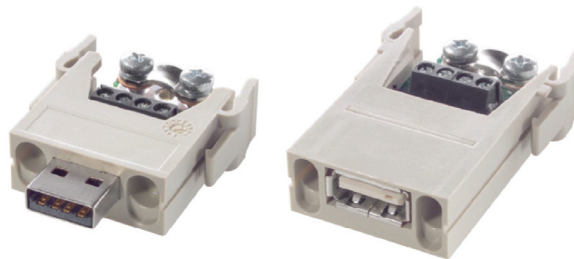

Mount in High Profile housings only.

Approvals



Description	Plug	Receptacle
4 Contacts + Shield	10390600	10390700

Technical Data

Temperature Range:	-20°C to +85°C	Wire Size:	28 - 16 AWG (0.08 - 1.5 mm ²)
Rated Voltage:	30V	Max. Transfer Rate:	1.5 MB/s (bus feed-through)
Rated Current:	1A		

Photographs are not to scale and are not true representations of the products in question. For current information go to our website. If not otherwise specified, all values relating to the product are nominal values.