



SPECIFICATIONS

Light Source	LED
Light Output PPF	1930 μmol/s
Efficacy PPE	2.68 μmol/J
AC Input Power	720W
AC Input Voltage	120V-277V AV, 50/60Hz
Light Distribution	120°
Coverage	4'x8' - 4'x12'
Chips	Full Spectrum + Custom Reds
Thermal Management	Passive
Max Ambient Temperature	95° F / 35° C
Dimming	0 - 10V
Total Harmonic Distortion (THD)	15%
Lifetime	L90 > 50000 Hrs
IP Rating	IP64
Certifications	ETL DLC
Warranty	5 Year Standard Warranty

Product is wattage adjustable. Range can be adjusted from 100W - 720W
NOMINAL ELECTRICAL AC INPUT*

AC Voltage	120V	240V	277V
AC Current	735W	725W	720W
AC Power	6.13A	3.02A	2.60A
Power Factor	0.98	0.98	0.97

SPACING REFERENCE

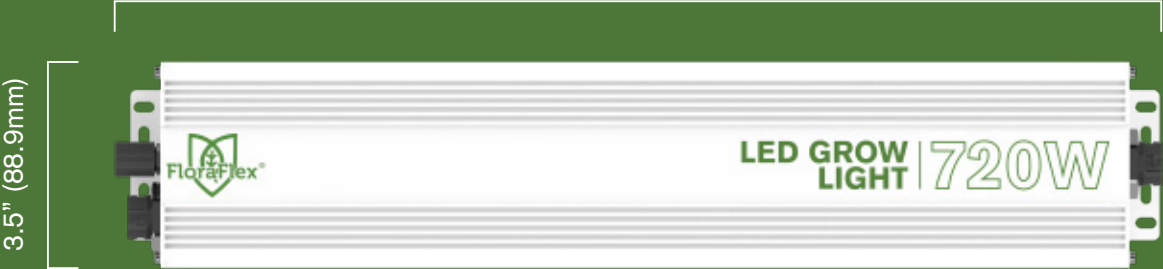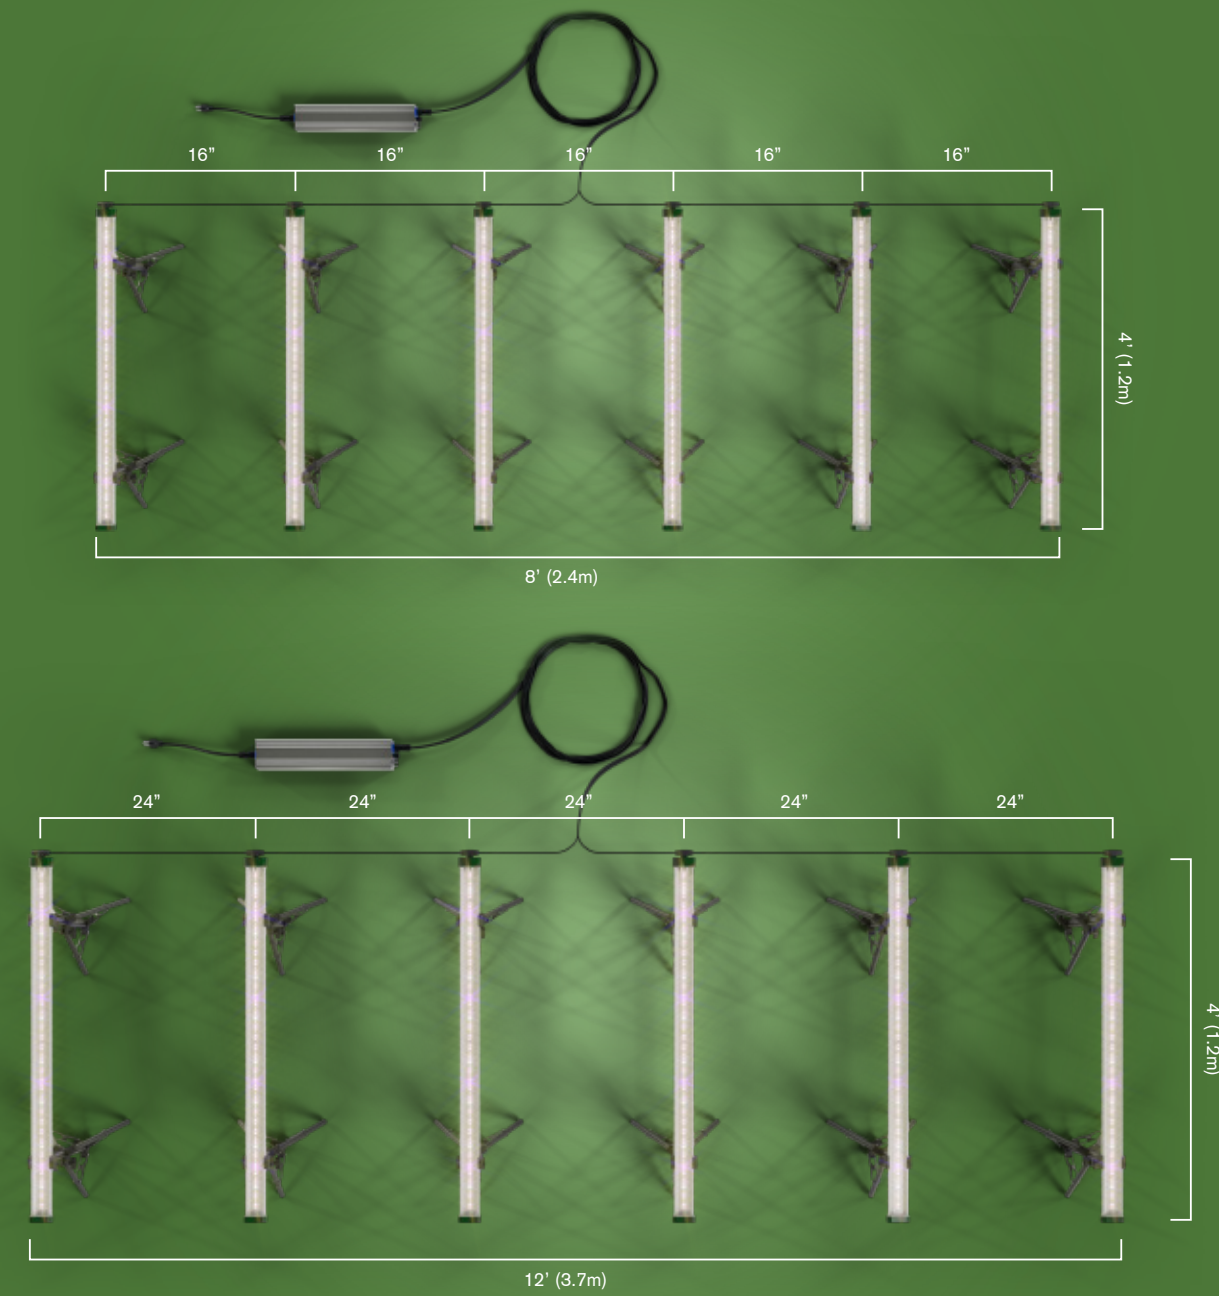

GUARANTEED BY:

FLORAFLEX CORP.
4804 LAUREL CANYON BLVD.,
SUITE 1047, STUDIO CITY, CA 91607
WWW.FLORAFLEX.COM
855-855-1053



R & D

PPFD CHART @ 12"

354	492	583	605	605	583	492	354
410	576	695	723	723	695	576	410
451	609	725	763	763	725	609	451
482	646	766	802	802	766	646	482
482	646	766	802	802	766	646	482
451	609	725	763	763	725	609	451
410	576	695	723	723	695	576	410
354	492	583	605	605	583	492	354

4' x 4' Coverage



Dynamic




Shop FloraFlex



Product Review

SPECTRUM

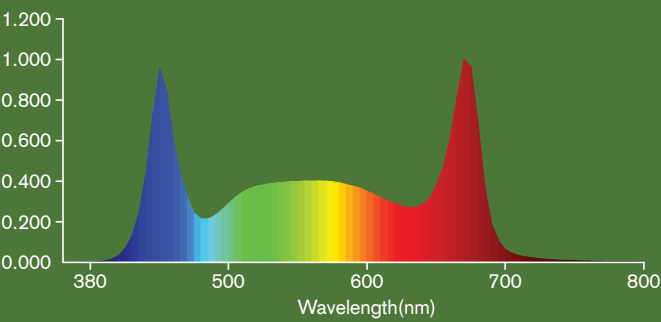

Certified by DLC Hort and rebate-eligible.
Scan to find out more.



Intertek

