nextlight MEGA

ON TICK MESS



Onboard Dimmer & External Dimming connections





nextlight.com




nextlight MEGA

Package Contents

1 Fixture **x1**

- 2 Fixture Hooks x2
- 3 NextLight Pro Series Power Cord (10') x1 (see available Power Cord Voltage Options)
- 4 NextLight Pro Series Control Cable (10') x1






Power Cord Voltage Options

 120V
 240V
 277V
 277V

 (NEMA 5 15P)
 (NEMA 6 15P)
 (TWIST LOCK)
 (OPEN ENDWINE

Product Dimensions



©2021 NextLight. All Rights Reserved.

Technical Specifications

SPECIFICATION	NEXTLIGHT MEGA PRO
Operating Voltage	120-277 VAC
Operating Frequency	50/60 Hz
Input Current	5.34A @ 120V, 2.67A @ 240V, 2.32A @ 277V
PPF	1650
Energy Use	640 Watts (629W @ 277V)
PPF/Watt	2.6
Operating Temperature	-4°F to 104°F (-20°C to 40°C)
BTU Output	2185
Dimensions (in)	37.75 x 36.75 x 3.25
Dimensions (mm)	957 x 933 x 77.3
Weight	26 lbs (11.79 kg)
Warranty	5 Year Full
Life Rating	Q90 > 50,000 Hours
Certifications	DLC Hort, CE, UL 8800
Environment	IP65, Wet Rated

Onboard Dimmer


The Onboard Dimmer allows you to toggle Dim values of 0%, 25%, 50%, 75%, 100% and EXT for external use with *NextLight Control Pro* or *NextLight Adapt Pro*.



NextLight Full Spectrum LED

NextLight fixtures emit a full spectrum, bright white light which is more sun-like than even your traditional HPS. Using this spectrum you can expect tighter internodal spacing and better overall quality.

NextLight's Full Spectrum is easy to work under and provides the same sun-like qualities plants love without the negatives of high energy requirements and high heat.

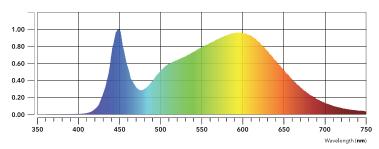

nextlight.com

1