



Owner's Manual

Introduction

The Digital Mini Preamp series Incredible V is a compact stompbox that reproduces the tones of two classic guitar amplifiers.

Precautions

READ CAREFULLY BEFORE PROCEEDING

Please keep this manual in a convenient place for future reference.

Power Supply

Always use a DC 9V center negative AC adapter. Use of an adapter other than that specified could damage the unit or cause malfunction and pose a safety hazard.

Always connect the AC adapter to an AC outlet that supplies the rated voltage required by the adapter. Disconnect the AC adapter from the AC outlet when during lightning storms or not using the unit for an extended period.

Connections

Always turn off the power before connecting or disconnecting. Make sure to disconnect all cables and AC adapter before moving the unit. This will help prevent malfunction and damages.

Environment Considerations

Avoid using the unit in any of the following conditions that could cause malfunction:

- Extremely hot or cold places
- Under direct sunlight
- Magnetic fields
- Near heaters and other heat sources
- Sandy or dusty places
- Places that are extremely humid or exposed to splashing water
- Places with lots of vibrations

Electrical Interference

Devices that are very susceptible to interference or that emits powerful electromagnetic waves (e.g. radios and TVs) should not be placed near this unit, as interference could occur.

Electromagnetic interference could cause malfunction and could corrupt or destroy data.

Always operate this unit at a suitable

distance from these devices.

Handling

Do not apply excessive force to the switches and other controls, exposing the unit to strong impacts, which could cause it to break.

Do not put foreign objects or liquids into the unit.

Never open the case or attempt to modify the product in any way since this can result in damage to the unit.

Clean only with a soft, dry cloth.

Overview

● Selectable amp tones

With two classic amplifier models, the Fender '65 Twin Reverb* and Marshall Super Lead 1959*, this preamp allows you to toggle between both clean and crunch channels using a single footswitch.

● Easy, flexible controls

With a three band EQ and gain and volume control, adjusting this pedal is just like working with an amplifier. The on-board reverb is a bonus to give your tone more depth. Optional CAB SIM lets you add a cab simulator to the tone.


● Two-mode footswitch

The footswitch can be configured as an on/off switch or an A/B channel switch.

● Carefully selected components

The Incredible V pedal was designed and manufactured with quality components for exceptional sound and sturdy performance. The aluminum alloy casing and all metal footswitch ensure road worthy reliability.

Connections & Controls

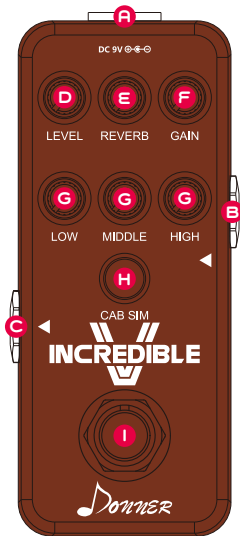

A DC 9V Jack:

For power supply, use a 9-volt DC regulated by AC adapter, 500mA (plug polarity is positive on the barrel and negative in the center).

B Input Jack:

1/4" mono audio jack, for connecting instrument.

C Output Jack:

1/4" mono audio jack, for connecting to an amplifier.

D LEVEL Knob:

Adjusts the effect output.

E REVERB Knob:

Adjusts the reverb level.

F GAIN Knob:

Adjusts the effect gain amount.

G LOW/MIDDLE/HIGH Knob:

3-band EQ for tone shaping.

H CAB SIM Button (with LED):

Press to switch the cab simulator on/off (the LED will continue flashing while the cab simulator is on). Press and hold to switch between the two channels:

Channel A: based on Fender '65 Twin Reverb* (Clean, green LED);

Channel B: based on Marshall Super Lead 1959* (Crunch, red LED).

I Footswitch Modes:

The footswitch can be configured as an on/off switch (mode 1) or an A/B channel switch (mode 2). The default is mode 1. To switch to mode 2, press and hold the footswitch for 2 seconds when the pedal is on.

The LED will flash to indicate mode selection. In mode 2, the pedal cannot be bypassed; tapping the footswitch means toggling between channels. To switch back to mode 1, press and hold the footswitch for 2 seconds again.

Features

- Convenient compact size
- Digital circuit design
- Two-channel preamp with organic tube amp sound
- Sounds based on Fender '65 Twin Reverb* and Marshall Super Lead 1959*
- Built-in reverb and cabinet simulator

Specifications

Power Requirement: 9V DC center negative

Current Consumption: 200mA

Dimensions: 42x93.5x52mm

Weight: 230g



www.donnerdeal.com

**The mentioned manufacturers and product names are trademarks or registered trademarks of their respective owners which were used merely to identify the sound character of this product.*