

Wireless Turbidity Sensor RA0710 Data Sheet

Wireless Sensor Network Based on LoRa Technology



RA0710

Copyright©Netvox Technology Co., Ltd.

This document contains proprietary technical information which is the property of NETVOX Technology. It shall be maintained in strict confidence and shall not be disclosed to other parties, in whole or in part, without written permission of NETVOX Technology.

The specifications are subject to change without prior notice.



 **LoRa Alliance Member™** **zigbee alliance member**

Wireless Turbidity Sensor

General Description

The RA0710 is connected to the ZS-206 integrated online turbidity sensor, and the ZS-206 is designed and manufactured using the principle of scattered light turbidity measurement. The LoRa module of the RA0710 communicates with the turbidity sensor in the form of RS485 communication to obtain the current turbidity signal value and display it through the wireless gateway.

Principle of Operation

When a beam of light is incident on a water sample, the light is scattered by the turbidity substance in the water sample, and the intensity of the scattered light in the direction perpendicular to the incident light is measured and compared with the internal calibration value to calculate the turbidity in the water sample which will be linearized to output the final value.

Example Applications

- Water quality turbidity test
- Smart washing machine
- Other

Features of NETVOX Sensors

- Wireless range of 10 km *1
- LoRaWAN™ Class A compatible
- Frequency Hopping Spread Spectrum (FHSS)
- Improved interference immunity
- Improved power management for longer battery life
- Encrypt-RF™ Security (Diffie-Hellman Key Exchange + AES-128 CBC for sensor data messages)
- Battery Life*2:

Please refer to web: http://www.netvox.com.tw/electric/electric_calc.html

At this website, users can find battery life time for varier models at different configurations.


- Over-the-air updates (future)
- Third-Party online wireless sensor monitoring and notification system to configure sensors, view data and set alerts via SMS text and email (optional)
- Available third-party platform: Actility/ThingPark, TTN, MyDevices/Cayenne

*1. Actual range may vary depending on environment.

*2. Battery life is determined by sensor reporting frequency and other variables

Wireless Turbidity Sensor

Technical Specifications

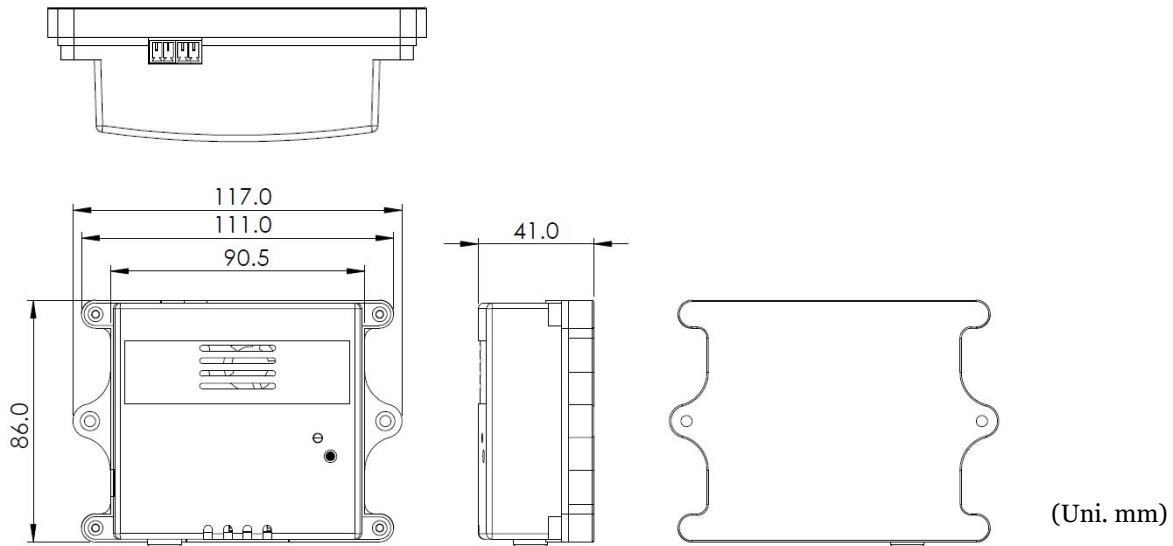

Electric

Power Supply Power Supply	DC Power Supply, DC12V/1A
Operating current 1	50mA (no RF signal emission)
Operating current 2	90mA (with RF signal emission)

Turbidity Sensor

Model	ZS-206
Measuring principle	Scattered light method
Range	0-1000NTU
Resolution	0.1NTU, 0.1°C
Accuracy	±5% F.S., ±0.5°C
Correction Function	Supported
Temperature Compensation	Supported
Output Mode	RS-485 bus, MODBUS-RTU protocol
Working Conditions	0-50 ° C, <0.2MPa
Storage Temperature	-5°C - 65°C
Installation Method	3/4" NPT thread, immersion installation
Cable Length	5 meters, other lengths can be customized
Power Supply	12V-24VDC ±10%
Protection Level	IP68

Wireless Turbidity Sensor

Frequency

TX Power	19dBm±1dBm
Rx Sensitivity	-136dBm (LoRa, Spreading Factor=12, Bit Rate=293bps) -121dBm (FSK,Frequency deviation=5kHz, Bit Rate=1.2kbps)
Antenna Type	Build-in antenna
Communication Range	10 km (line-of-sight, the actual transmission distance depends on the environment)
Data Transfer Rate	0.3kbps~50kbps
Spread Technique	LoRa/FSK
Available Frequency	EU863-870, US902-928, AU915-928, KR920-923, AS923, CN470-510 Configured before shipment

Physical

Dimension	111mm*86mm*41mm
Working Temp	-20° C ~ +55° C
Storage Temp	-40°C ~ +85°C
Humidity Detecting Range	<90%RH

Contact:
NETVOX TECHNOLOGY CO., LTD.
TEL: 886-6-2617641
FAX: 886-6-2656120
E-mail: sales@netvox.com.tw
WEB: www.netvox.com.tw
NETVOX TECHNOLOGY CO., LTD (XIAMEN)
TEL: 86-592-5717188
FAX: 86-592-5717180
E-mail: dyx@netvox.com.cn
WEB: www.netvox.com.cn


LoRa Alliance Member™ 