

PREPARING THE PRODUCT

1. Preparing the LED Flashlight

1



Open the upper cover
and prepare 1 x AAA
Alkaline battery

2



Insert the battery
observing the proper
polarity +/-

3



Close the cover
and rotate it
clockwise

Note: If the LED Flashlight shall not be used for an extended period of time, remove the battery. As soon as the LED Flashlight no longer functions reliably, insert new batteries and/or charge the rechargeable batteries.

2. Preparing the HOOKLINKER

1



2



Unwind the screw to
the end position

3



Snap the hook
into the Hooklinker

4



Swing the screw to its original
position and tighten it

5




Attach the LED flashlight
to the plastic frame

HOW TO USE THE HOOKLINKER



1. WITH STEEL SNAP HOOK

1. Secure the mooring rope with bowline knot or similar to the steel snap hook (carabiner).
2. Open the safety latch of the steel snap hook and attach the hook to the HOOGLINKER (observe the proper angle).
3. Hook the carabiner to a steel ring and push the telescopic hook and at same time pull the rope connected to the snap hook.
4. As the snap hook has a limited capacity, it is necessary to place an additional safety mooring (berthing) rope through the ring or buoy ring.

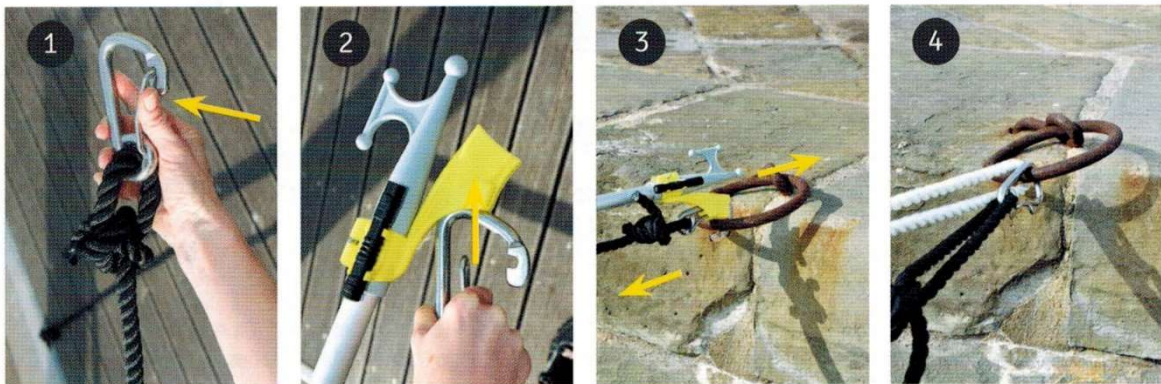

2. WITH BOATASY GHOOK

1. Before usage adjust the lazy line (mooring line) as per instruction below.

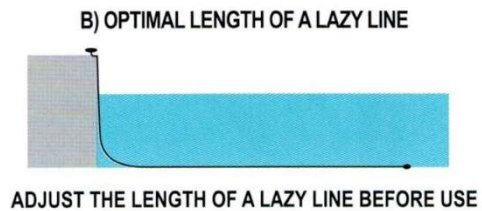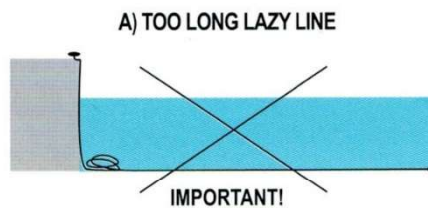

2. Insert GHOOK into Hooklinker plastic holder.
3. Pick the lazy line with the telescopic hook and attached Hooklinker.
4. Disconnect the Hooklinker from telescopic hook and proceed toward the mooring cleat.

