



# SmarterFresh Faucet Sprayer Bidet Installation

## Model SF-W60

### INCLUDED IN BOX:

- Stainless Steel Bidet Sprayer Head
- Stainless Steel Bidet Hose with PEX Inner Tube
- Bidet Hook Holder for Toilet Tank (Transition to Wall Mount Included)
- Faucet Diverter with Aerator

### INCLUDED IN BAG:

- Male Threaded Adapter
- 2 Rubber Washers
- Blue Screw Key to Remove/Clean Faucet Diverter Aerator (future use)

**Warning:** Threads on *Male Threaded Adapter* May be Sharp When Handling, Proceed with Caution

**STEP 1:** At bathroom faucet, use hand to unscrew the aerator from bottom of faucet (**FIGURE A**). If it will not budge, consider using pliers to untighten, using a cloth around the aerator to protect from scratches.





### DETERMINING FAUCET TYPE:

A) Once aerator has been removed from faucet, if faucet has threads on the **outside** (Image 1), proceed **without** the provided *Male Threaded Adapter* and simply screw the *Faucet Diverter* into place. Make sure a clear rubber washer (found in bag) is in bottom of swivel nut on *Faucet Diverter* and screw into faucet, turning multiple times by hand to tighten into place. If faucet does not have male threads, move onto **Step B**; otherwise skip to '**Finishing Installation**' section.

**HINT:** If you have trouble screwing in *Faucet Diverter*, your bathroom faucet may *already* have a rubber washer inside faucet so be sure to check.

B) Once your faucet aerator has been removed, if faucet has threads on the **inside** (Image 2), use the provided *Male Threaded Adapter*. Screw *Male Threaded Adapter* into the swivel nut over the existing clear rubber washer that is seated flat inside the swivel nut. (**FIGURE B**).

The second rubber washer (found in bag) should be placed on the exterior, larger open side of the *Male Threaded Adapter* and should fit snug into grooves of the adapter. Then screw entire *Faucet Diverter* with attached *Male Threaded Adapter* into faucet, turning multiple times by hand to tighten into place. Again, if the *Adapter* does not screw in tightly, your bathroom faucet may already have a rubber washer inside the faucet or you can test the connection without the washer.

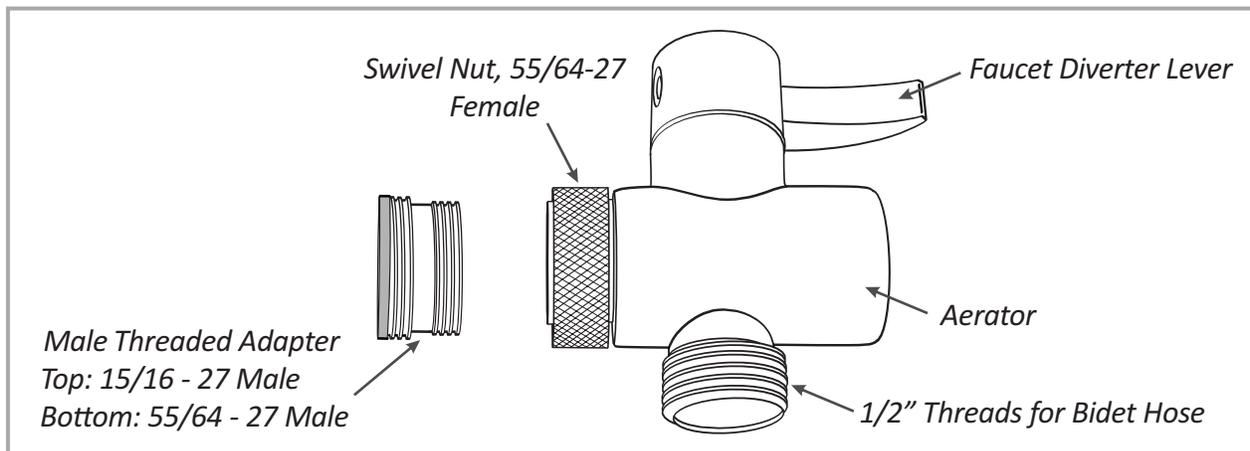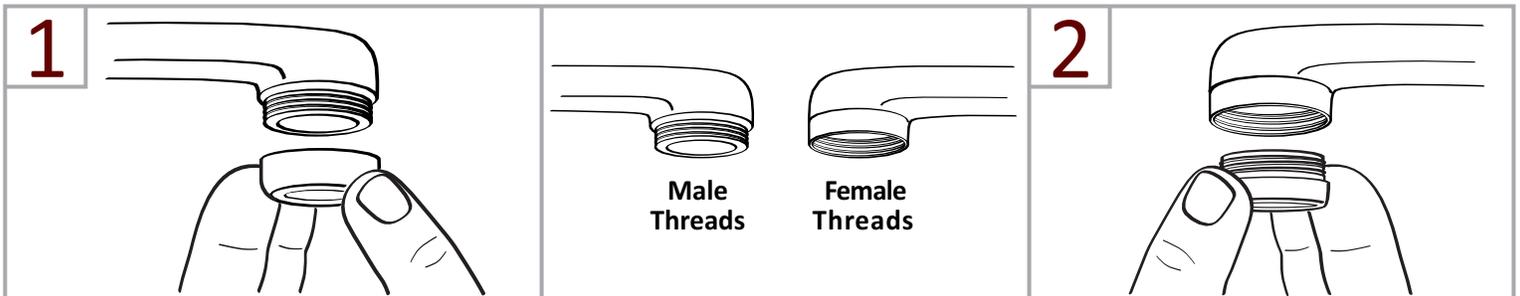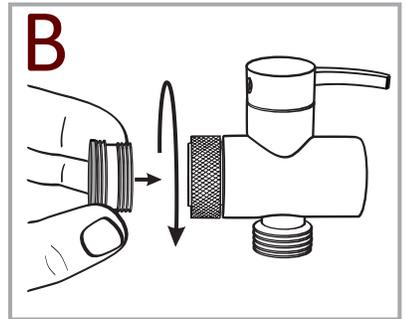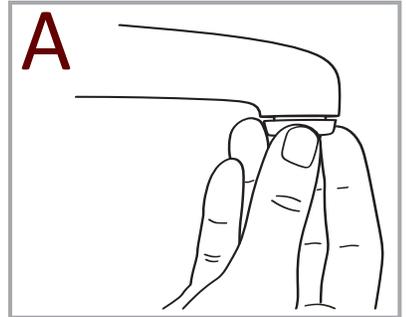



## Faucet Diverter or Male Threaded Adapter Doesn't Fit?

Please check the **STOP Card**  located inside the product packaging. It lists solutions to securing the right fit. We can send you a few different size adapters to test on your faucet or you may visit your local Ace Hardware that has a wide variety of adapters for situations just like this.

Our warm water bidet unit uses the most common aerator thread size -- the *Faucet Diverter* is 15/16-27 female. The *Male Threaded Adapter* is 15/16-27 male (bottom) and 55/64-27 male (top).

### FINISHING INSTALLATION:

- 1) Make sure *Faucet Diverter* lever is off (pointed down) and remaining diverter opening for the bidet hose is directed towards the toilet. **(FIGURE C)**. Turn on water to check for leaks. The water should flow smoothly down through the aerator into the sink. Turn water off before proceeding. (The included blue screw key will help remove the aerator from the *Faucet Diverter* in order to clean and maintain in the future).
- 2) Locate *Bidet Hose* and connect smaller end (hexagon shaped nut) to opening of *Faucet Diverter* and screw on tightly by hand.
- 3) Locate *Bidet Sprayer* head and affix to other end (conical shape) of bidet hose by hand.
- 4) Locate *Bidet Hook Holder* and affix to convenient location on toilet tank and place *Bidet Sprayer Head* inside *Bidet Hook Holder*, dropping in over the top of the holder. **(FIGURE D)**
- 5) Alternatively, wall mount the holder by disassembling the hook holder. With screwdriver, remove screws from backside of hook. Use provided long screws and anchors to attach holder to wall through two holes on front side of holder. Two sets of anchors are provided for different mounting surfaces.

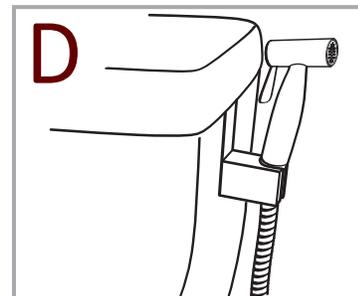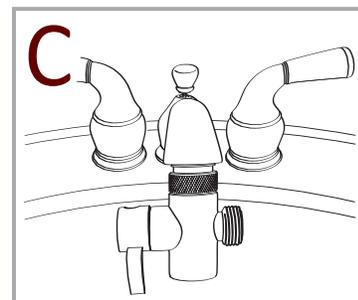

### OPERATION AND USAGE:

With the *Faucet Diverter* level still pointed down, turn on the hot water handle until a warm temperature is reached. Turn off the hot water and turn on cold water handle. Slowly turn on hot water again until the appropriate temperature has been reached. This is the correct approach to acquire the right temperature -- the hot water should never be turned on high and mixed with cold water because scalding can occur in conjunction with other water sources being used in your home. This includes toilets flushing or showers or faucets being used concurrently.

Once appropriate temperature has been reached, press the *Faucet Diverter* lever forward with your finger to activate and divert the water into the bidet hose and sprayer. Direct the hand held sprayer into the sink or toilet and press on the *Bidet Sprayer* lever to release flow of water and to confirm the correct water temperature before using.

Water spray is adjustable and will spray with high or low force (jet spray vs gentle rinsing) based on how much depression is placed on bidet sprayer head lever. The maximum water temperature for diverter is 135 degrees. Hotter temperatures than that can damage the rubber washers inside the diverter and male adapter.

Make sure to **turn off** bathroom faucet when finished and flush out remaining water from bidet hose after use by depressing the bidet sprayer head handle. This will remove water from hose and allow the hose to lay better.

The hand held bidet has many uses including female and male hygiene, cleaning toilets, sinks, or tub shower, cloth diaper cleaning, washing pets, etc.

### TROUBLESHOOTING:

- If leaking occurs where *Bidet Sprayer* head meets *Bidet Hose*, or where *Faucet Diverter* opening meets the *Bidet Hose*, detach either of those connections from the hose and check for existence of rubber washer or that the washer is lying flat and deep in hose. Retighten hose by hand or with rubber jar opener for maximum connection.

### WARNING MESSAGE:

**ALWAYS** turn off the bathroom faucet after using the SmarterFresh Warm Water bidet. If you choose to not turn off faucet, you risk weakening the internal components of the diverter, sprayer and hose, or exposing your home to water damage or flooding. Manufacturer is not responsible for damage which may have been caused by failure to follow this recommendation. **ALWAYS** make sure the hot water tank in home is set appropriately to prevent scalding from water. Our recommendation is to not use hot water from the faucet as this can make the sprayer and/or hose very hot to the touch.

Contact us for installation instructions or questions at [support@smarterfresh.com](mailto:support@smarterfresh.com).

Do NOT return product to retail store or online before contacting us.

 [www.SmarterFresh.com](http://www.SmarterFresh.com)