

SLIDE ISLAND



INSTRUCTION MANUAL



PRODUCT OVERVIEW

SLIDE MODE



WHAT'S INCLUDED



Slide Island



Carry Bag




Repair Kit*

1 *Glue not included due to shipping restrictions. Email info@lakesurf.com for a complimentary container of glue.

MAT MODE

PRODUCT OVERVIEW

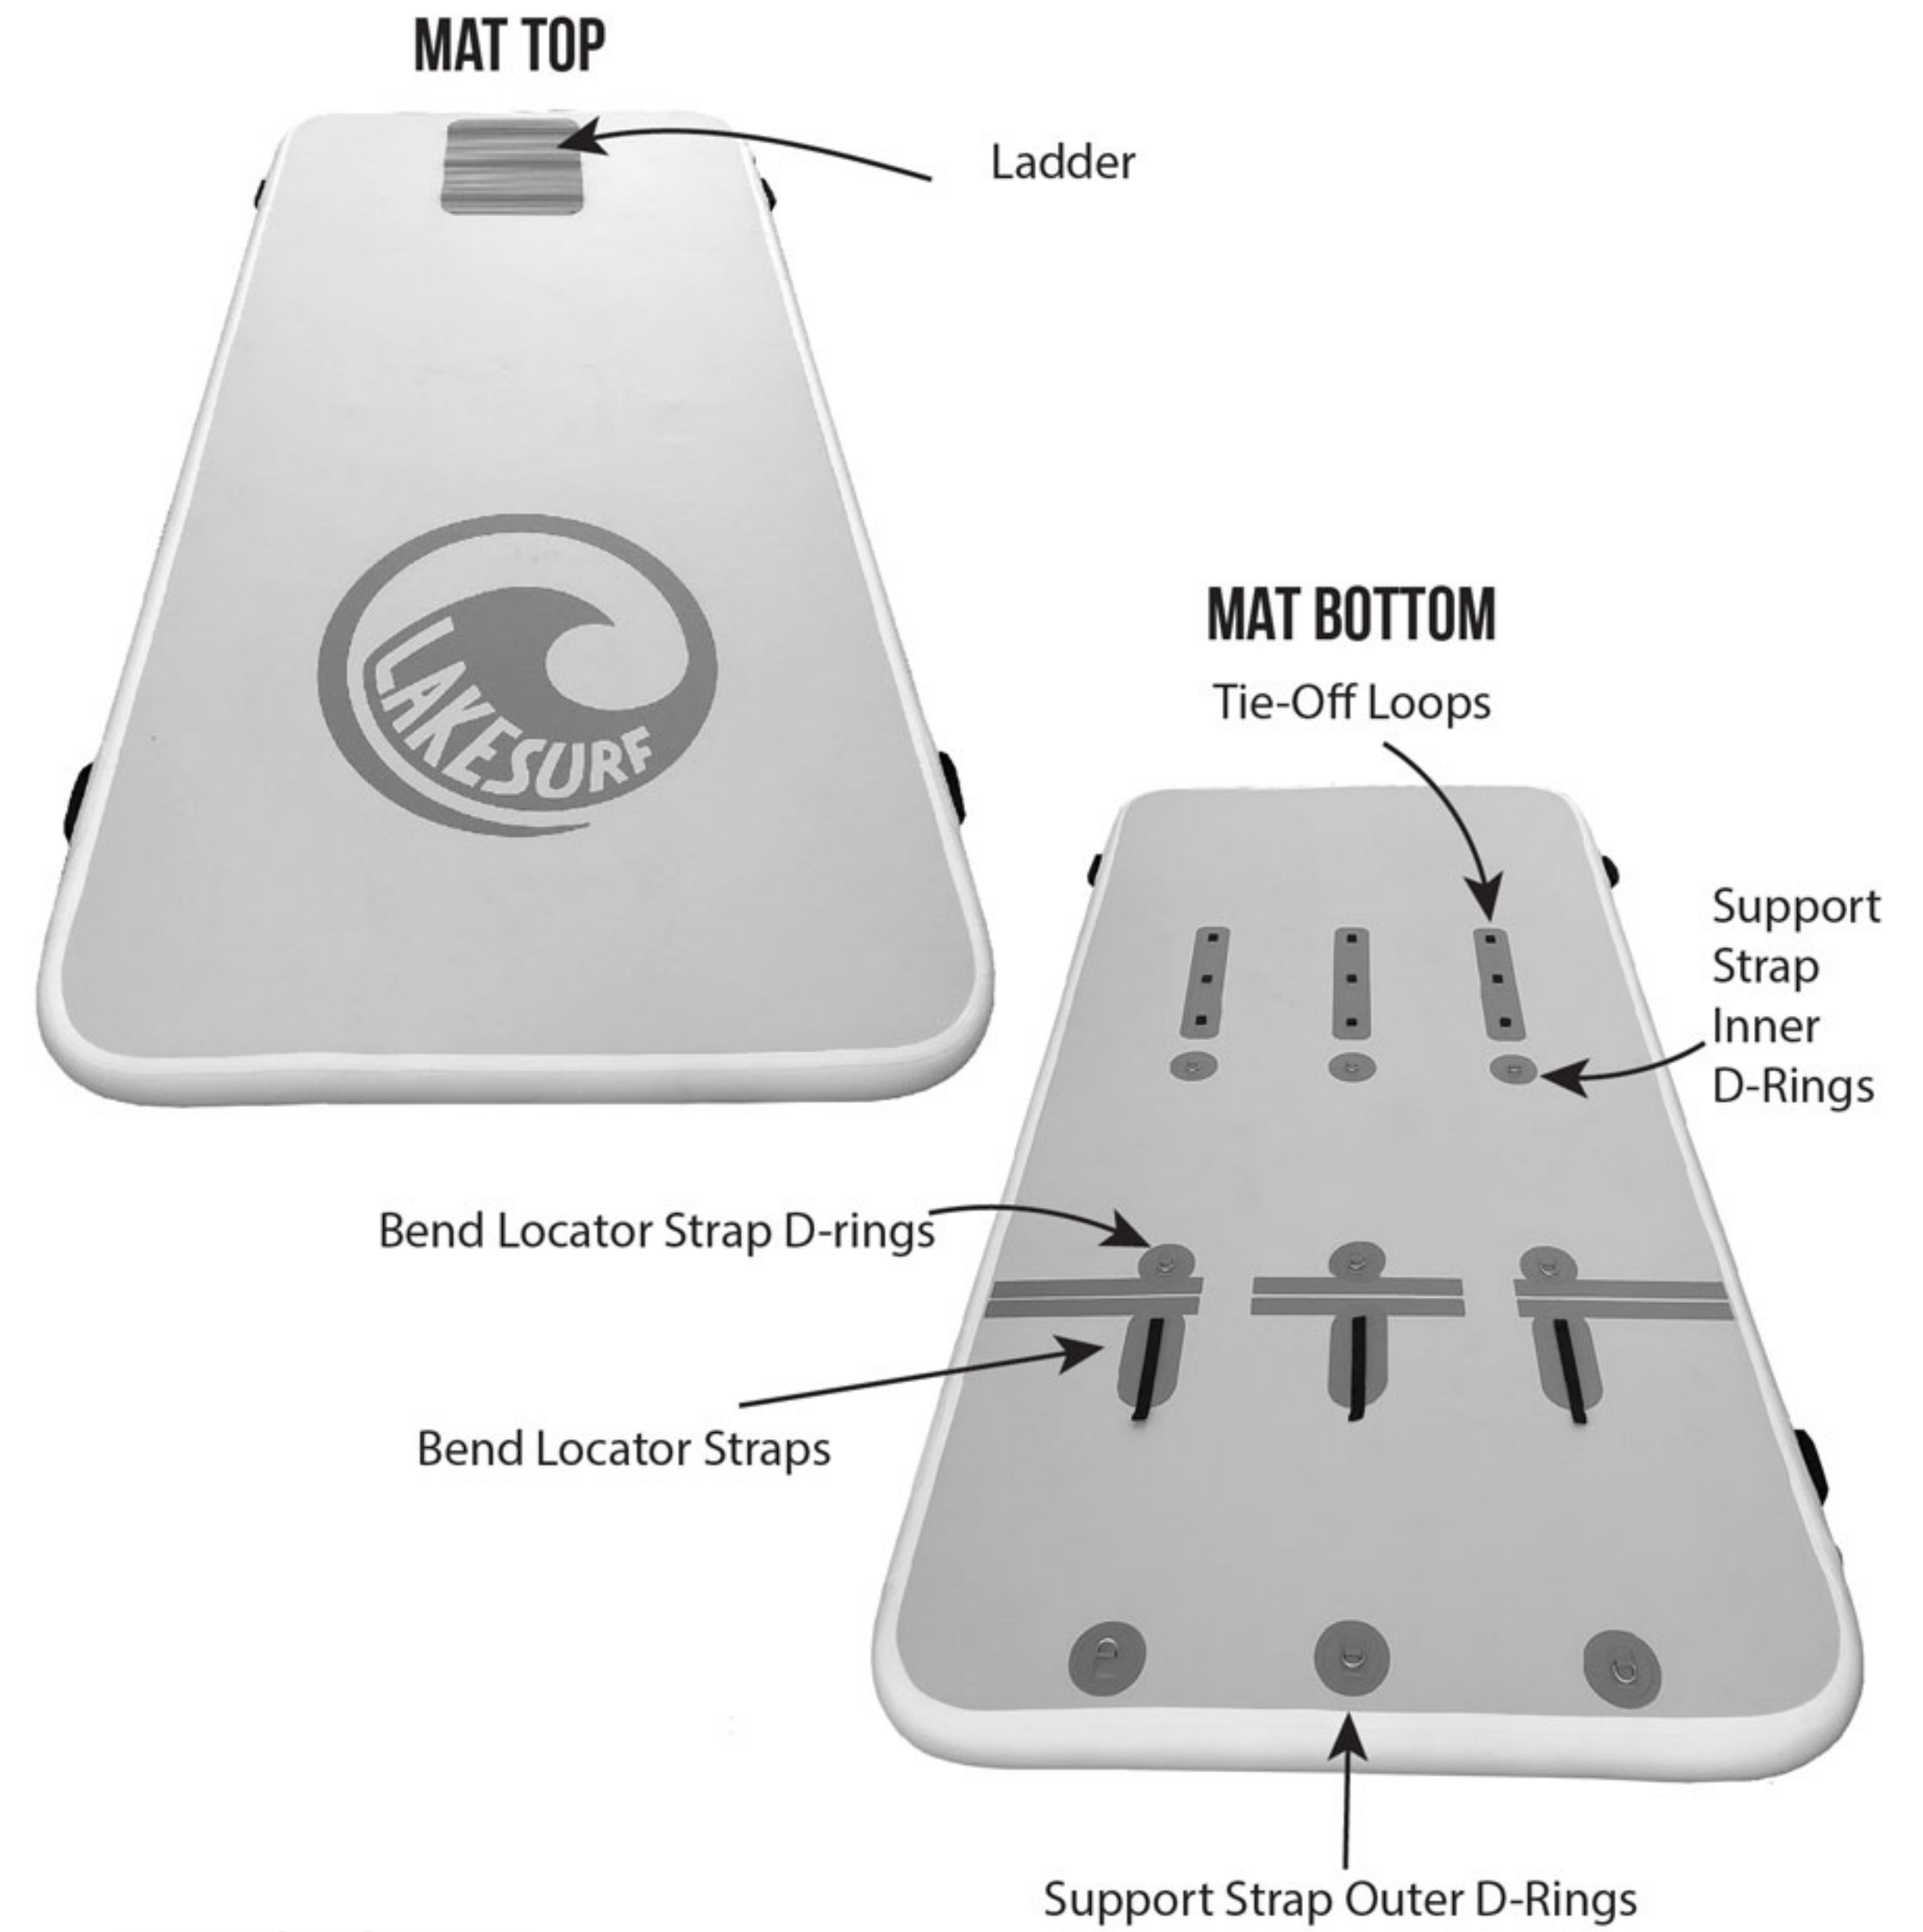


WHAT'S INCLUDED



Pump



Tie Off Rope

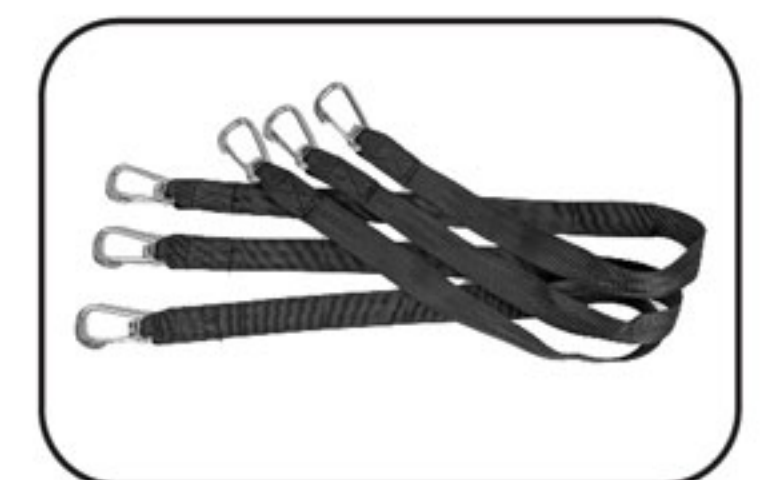

3 Support Straps


INFLATING / DEFLATING SLIDE ISLAND

TO INFLATE:

1. Remove valve cap by twisting **counter-clockwise** and pulling out.




2. Fully extend the valve stem by pressing it inward and twisting **counter-clockwise**.

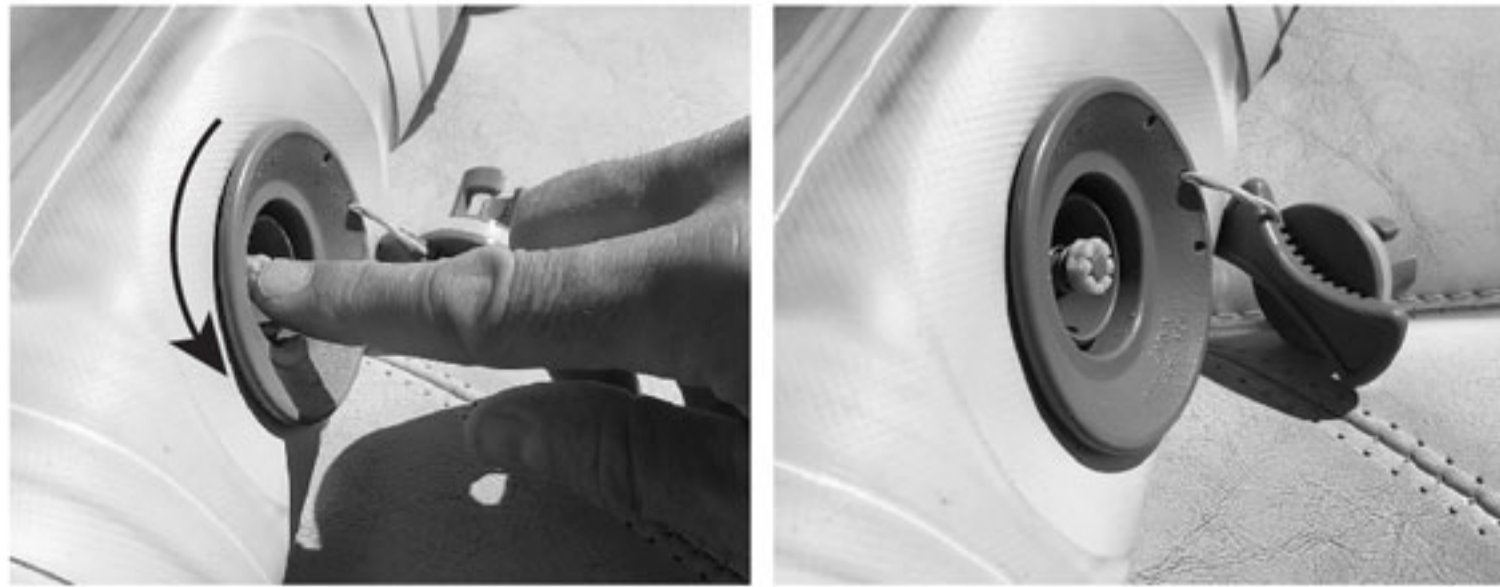

3. Insert the pump hose adapter into the valve and twist clockwise ¼ turn to secure. The valve will automatically open when the hose is inserted correctly.



4. Rotate lever to dual-action setting on the included hand pump and inflate until pumping becomes difficult, or about 5psi. Rotate lever to single-action setting and continue pumping until desired pressure is reached. Do not exceed 10psi.

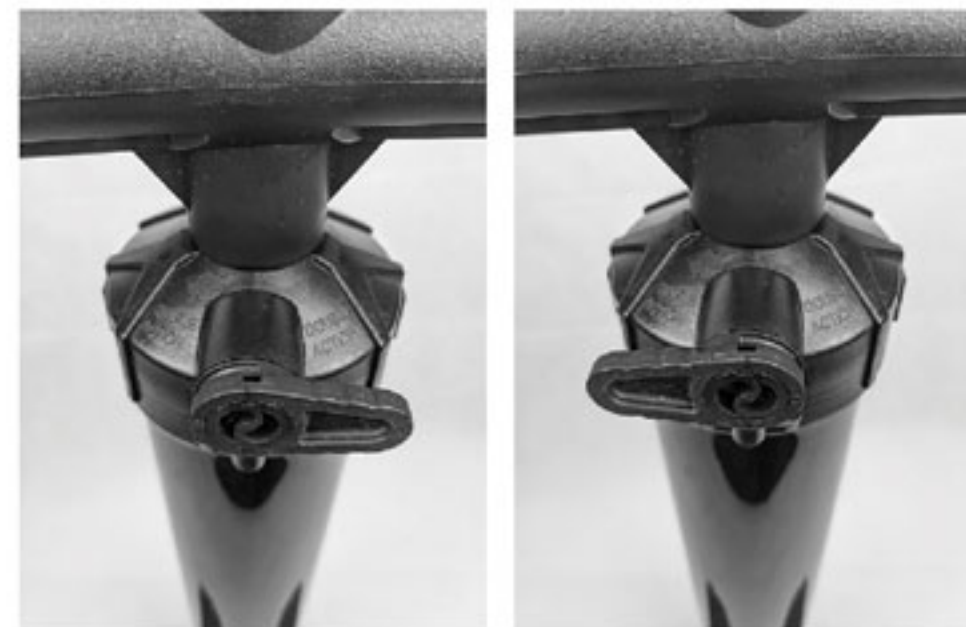

5. Detach pump and replace valve cap by inserting into valve and twisting **clockwise**.



TO DEFLATE:

1. Remove valve cap by twisting **counter-clockwise** and pulling out.



2. Lock valve in open position by depressing valve stem and twisting **clockwise**.



3. Force out air by folding and using body weight.



4. Close valve by depressing valve stem and twisting **counter-clockwise** to fully extend it.



5. Replace valve cap by inserting into valve and twisting **clockwise**.



USING SLIDE ISLAND IN SLIDE MODE

1. While deflated, engage all three **bend locator straps** by feeding each strap through its adjacent d-ring. Pull the straps tight and press the velcro sections together.




2. Attach all **three support straps** by connecting the clip at either end of each support strap to opposing sets of d-rings. Each strap should be attached to the **outer d-ring** on one end and its corresponding **inner D-ring** on the other end.




3. Inflate to desired firmness with included pump according to the **inflation/deflation instructions**. Inflate to at least 5psi but not more than 10psi.



4. Locate tie-off loop nearest the rearward cleat on side of boat by placing Slide Island on sun deck with slide extending off the side of the boat. Slide Island sides should not extend off sun deck more than 18 inches toward bow or stern.

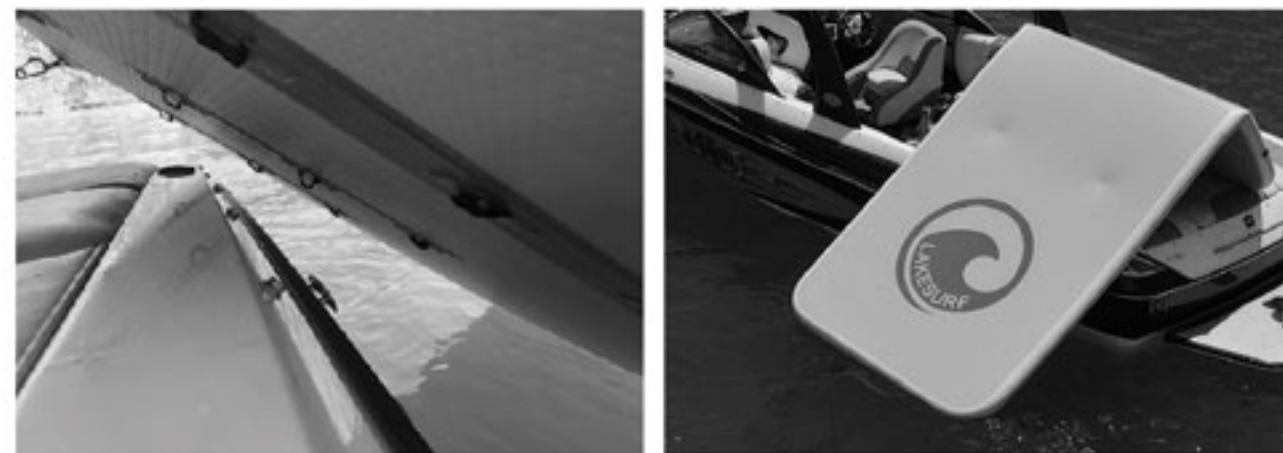

5. Attach the tie-off rope to the selected tie-off loop by feeding the loop end of the rope through the tie-off loop and then feeding the straight end of rope through the loop end and pulling tight.

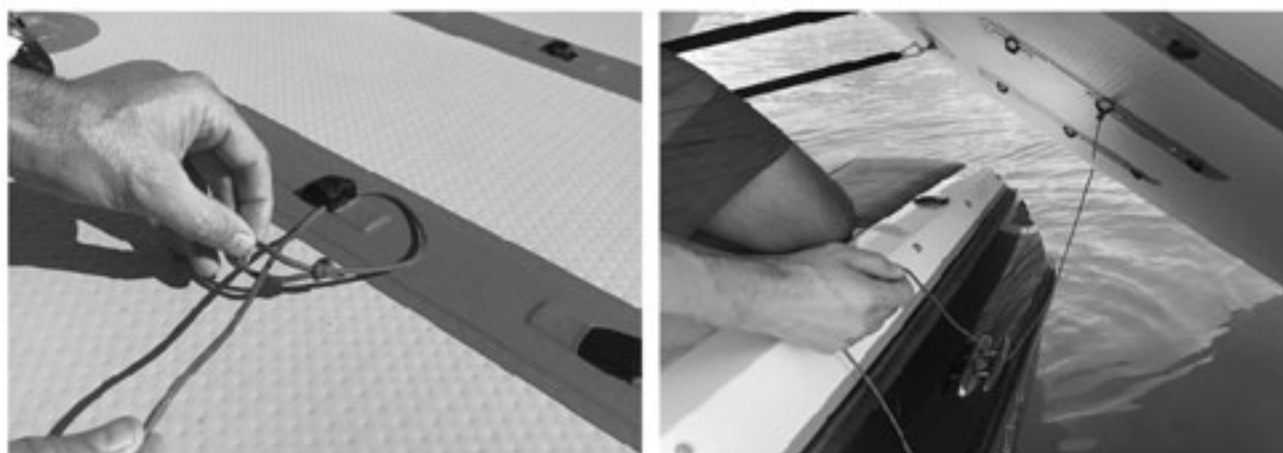

6. Secure Slide Island to your boat by feeding the tie-off rope through the rearward cleat on the side of your boat, pulling tight and tying off the rope on the forward cleat on the same side of the boat.



7. Thoroughly wet the slide surface before using the slide and periodically during use. Sliding when dry can cause minor skin burns.

USING SLIDE ISLAND IN MAT MODE

1. Roll out flat.



2. Inflate to desired firmness with included pump according to the inflation/deflation instructions. Do not exceed 10psi.



3. Tether mat to boat, dock, or other stationary object using provided tie-off rope.



4. Play or lounge!



HOW TO SWITCH MODES

From Mat Mode to Slide Mode: First partially deflate and then follow steps 1 to 7 in the Slide Mode section.

From Slide Mode to Mat Mode: First partially deflate so there is little tension remaining in the support straps. Release the support straps and bend locator straps and stow as shown in the Product Care section. Inflate to desired firmness.

PRODUCT CARE & MAINTENANCE

Inflatables like Slide Island are susceptible to damage from excessive sun, heat, dirt, mold, mildew, or abrasion. Following the care, maintenance, and repair recommendations below will allow you to enjoy your Slide Island for many years to come.

CLEANING:


It's a good idea to give slide island a thorough fresh water rinse after each use to remove any dirt, debris or salt water. For heavier soiling wash with soap and water or use an Inflatable Boat Cleaner. Be sure to thoroughly rinse off any soaps or cleaners with fresh water.

UV PROTECTION:

Slide Island materials are UV resistant, but long term exposure to the UV rays from the sun can still cause material degradation over time. Treatment with 303 Aerospace Protectant a couple of times per year can go a long way to prevent damage. When Slide Island is not in use, place it in the shade or store it in the included carry case.

STORAGE:

Store Slide Island in the included carry bag by folding it in thirds lengthwise, then folding widthwise with the first fold located at top of foam ladder. Lay out all four flaps of the carry bag and set the folded Slide Island in the middle. Fold over one set of flaps, do up the buckles, then repeat with the second set of flaps.

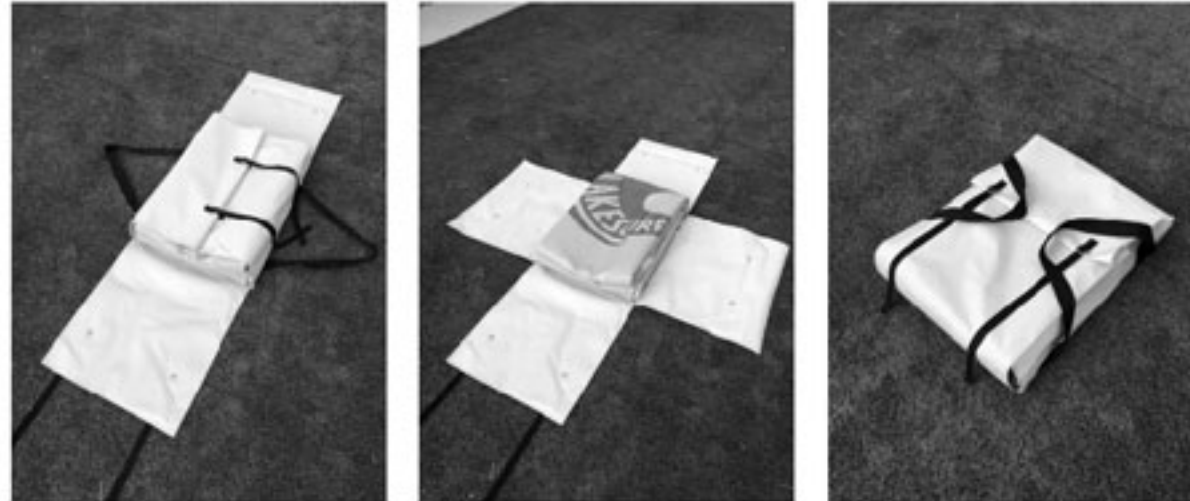

Store in a cool dry place, especially when storing for an extended period of time. If slide Island is stored damp, mold or mildew can grow and damage the materials. Do not expose Slide Island to excessive heat for extended periods.

HANDLING:

Slide Island is made from rugged PVC coated fabric that is abrasion and puncture resistant, but excessive wear or sharp objects can damage the material and result in leaks. Avoid dragging Slide Island on rough surfaces like pavement, and keep it away from sharp objects. Do not leave attached to a dock or boat overnight where wave action can result in abrasion from a hard object or surface.

USE:

On hot, sunny days periodically release a little bit of air to prevent excessive pressure from damaging the valve or seams. Do not use while wearing clothing with sharp buckles or zippers that may damage the surface of Slide Island.

PRODUCT REPAIR WITH INCLUDED KIT

Slide Island will very gradually lose air when left inflated for extended periods. This is normal and not a cause for concern. If you suspect a leak, spray Slide Island with a soap and water solution and look for any bubbles indicating the location of a leak. Leaks can be easily patched using the included repair kit according to the directions below:

Step 1 - Deflate Slide Island

Step 2 - Clean and completely dry the area surrounding the leak

Step 3 - Apply a thin layer of glue to an area slightly larger than the size of the patch as well as to the patch itself. Due to shipping restrictions, glue is not included with your repair kit. Email info@lakesurf.com to get a tube of glue shipped to you free of charge.

Step 4 - Let dry for 20 minutes and apply a second coat of glue to Slide Island and the patch.

Step 5 - Let dry for another 20 minutes.

Step 6 - Apply a third, and final, coat of adhesive to Slide Island and the patch and allow to dry for 3-5 minutes (preferably 3 minutes). If beyond this time, reactivate by applying an additional coat of adhesive. Bond when tacky.

Step 7 - Carefully align the patch and press both surfaces together.

Step 8 - Apply pressure to the entire glued surface using a roller if available. Roll every millimeter of patch in multiple directions, working from the inside to the outside of the patch.

Step 9 - Allow to cure for a full 24 hours before rolling up or inflating.

Sometimes air can leak from the valve when debris becomes lodged on the valve's sealing surfaces. A few quick bursts of air from depressing the valve stem will typically remove any blockages. If an air leak persists, reach out to Lakesurf customer care for assistance by emailing info@lakesurf.com.



PRODUCT WARRANTY

Slide Island is fully guaranteed to the original owner against defects in materials and workmanship for a period of one year from the date of purchase. Lakesurf is not responsible for the effects of normal wear and tear, accidents, abuse, alteration, modification, misuse or improper care, including sun damage, mold, or mildew.



To make a warranty claim email info@lakesurf.com and include 1) Description of the defect, 2) Photograph clearly showing the nature of the defect, and 3) Order number and name of purchaser. If the warranty claim is approved, Lakesurf will, at its sole discretion, repair or replace the defective item free of charge.

CONTACT INFORMATION



Lakesurf, LLC
29980 Technology Drive, Ste 9
Murrieta, CA 92563

www.lakesurf.com
info@lakesurf.com

 Lakesurf
 @lake.surf



See Slide Island in action! Scan for video instructions on how to set up Slide Island and more information.

WARNING

It is the owner's responsibility to read the instruction manual and instruct all users in the safe operation of this product. User ASSUMES ALL RISKS related to the use, or misuse, of this product. Please read this manual prior to inflating and using the product and keep for future reference. As with any water play equipment, recklessness, inexperience, misuse, or neglect of the equipment may result in SERIOUS INJURY or DEATH.

- Children should only use this product under strict adult supervision. This product is not a personal floatation device.
- Always wear a U.S. Coast Guard approved Type III (PFD) personal floatation device when using the product.
- Never place wrists or feet through handles.
- Do not use in water less than eight feet in depth.
- Maintain a safe distance from shore, docks, pilings or other hard objects.
- Ensure the product is securely attached to your boat per the instruction manual before using in slide mode.
- When in slide mode, do not exceed one person sliding at a time.
- Ensure all swimmers are clear of the area surrounding the bottom of the slide before sliding.
- Do not use while under the influence of alcohol or drugs.
- Take all reasonable precautions in the use and operation of your product.
- Know your own limits and act responsibly.
- Do not use where the potential exists for dangerous conditions.
- Periodically check all equipment to ensure safety. Replace any portion of the equipment that shows signs of wear.
- Never tow slide with boat or other watercraft
- Do not add any hardware or attachments not otherwise supplied by the manufacturer.

THE WARNINGS AND PRACTICES SET FORTH ABOVE REPRESENT SOME COMMON RISKS ENCOUNTERED BY USERS AND DOES NOT PURPORT TO COVER ALL INSTANCES OF RISK OR DANGER. PLEASE USE COMMON SENSE AND GOOD JUDGMENT.