



## 2008-10 Kawasaki ZX10R

### Installation Instructions



**JUICEBOX** PRO<sup>®</sup>  
Premium Fuel Controller

### PARTS LIST

- |   |                    |
|---|--------------------|
| 1 | Juice Box Pro™     |
| 1 | USB Cable          |
| 1 | Top Tune CD-ROM    |
| 1 | Installation Guide |
| 2 | Velcro             |
| 1 | Alcohol swab       |

**FOR RACE USE ONLY**

DOWNLOAD THE TOPTUNE SOFTWARE  
AND LATEST MAPS FROM OUR  
WEBSITE:


[www.twobros.com](http://www.twobros.com)

**PLEASE READ ALL DIRECTIONS BEFORE STARTING INSTALLATION**

401 S. Grand Ave. Santa Ana, CA 92705  
(800) 211-2767 [www.twobros.com](http://www.twobros.com)

# JUICEBOX PRO<sup>®</sup>

Premium Fuel Controller

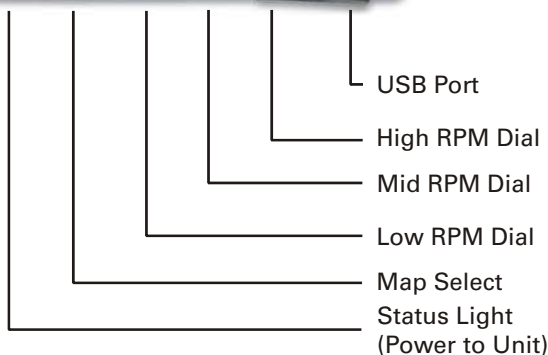

## Selecting the Map Position

The Juice Box Pro comes loaded with up to ten maps. Using a #1 Phillips screwdriver, turn the map select dial to toggle between the loaded maps. Refer to the map position table below for the maps included in your Juice Box Pro.

## Using the RPM Range Dials

The Low, Mid, and High RPM Dials refer to the RPM range, in thirds, of your vehicle. Each dial allows +/- 10% fuel adjustment on top of what fuel changes are done in the map. With the dial facing straight up, there is no additional fuel change. For example, if your vehicle revs to 15,000 RPM:

- the low RPM dial will adjust 0-5000 RPM
- the mid RPM dial will adjust 5001-10000 RPM
- the high RPM dial will adjust 10001-15000 RPM

## Using Top Tune

Take your tuning to the next level with the Top Tune software.

## Installing the Top Tune Software

- 1 Insert the CD provided into your computer's cd-rom drive. The launch program will run automatically. If auto-run is disabled, double-click the My Computer icon then double-click the CD drive icon. Double-click TBR Top Tune.exe to manually start the CD.
- 2 Click Install Software and follow the on-screen instructions to install the Top Tune software. The Top Tune software and maps will be stored in C:\Program Files\TBR Top Tune.
- 3 Click Map Database. All maps will automatically be installed to the C:\Program Files\TBR Top Tune\maps folder.

## Loading Additional Maps

- 1 Connect the USB cable from the computer to the Juice Box Pro. Verify the cable is fully seated in the Juice Box Pro.
- 2 Run the Top Tune software by double-clicking the program icon installed on your desktop or on your start menu.
- 3 Click Open Map File and select a map file.
- 4 Click Send Map. You can send the map to any of the ten map positions.

## Altering Maps Using Top Tune

The values in the map represent a percentage of fuel change over stock. A value of 10 in the map indicates at that throttle position and RPM range the vehicle will be 10% richer than stock. If the value is -10, then it would be 10% leaner than stock. You have the ability to fine tune your fuel curve by altering these values. The Top Tune software allows a value of +250 to -100 in each cell.

Position 0	Zero map	
Position 1	Stock exhaust Stock or aftermarket air filter	2008-2010 Kawasaki ZX10R
Position 2	Two Brothers VALE slip-on (retains the catalytic converter) Stock or aftermarket air filter	2008-2010 Kawasaki ZX-10
Position 3	Two Brothers Full exhaust	2008-2010 Kawasaki ZX-10

## **WARNING**

**The ignition must be turned OFF before installation.**

- 1 Remove the main seat and the passenger seat.
- 2 Remove the covers for each side of the fuel tank as shown in Figure A.
- 3 Prop the front of the fuel tank up.
- 4 Slide the junction box under the main seat from it's rubber sleeve. This will allow room for the Juice Box Pro harness.
- 5 Route the Juice Box Pro wiring harness underneath the sub frame crossover as shown in Figure B.
- 6 Unplug the brown 16-pin main wiring harness connector from the throttle bodies as shown in Figure C. This connector is located under the fuel tank on the right hand side of the bike.

Figure A



Figure B

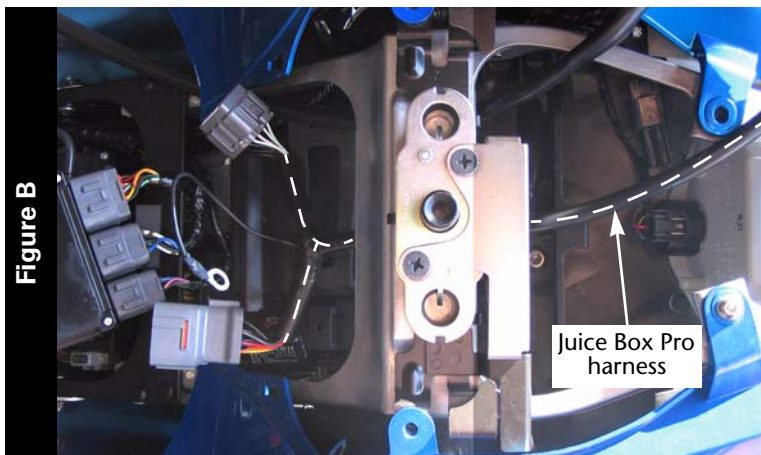


Figure C

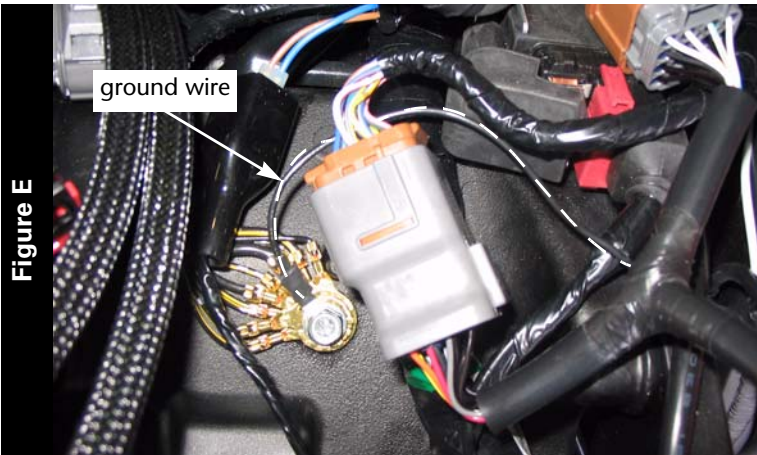


Figure D



- 7 Attach the Juice Box Pro connectors to the throttle body and the stock wiring harness as shown in Figure D.

Figure E



- 8 Attach the ground wire from the Juice Box Pro to the stock wiring harness chassis ground as shown in Figure E.  
This connection is next to the Juice Box Pro connection and starter relay.

Figure F



- 9 Using the supplied velcro, secure the Juice Box Pro in the tail section as shown in Figure F.  
Make sure to clean both surfaces with the alcohol swab before attaching.
- 10 Lower the fuel tank back into place.
- 11 Reinstall the covers.
- 12 Reinstall the passenger seat and the main seat.