



401 South Grand Ave., Santa Ana, CA 92705  
Tel: 714.550.6070 Fax: 714.550.9661 www.twobros.com

**Two Brothers Racing**  
**KLX/DR-Z110 Chain Roller**  
part # 022-6-39



**IMPORTANT - PLEASE READ CAREFULLY**


*We recommend that this performance part be installed by a qualified motorcycle technician. If you have any doubts as to your ability to install this performance part, please consult with your local motorcycle dealer. Read all instructions first before starting installation. Make sure the motorcycle and exhaust system are completely cool before starting the installation. Also, make sure the bike is secure on a centerstand or ideally a service lift during installation. Be sure to save all stock components for possible use later.*

**Warranty**

Two Brothers Racing products are intended for closed course competition purposes only, and therefore are sold "as is" without warranty. Two Brothers Racing specifically disclaims any warranties of merchantability or fitness for a particular purpose and disclaims all responsibility for consequential and incidental damages or any other losses arising from the use of these products or parts.

**Installation Instructions**

1. Make sure the bike is completely cool before starting the installation. Make sure the bike is secure on a centerstand or ideally a service lift.
2. Following the diagram below, mark frame 15mm from the inside edge and 10mm up from the bottom. This is where the chain roller will be installed

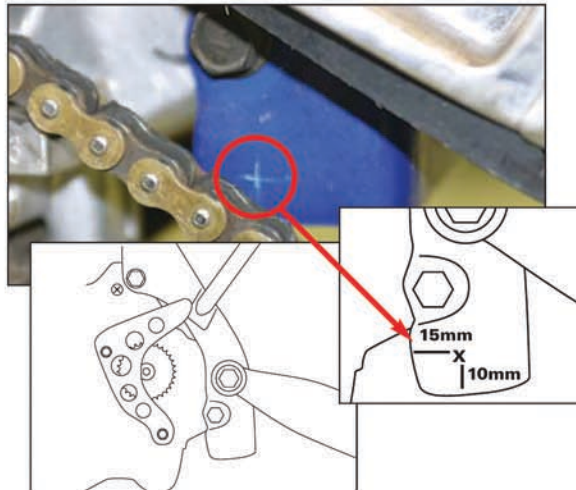


3. Drill a small pilot hole through the frame then drill and 8mm hole through the pilot hole



4. Clean and de-burr the hole on both sides.
5. On the supplied bolt assemble the chain roller components as shown:  
Washer > Roller > Washer > Spacer



6. Attach chain roller assembly to frame with the supplied locknut through the 8mm hole drilled through the frame, in step 3. Securely tighten bolt & locknut.

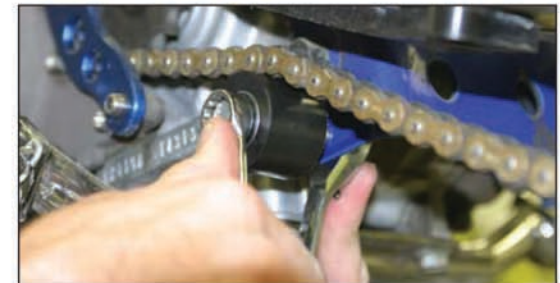

7. Double check to make sure that all hardware is tightened
8. After 50 to 100 miles, recheck all fasteners for tightness.