



401 South Grand Ave., Santa Ana, CA 92705  
Tel: 714.550.6070 Fax: 714.550.9661 www.twobros.com



In order to maintain optimal performance it is recommended that this spark arrester be cleaned after every 30 hours of use.

**Two Brothers Racing**  
**TBR-001 Screen Type Spark Arrestor**  
part # 005-105S



**IMPORTANT - PLEASE READ CAREFULLY**

We recommend that this performance part be installed by a qualified motorcycle technician. If you have any doubts as to your ability to install this performance part, please consult with your local motorcycle dealer. Read all instructions first before starting installation. Make sure the motorcycle and exhaust system are completely cool before starting the installation. Also, make sure the bike is secure on a centerstand or ideally a service lift during installation. Be sure to save all stock components for possible use later.

**Warranty**

Two Brothers Racing products are intended for closed course competition purposes only, and therefore are sold "as is" without warranty. Two Brothers Racing specifically disclaims any warranties of merchantability or fitness for a particular purpose and disclaims all responsibility for consequential and incidental damages or any other losses arising from the use of these products or parts.

**Maintenance Instructions**

1. Make sure the bike is completely cool before starting the installation. Make sure the bike is secure on a centerstand or ideally a service lift.
2. Remove the 6 bolts securing the endcap.




3. Remove endcap to expose spark arrester screen.



4. Remove spark arrester screen.



5. Vigorously brush spark arrester screen with a wire brush to remove accumulated residue.

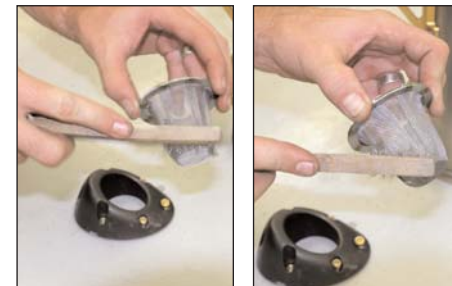

6. After cleaning, replace screen and endcap. Securely tighten the six endcap retaining bolts.
7. Before you run the bike, clean off all fingerprints and dirt, as any oily residue will etch the metal and become somewhat permanent when the system gets hot.