

LED Headlights
Installation Guide
For Toyota Land Cruiser FJ40

City Racer LLC

Time Estimate: 30 Minutes

Step 1 – Remove the bezel

Remove the grille bezel by undoing the mounting screws



Step 2 – Remove the existing lights

1. Disconnect the battery
2. Unplug the H4 connector behind each headlamp
3. Remove the old head lamp by undoing 3 headlight mounting screws and removing the headlight retaining ring. Note that there is no need to touch the headlight adjustment screws that secure the headlight bucket




Step 3 – Mount the new lights

Mount the new lights by reversing the previous step. Note the proper orientation as shown below. The light only fits into the headlight bucket one way. The headlight retaining ring may require some fiddling to get all 3 screws in.



Step 4 – Connect to the harness

Plug the light's H4 connector into the stock harness. Reconnect the battery and check both low beam and high beam.

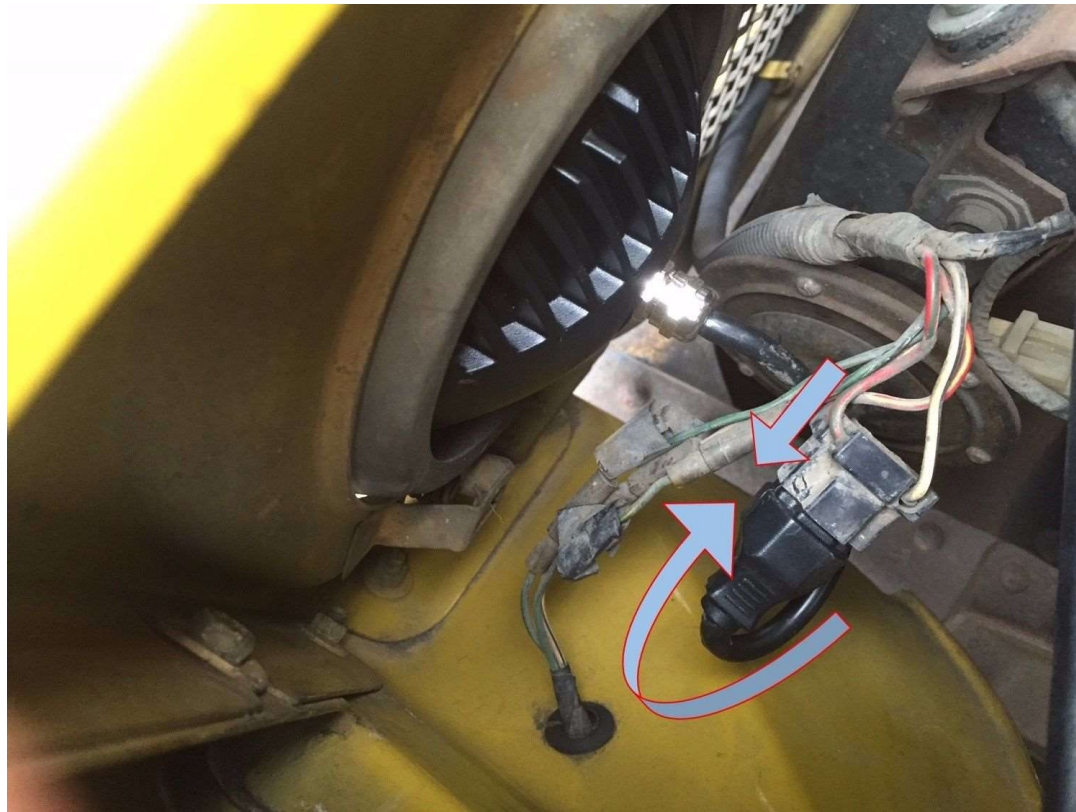

Appendix – H4 Connector Layout

