


B-5R2

BOLLARD

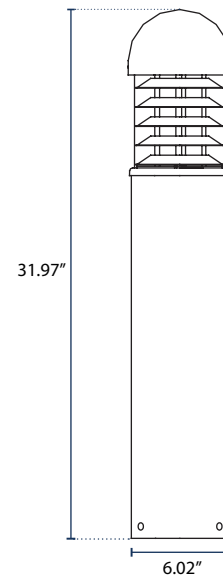

ALL ORDERING OPTIONS ARE BREX EXPRESS 

SPECIFICATIONS

Casting

Extruded Aluminum

Mounting

Qty. (3) 3/8"x16" Anchor Bolts

CRI

>70

Beam Angle

120°

LED's

Available Upon Request

Voltage

120-277V

Warranty

5-Year

Socket Size

E26 Medium

Finish

Die-Cast Aluminum

Efficiency

15 lm/W

ORDERING

BOLLARD	LAMP TYPE	CCT	WATTAGE	VOLTAGE	MOUNTING	FINISH
B-5R2	LED A19 BULB	3000K 4000K 5000K	12W	100-277V	SURFACE	DB Dark Bronze BK Black