


B-8L2
BOLLARD

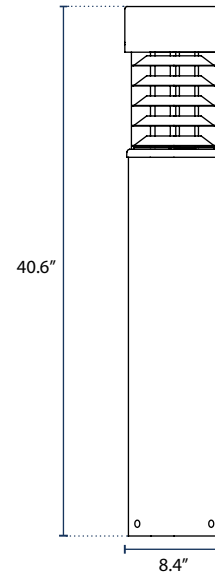

ALL ORDERING OPTIONS ARE BREX EXPRESS 

SPECIFICATIONS

| | | | |
|--|---|---------------------------|------------------------------|
| Casting Extruded Aluminum | Finish Die-Cast Aluminum | CRI >70 | Efficiency 70 lm/W |
| Driver Meanwell | Mounting Qty. (3) 3/8"x16" Anchor Bolts | Warranty 5-Year | |
| LED's Available Upon Request | Voltage 120-277V | Beam Angle 150° | |

ORDERING

| BOLLARD | LAMP TYPE | CCT | WATTAGE | VOLTAGE | MOUNTING | FINISH |
|--------------|-----------------------------|--------------|------------|-----------------|----------------|-----------------------|
| B-8L2 | INTEGRATED LED BOARD | | | 100-277V | SURFACE | |
| | | 3000K | 25W | | | DB Dark Bronze |
| | | 4000K | 35W | | | BK Black |
| | | 5000K | | | | |