


# Elements

by TCP

## LED Sports Light

### Product Specifications

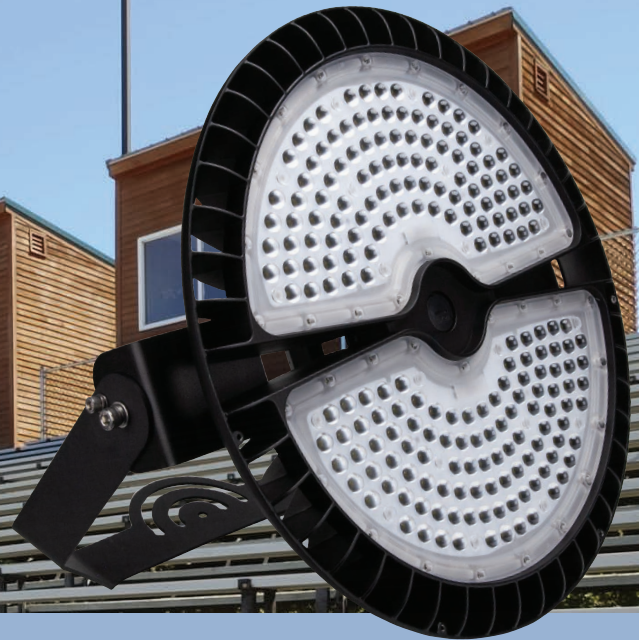

TCP's LED Sports Light is the perfect option for indoor and outdoor applications that require bright, energy efficient lighting. The Sports Light is rated to -40C for cold weather applications, comes standard with 0-10V dimming, 5700K CCT, and provides up to 47,500 lumens. Optional up-light shield accessory available to decrease glare and light pollution.

### Reasons to choose the LED Sports Light from TCP

- Long 50,000 hour rated life reduces maintenance and replacement costs
- Die-cast aluminum housing with impact resistant acrylic lens
- Yoke mounting comes standard for easy installation or retrofits
- Delivers bright, uniform light
- -40C temperature rating

### Ideal Applications

- Track Fields
- Indoor Soccer Fields
- Gymnasiums
- Football Stadiums
- Baseball Fields
- Golf Courses

## Applications

This product can be used in a variety of applications, including indoor stadiums and outdoor sports fields. The standard yoke mounting provides a versatile array of mounting options.

## Construction

- Die-cast aluminum housing
- Impact resistant acrylic lens
- Durable black powdercoat
- Industrial yoke mount


## Electrical

- Easily access wiring for quick installation
- System rated for long 50,000 hour life
- Efficiently delivers up to 148 LPW
- 4KV (line to ground) built in surge protection
- -40C (-40F) to 50C (131F) Operating Temperature Range
- Power factor > 0.95

## Optics

- Standard 30° degree distribution
- Delivers bright, white light and excellent uniformity

## Dimensions

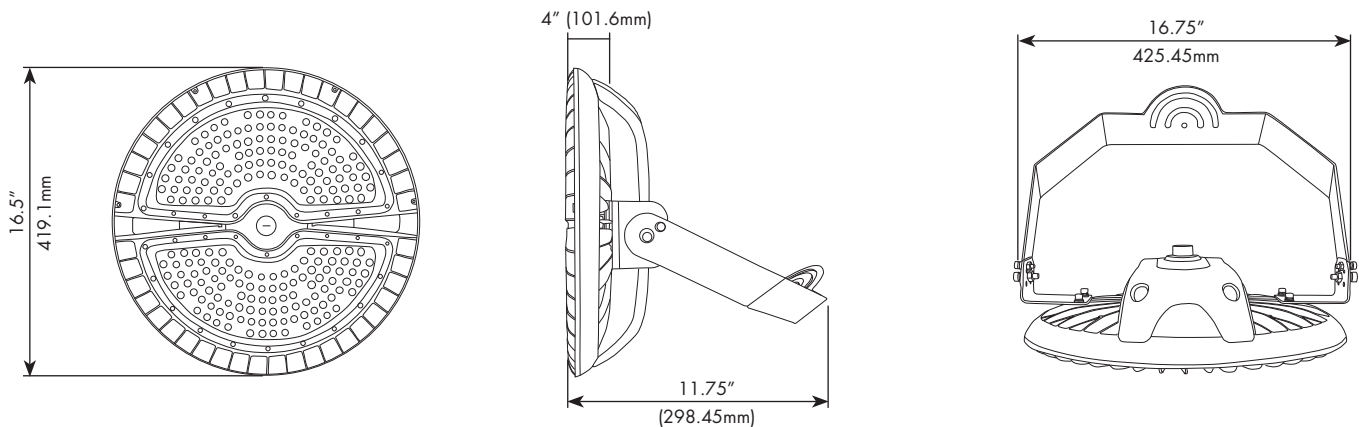

Item Number	
Notes	Type



### Listings

cULus Listed – wet location rated  
RoHS Compliant

### Warranty

Five year limited warranty against defects in manufacturing.

## Catalog Ordering Matrix

Example: SPUZDA457K30D

SP	U	ZD	A4	57K	30D
FAMILY	VOLTAGE	CONTROLS	LUMEN PACKAGE (Power) <sup>1,2</sup>	CCT	OPTIC
SP = LED Sports Light	U = 120V-277V	ZD = 0-10V Dimming	A4 = 47,500 Lumens (320W)	57K = 5700K	30D = 30° Distribution

<sup>1</sup> Approximate lumen output. Actual performance may vary based on CCT, options selected and end user application.  
<sup>2</sup> Actual wattage may differ by +/- 10%.

INDICATES BREX EXPRESS



### Field Installed Accessories

SPVISOR1 - Up-light visor accessory

For the most up-to-date specs and warranty information, please visit [www.tcp.com](http://www.tcp.com)