

PUMP DATA AND MOTOR DATA


n (rpm):	2900	Max permissible working pressure (bar):	6
H max (m):	15.40	H min (m):	5.60
Q min (mc/h):	3.60	Q max (mc/h):	18.00
Pn (kW):	0.75	Pn (HP):	1.00
Impeller diameter (mm):	113.00	2nd impeller diameter (mm):	0.00
Motor type:	IM	Motor phase:	3~
Un (V):	230/400	fn (Hz):	50
Poles:	2	In (A):	3,7 / 2,2
PF:	0,80	Insulation class:	F
Duty:	S1	Min liquid temperature (°C):	-10,00 °C
IE:	IE2-77,4	Weight (kg):	20.500

MATERIALS

Pump Casing:	Cast iron GJL 200 EN 1561	Suction Flange:	Cast iron GJL 200 EN 1561
Lantern Bracket:	Cast iron GJL 200 EN 1561	Impeller:	Cast iron GJL 200 EN 1561
Shaft:	Acciaio inox AISI 303	Mechanical Seal:	Carbon-Ceramic-NBR

DATE: 20/02/2017

60F00381000: A 40-110A/A 230/400/50 HZ

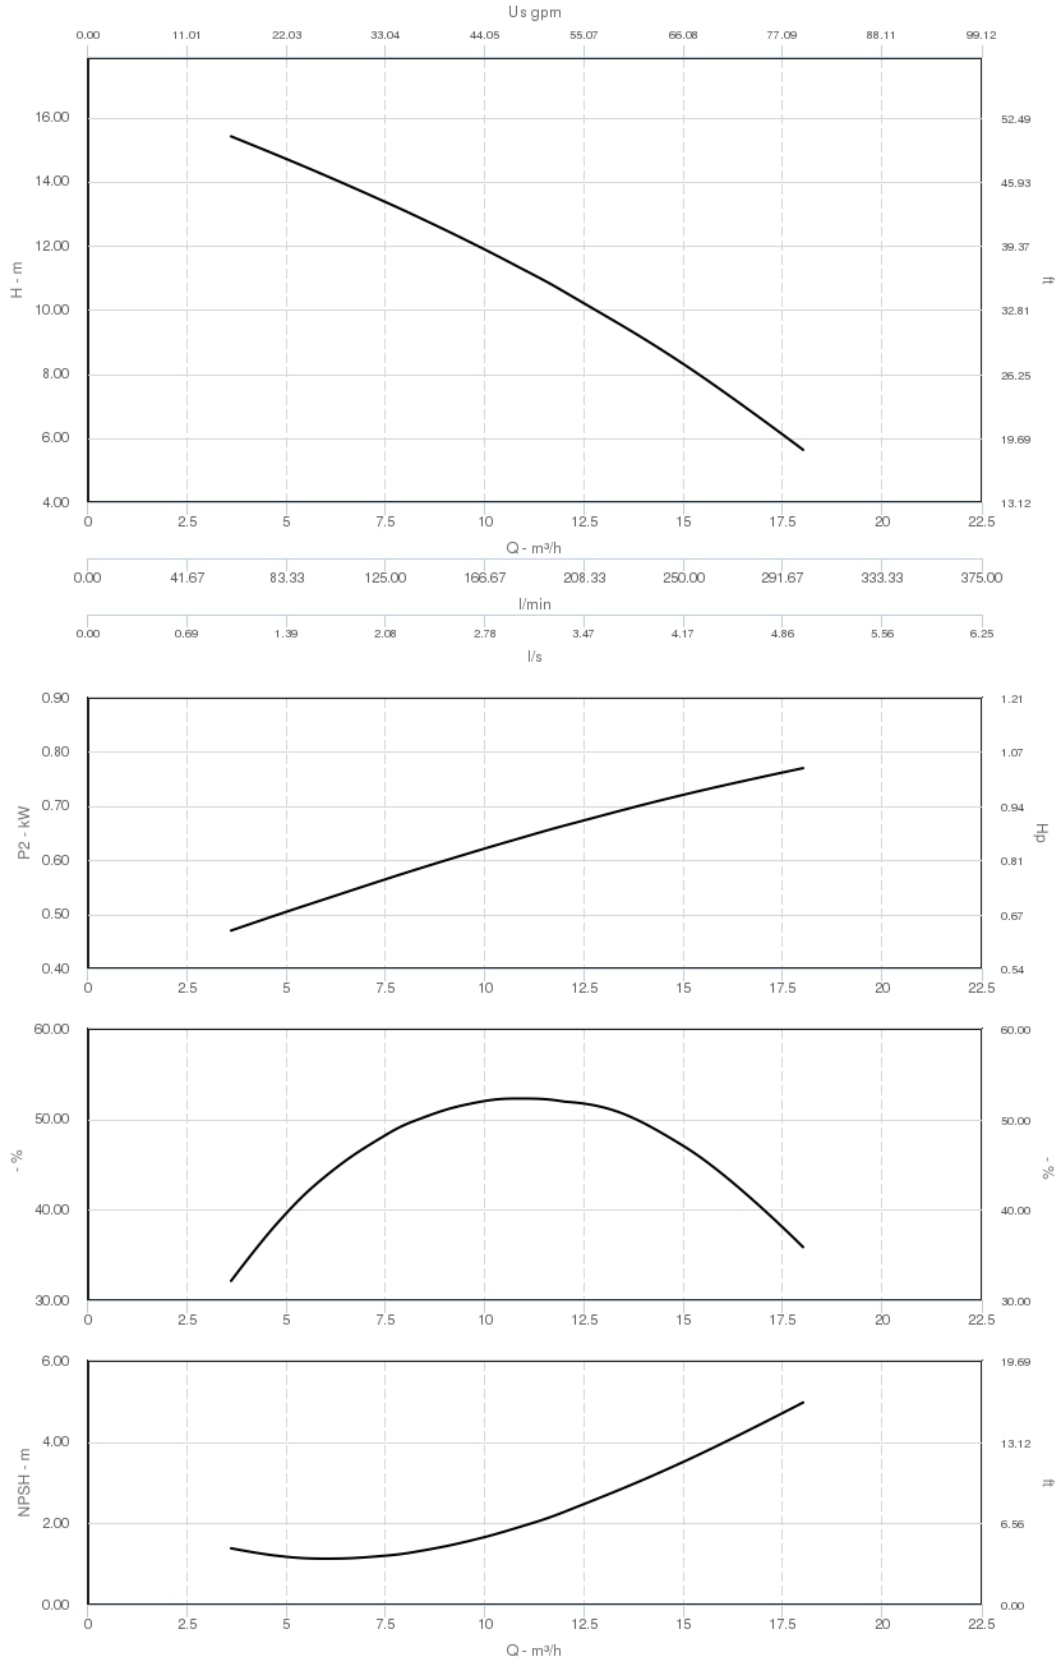

DIMENSIONS (mm)

