


Quilt Sashing's – Vertical Quilt Borders with QCT4

Ok, so we have a quilt and we don't want to rotate the quilt top to enable us to do the Vertical border. I'm going to show you another method that will allow us to do the vertical borders of the quilt without rotating it. This method is also great for using in sashing's as well.

This takes a little time in the design Layout, but it's still a lot easier than rotating a quilt. So, let's get started. We are going to design horizontally for now them simply rotate once we are happy with the design. We are going to use the continuous design method which gives us a lot of design choices. Creating Border Design

Ok select Pantograph then Basic mode

- 1. We need to measure the border let's say 8' inches.
- Next set Total Height 6'inches so we are not too close to the outer edge of the quilt or and seams. (if outer border consider area for binding)
- 3. Set Total Width to 15" (I have aQnique 21) this is within my Safe Zone.
- 4. We need to select a pattern to use in the border Something from continuous line folders or a design that you may have imported that is suitable.



5. I always like to save anything I'm working on – so save Pattern.

You may use more than 3 design repeats, this will depend on the size and design of the pattern you intend to use and what will look good on your quilt. (Purchased designs usually have a PDF with design information – recommended size & width).

Pattern 🚾	Dasic	6	914	***
Fatterns	Pattern Height	Pattern Width	10	
- 1 👕	6	0	CY	ΥY
Rows	Total Height	Total Width	h	mm
	6	15		$\vee \downarrow$



6. Once the design has been saved select Quilt As Single Pattern found in the tool bar bottom right hand side






7.Now my block has been placed on the screen ready to stitch. (Horizontal)

8.To change the orientation of the block, tap the icon

Found on the bottom right of your screen



Placement	Four Points	1
Fill Method	Stretch	
Sew Speed	Slow	0
Placed Height		1.1
Placed Width		K.X

9. This screen allows us to rotate flip, change placement options

10. Once you are happy with the changes select "Ok"

11. This message will appear on your screen select "yes".

12.Now my block has been placed on the screen ready to stitch. (Vertically)

The same	× 3 2		?ma Channell Page
	0		
	0		
Erste Pourse - Stevends More for reaching and grows the please that the base to realise a flow comes thank. The pattern will be abertified to the blood adges		Rame Din Region	Pacateet FourParts Widehold Stretch Pathen FourParts Pathen Width 15% Stock Paristich 15% Stock Paristich 15%



13. From here I have some great options so select from the tools menu at the top of the





Sewing Speed	Pattern Statist	tics	Placement Method:	Margins
The-off Bitch Count Diamondo Diamondo Diamo	Preight (n) Width Length Staches Trims	84 m 35 m	One Poet Teo Poets Bick	Pottern Dish
			Default	a Cancel OK

14. Under SETTINGS, choose a Block or Four Point placement with Stretch selected. Select Ok when finished.

Now check if the sewing direction is right, you can also change the sewing direction if you need to by select reverse icon, in the tool bar at the top of your screen.

- 15. Now we need to figure out how many times the pattern (no higher than 15") will fit into our quilt border. I usually mark these increments of the side borders before framing the quilt top so if our border is 60 inches divided this by 5 = 12". Now I can safely place the design in the desired area. Following the prompts, Stitch the quilting design to left side of the border.
- 16. Once the design has finished select
- 17. I choose to do the Left side and then the Right side of the border. Then when I have completed both sides of the borders, I can simply advance the quilt top to my next position.

 \mathbf{x}

If you choose to do block designs in the corners of the quilt, remember not to include this in your border measurements when you are trying to determine how many patterns repeats you will need.

Check Start and Stop points, I usually go to tool box



and then select move

В.	2
	Tool Box
Z	Move to Start Point
ľ	Set Safe Area
	+1 Single Stitch
6	Release Carriage
Þ	

to start point,




If I think the start point is ok - simply tap the Trace icon



Remember that some patterns will work better than others. You might try 2 pattern repeats for narrow borders – verses say 3 for something a little wider, for a denser quilting maybe

4. Always check the start point is where you need it to be, and always check the sewing start position as you may need to reverse the sewing order, from the tools menu bar at the top of your screen.

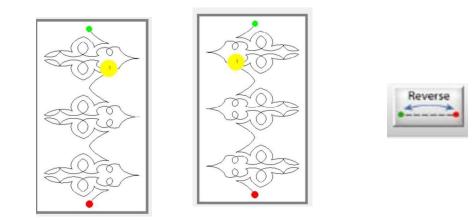

This simple and easy method also works for doing all our vertical sashing's on our quilt tops. With Sashings, try using the placement method of two points. Place the start point at top centre of the sashing and the other point at the centre bottom point of the sashing.

One Point	Two Points	Block				
*22223	, 2222a	\bigcirc				
Four Points	Multi-Point	Tilted Block				
$[\heartsuit]$	\bigcirc	Ø				
Triangle	On Point					
	\bigcirc					
Fill Method:						
Center Fit	Stretch					