
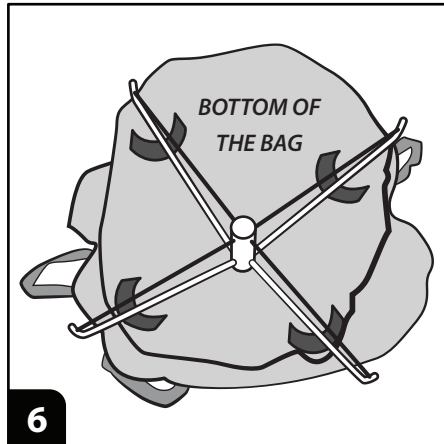
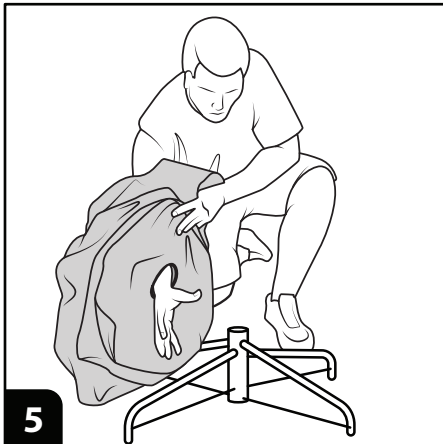


**IMPORTANT, RETAIN FOR FUTURE REFERENCE: READ CAREFULLY**  
 For assistance with assembly or installation, parts and customer service:  
[www.TreeKeeperBags.com](http://www.TreeKeeperBags.com) | [Support@VillageLighting.com](mailto:Support@VillageLighting.com)  
 Intended for indoor use

## Important Information

1. Always remember to undo all buckles and zippers on the bag before...
  - A. You pull the bag up and over your tree to store it for the season.
  - B. You pull the bag down into tree skirt position during the season.

## BAG PREPARATION INSTRUCTIONS

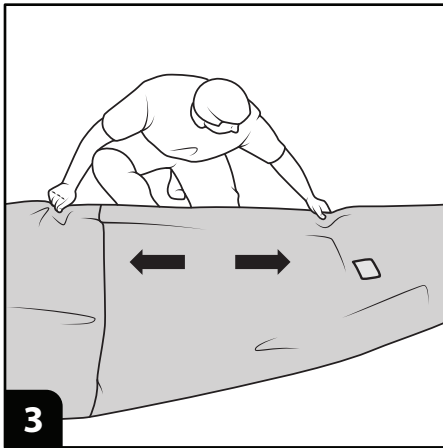

1. Locate your storage bag and remove it from the protective plastic.

2. Unfold your storage bag.



3. Lay the bag flat on the ground making sure that it is fully outstretched.

4. Grab onto the top of the storage bag with one hand and the bottom of the storage bag with the other. Slide your arm into the top portion of the bag.

5. Put your arm all the way through the bag and out the bottom tree base hole. Align the bag with your tree base and slide the bag onto it. Make sure to have your stand nearby.

6. Use the buckles to secure the bag to your tree stand.



*NOTE: For stands with only three legs attach Velcro straps onto two of the three legs.*

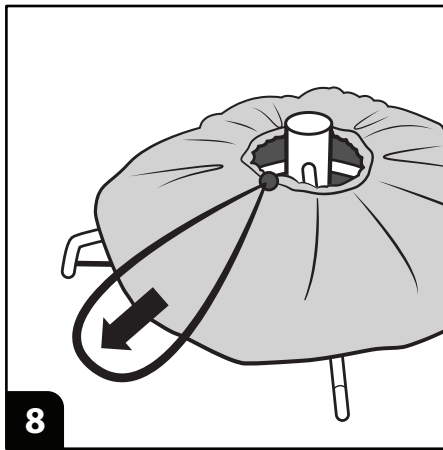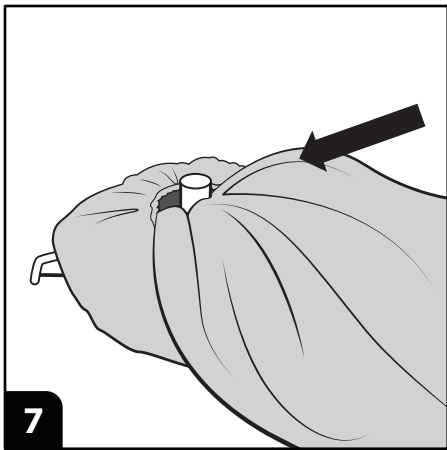

7. Arrange the fabric in an evenly distributed pile on top of the tree stand.

8. Locate the drawstring that is around the lower portion of the bag and pull tight. Arrange the excess fabric of the cover underneath the drawstring as it closes tighter around the collar of the tree stand.



9. Follow the directions from your tree manufacturer to install the tree on the tree stand.

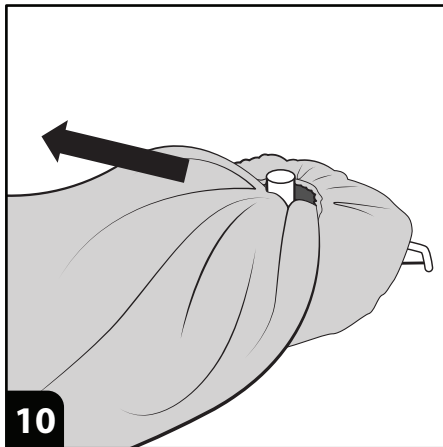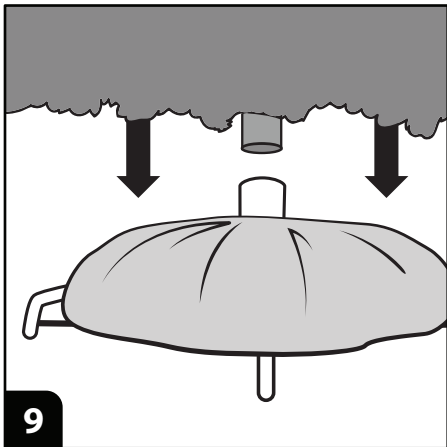

*IMPORTANT: Make sure the tree is securely fastened to the tree base. NEVER overtighten the bolts on the tree stand that secures the tree as this could damage the trunk.*

10. After the holidays are over, loosen the drawstring (mentioned in step 8) and pull the storage bag out of the tree skirt position.


11. Then fully open and expand the tree bag until all the bag's four sections are exposed and spread out on the ground.

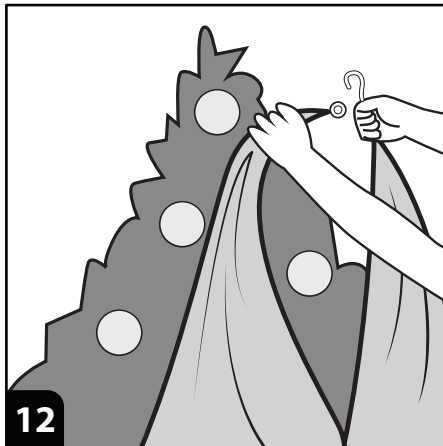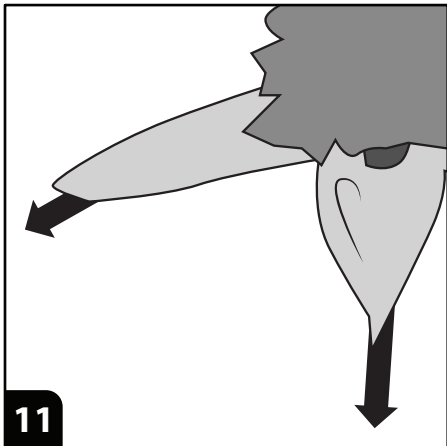

*NOTE: Be sure to also verify that all the zippers that are located at the base of each section are unzipped.*

12. On the end of one of the four sections, you will find a ring attached. Take this in one hand and then attach the hooks that are found at the other three ends. Place this assembled structure on the top of the tree.

13. With the partitions set up from the previous step, you can now simply pull up and zipper shut each section to the top.

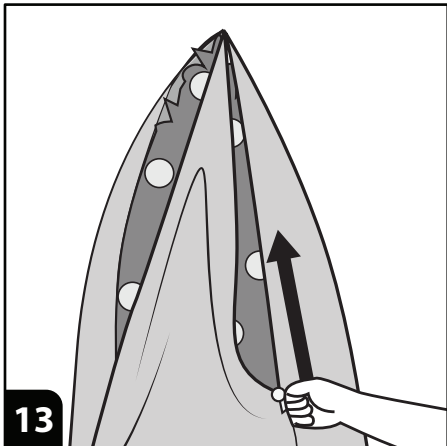

**CAUTION: DO NOT LEAN BAG ON SIDE AND PULL ALL THE WEIGHT OF THE TREE ON ONE OR TWO LEGS. THIS WILL DAMAGE YOUR TREE STAND AND TREE.**

*Always use two people and use caution when leaning the tree over. Do not put too much pressure on the stand while tipped as this could result in damaging the trunk of the tree. Use caution when lifting the tree as it may be heavy. Use extreme caution when moving the tree up or down stairs. Whenever possible, use two or three people to store your tree.*

# 29" ROLLING TREE STAND

MODEL #: TK-10259

**IMPORTANT, RETAIN FOR FUTURE REFERENCE: READ CAREFULLY**  
 For assistance with assembly or installation, parts and customer service:  
[www.TreeKeeperBags.com](http://www.TreeKeeperBags.com) | [Support@VillageLighting.com](mailto:Support@VillageLighting.com)  
 Intended for indoor use

Please lay out all parts prior to assembly or installation.

## IMPORTANT: WHICH TRUNK DO YOU HAVE?

<b>A</b>  1x	<b>B</b>  1x	<b>C</b>  4x	 <b>FLAT TRUNK</b>	
<b>D</b>  3x	<b>E</b>  4x	<b>F</b>  4x	<b>G</b>  1x	 <b>POINTED TRUNK</b>
<b>H</b>  1x	<b>I</b>  1x	<p><b>Before you begin, note the bottom of your tree trunk.</b>          If you have a pointed trunk, proceed to step one in the assembly instructions and <b>DO NOT</b> install the cup (G).</p> <p>For trees with a flat-bottomed trunk, there is one additional step to ensure your tree's stability involving the cup (G). Simply rest the cup (G) in the hole on the bottom of the base collar (B). If you have already performed steps four and five, just remove the inner collar and insert the cup (G).</p> <p>Then insert the inner collar (A), which will rest on top of the cup (G). Proceed onto step four as normal.</p>		

## ASSEMBLY INSTRUCTIONS

<b>1</b>  <b>x4</b>	<b>2</b>  <b>x4</b>		
<b>3</b> 	<b>4</b> 	<b>5</b> 	<b>6</b> 