


PROJECT FLOORS

WHY CHOOSE STONE PLANK COMPOSITE

TruTouch SPC

TruTouch SPC is the next generation in hard flooring offering a realistic timber finish manufactured using 60% limestone composite with an integrated acoustic backing. A very dense, durable product with a commercially rated wear layer.

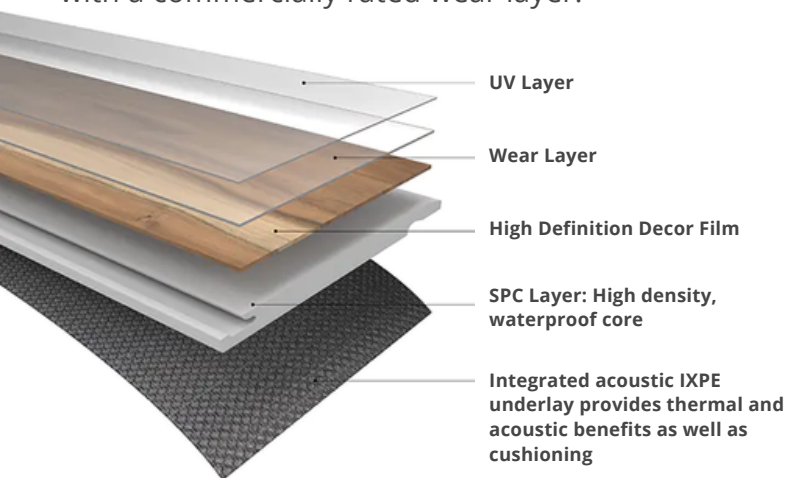

SPC 01




SPC 02




SPC 03



SPC 04



SPC 04B




SPC 05



SPC 06



SPC 07




SPC 11

- ✓ **Integrated acoustic backing** offers a 23dB reduction towards the 55dB as required under the NZ building code. No need to use a secondary underlay.
- ✓ **Environmentally friendly.** SPC flooring materials use environmentally friendly formulations and do not contain harmful substances such as heavy metals, phthalates, methanol, etc., in accordance with EN14372, EN649-2011, IEC62321, GB4085-83 standards.
- ✓ **100% water-resistant.** Compliant with Building Code clause E3. Permanently waterproof. Ideal for use in kitchens, bathrooms, laundries, anywhere. No deformation, warping, foaming, corrosion when in contact with liquid
- ✓ **Super wear-resistant.** Mildew and moisture proof, no fading even under high humidity. B1 fireproof. Thicker than LVT resulting in improved comfort and insulation. Perfect in high traffic areas.
- ✓ **Simple installation.** Easy to lay thanks to patented Unilin Generation 5 interlocking system, uniclic, which is combined with an epoxy adhesive. Can be installed over existing flooring providing it is stable and has a smooth U3 finish.
- ✓ **Classic and timeless designs.** Currently, we have 9 designs in stock and over 400 custom designs available.




ACOUSTICS

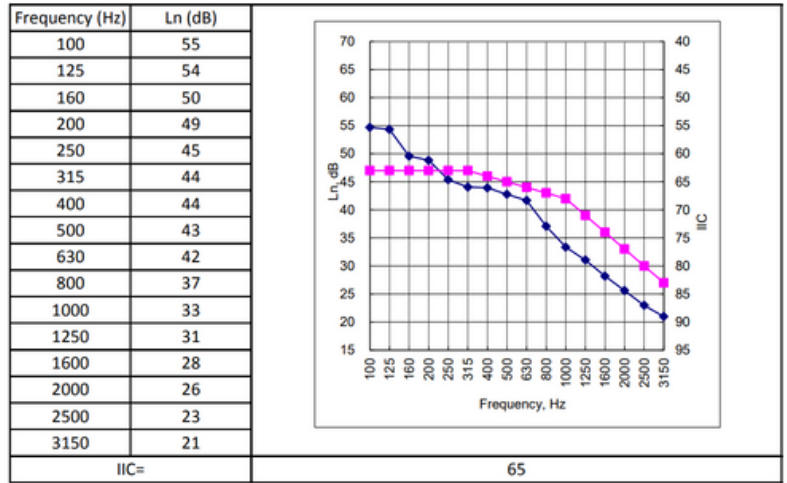

UNICLIC INSTALLATION

- best technical performance among all locking systems
- easy and flexible production
- quick, easy, and clean installation
- no height difference + a seamless joint
- ensured long-lasting stability

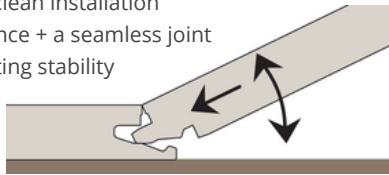

TruTouch SPC can be installed directly over hard flooring, provided that the existing floor is stable and has a smooth U3 finish. It is important to note that TruTouch SPC requires a 1mm expansion gap for every 1 linear meter of flooring to accommodate for any changes in temperature or humidity.

BENEFITS

Extreme Stability

Combined with PVC resin and Calcium Oxide, extruded under high temperature and high pressure, the SPC rigid flooring has extreme stability of dimensional expansion and has outstanding structure memory.

Super Water Resistant


The rigid SPC composite material is a water proof material, the floor core board brings a very low thickness swelling, without the worry of damage or staining from water and moisture and counteracts the accidents that can happen in our busy lives.

Abrasion resistance

With fortifier in top UV coating and wear layer with the special technology, The surface abrasion coefficient is more than regular wear layer which brings TruTouch SPC rigid floor a longer life time under the right condition of use and maintenance.

Ease of Installation

International patent click locking system makes floor installation simple and convenient. Easy to work and quick to lay, lends itself perfectly to both DIY and professional installation.

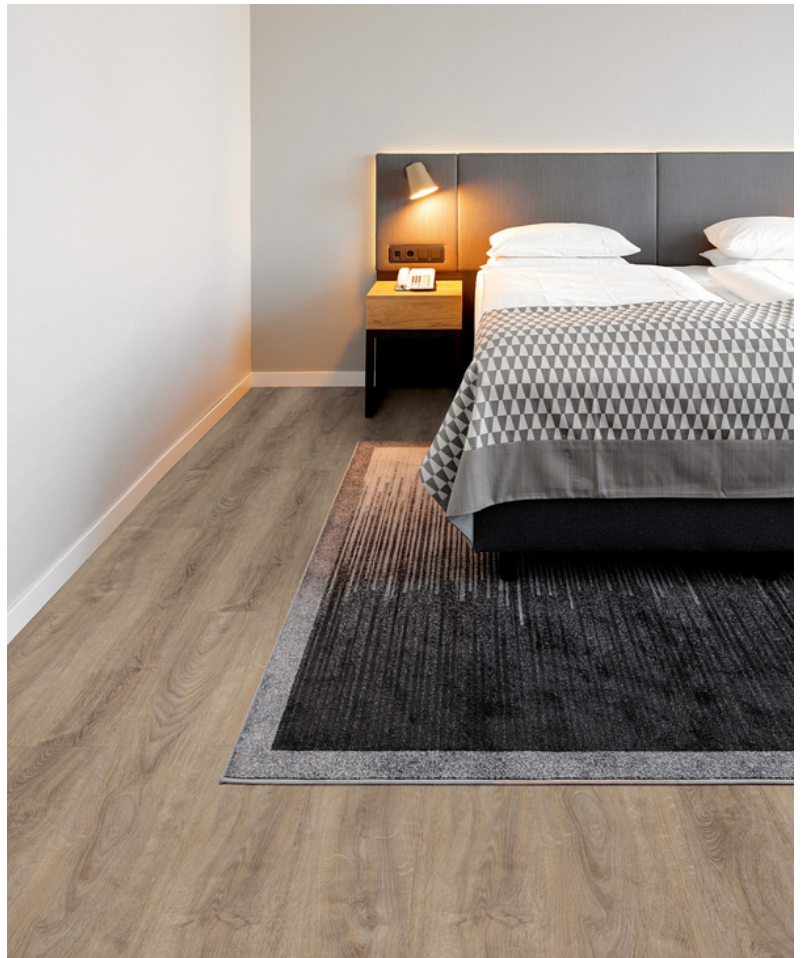

THERMAL CONDUCTIVITY + RESISTANCE

EN 14041:2004/AC:2006					
Thickness	Mean Temperature	Temperature Difference	Thermal Conductivity	Thermal Resistance	Verdict
8.4mm	23°C	10°C	0.110 W/(m·K)	0.076 (m ·K)/W	Pass



AUCKLAND DESIGN HUB: 55A Barrys Point Road, Takapuna, Auckland, 0622

CHRISTCHURCH DESIGN HUB: 41 Welles Street, Christchurch Central, 8011

WAREHOUSE: 24A Fremlin Place, Avondale, 1026

www.projectfloors.co.nz

09 444 4165

salesoffice@projectfloors.co.nz