

HGX44e/475-4

Engine: 380-420V Y/YY -3- 50Hz PW

Refrigerant: R134a

Subject:

Performance data

Refrigerant	R134a	Compressor refrigeration capacity	22.30 kW
Reference temperature	Dew point	Evaporator refrigeration capacity	22.30 kW
Frequency and voltage	50 Hz / 400 V	Power consumption	6.61 kW
Evaporating temperature	5.0 °C	Current draw (400 V)	12.40 A
Evaporating pressure (abs.)	3.50 bar	Coefficient of performance (COP/EER)	3.37
Condensing temperature	50.0 °C	Condensing capacity	28.90 kW
Condensing pressure (abs.)	13.17 bar	Mass flow	0.156 kg/s
Suction gas temperature	20 °C	Discharge end temperature	78.7 °C ²⁾
Subcooling (outside cond.)	0 K		
Usable superheat	100%		

Preliminary capacity data.

- 1) Selection and operation of compressors with external frequency inverter (third-party product):
For the released frequency range of the Bock compressor, see technical data or at min./max. cooling capacity.
The maximum permissible working current of the compressor ($I_{max,comp}$) (see technical data) must not be exceeded. If abnormal vibrations occur in the system, the affected frequency ranges has to be blanked out in the frequency converter accordingly.
The maximum output current of the frequency converter must be greater than $I_{max,comp}$. For a safe start of the compressor, the frequency converter, for applications with low pressure refrigerants HP up to 28 bar, must be able to supply a short-term overload of min. 140% of $I_{max,comp}$ for min. 3 seconds. For applications with high pressure refrigerants (e.g. CO₂) a value of min. 160% of $I_{max,comp}$ for min. 3 sec has to be supplied.
Carry out all designs and installations in accordance with local safety regulations and common regulations (e.g. VDE), as well as the specifications of the frequency inverter manufacturer.

Notes regarding capacity data:

When compressor is operated with frequency inverter the capacity data is calculated out of the 50Hz-data and is intended as an assistance to determine the capacity data at different frequencies. Deviations cannot be excluded.

- 2) The stated value of the discharge end temperature is a mere calculated value. Additional cooling and heat dissipation are not considered. Deviations (particularly in deep freezing applications) from the real measured discharge temperature during operation are possible.

Subject to change without notice

To:

From:

21.04.2022
Page 1 of 11

VAP 11.10.0 (online)


HGX44e/475-4



Engine: 380-420V Y/YY -3- 50Hz PW

Refrigerant: R134a

Subject:

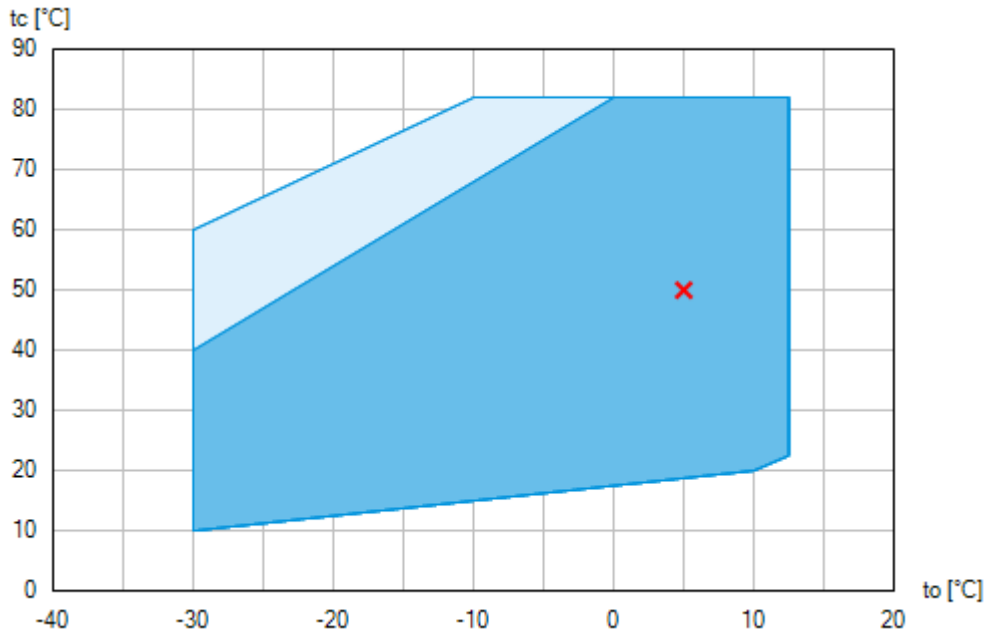Operating limits



-  Unlimited application range
-  Supplementary cooling or reduced suction gas temperature ($\Delta t_{oh} < 20K$)

Compressor operation is possible within the limits shown on the diagrams of application. Please note the coloured areas. Compressor application limits should not be chosen for design purposes or continuous operation. Axis values refer to dew point (saturated vapour line).

HGX44e/475-4

Engine: 380-420V Y/YY -3- 50Hz PW

Refrigerant: R134a

Subject:

Technical data

Number of cylinders / Bore / Stroke	4 / 55 mm / 50 mm
Displacement 50/60 Hz (1450/1740 1/min)	41,30 / 49,60 m ³ /h
Voltage ¹⁾	380-420V Y/YY -3- 50Hz PW
	440-480V Y/YY -3- 60Hz PW
Winding divided into	50% / 50%
Max. working current ²⁾	19.0 A
Max. power consumption ²⁾	11.0 kW
Starting current (rotor blocked) ²⁾	65.0 / 109.0 A
Motor protection	INT69 G
Protection terminal box	IP 66
Weight	165 kg
Frequency range ³⁾	25 - 70 Hz
Max. permissible overpressure (g) (LP/HP) ⁴⁾	19 / 28 bar
Connection suction line SV	35 mm - 1 3/8 "
Connection discharge line DV	28 mm - 1 1/8 "
Lubrication	Oil pump
Oil type R134a, R404A, R407A/C/F, R448A, R449A, R450A, R513A	BOCKlub E55
Oil type R22	BOCKlub A46
Oil charge	2,7 Ltr.
Oil sump heater	230 V - 1 - 50/60 Hz, 160 W
Dimensions Length / Width / Height	649 / 361 / 383 mm
Sound power level L _{WA} ⁵⁾	77 db(A) @ -35/+40 °C
	76 db(A) @ -10/+45 °C
Sound pressure level L _{pA} ⁵⁾	64 db(A) @ -35/+40 °C
	63 db(A) @ -10/+45 °C

1) Tolerance ($\pm 10\%$) relates to the mean value of the voltage range. Other voltages and current types on request

All data are based on voltage rms values

PW = part winding, motors for part winding starting
(no start unloaders required)
Designs for Y/D on request

Subject to change without notice

To:

From:

21.04.2022
Page 3 of 11

VAP 11.10.0 (online)

HGX44e/475-4

Engine: 380-420V Y/YY -3- 50Hz PW

Refrigerant: R134a

Subject:

- 2) - The stated value for the max. power consumption is valid for the adjusted power supply.
 - Starting current (rotor blocked):
 - Part winding (PW) motors: Winding 1 / Winding 1+2
 - Delta/Star (Δ/Y) motors: Δ / Y
 - Take account of the max. operating current / max. power consumption for designing motor contractors, feed lines, fuses and motor protection switches. Motor contractors: Consumption category AC3.
- 3) The maximum permissible working current of the compressor (I_{max}) must not be exceeded. Take account of the guidelines for use of frequency inverter (see compressor assembly instruction or selection software).
- 4) LP = Low pressure
HP = High pressure
- 5) Declared dual-number noise emission values are in accordance with ISO 4871. The corresponding uncertainty to the sound power level is $K_{WA} = 2,5$ dB and to the sound pressure level is $K_{pA} = 2,5$ dB. The values are valid for 50 Hz with the refrigerant R404A at the standard rating points according to EN 12900.
 - A-weighted sound power level L_{WA} (re 1 pW), in decibel. To determine the values, measurement methods of the ISO 3740 standard with accuracy class 2 or higher were used .
 - A-weighted sound pressure level L_{pA} (re 20 μ Pa), in decibel. The values are calculated from the sound power level in accordance with ISO 11203: $L_{pA} = L_{WA} - Q_2$ at a distance of $d = 1$ m to the reference box.

Subject to change without notice

To:

From:

21.04.2022
Page 4 of 11

VAP 11.10.0 (online)

HGX44e/475-4

Engine: 380-420V Y/YY -3- 50Hz PW

Refrigerant: R134a

Subject:

Performance data table

Application: Refrigeration & AC

Reference temperature: Dew point

Compressor frequency: 50 Hz ¹⁾

Voltage: 400 V

Suction gas temperature: 20 °C

Subcooling (outside cond.): 0 K

tc [°C]		to [°C]								
		10.0	5.0	0.0	-5.0	-10.0	-15.0	-20.0	-25.0	-30.0
30.0	Q [W]	35700	29500	24100	19400	15400	12100	9190	6850	4920
	P [kW]	4.75	4.74	4.62	4.41	4.13	3.79	3.42	3.03	2.63
	I [A]	10.20	10.20	9.99	9.76	9.46	9.11	8.73	8.34	7.97
35.0	Q [W]	33600	27700	22600	18200	14400	11200	8490	6260	4400
	P [kW]	5.33	5.23	5.03	4.75	4.40	4.00	3.57	3.12	2.68
	I [A]	10.80	10.70	10.50	10.20	9.75	9.33	8.88	8.44	8.02
40.0	Q [W]	31400	25900	21100	16900	13400	10400	7790	5670	3890
	P [kW]	5.90	5.71	5.43	5.07	4.65	4.19	3.70	3.20	2.72
	I [A]	11.50	11.30	11.00	10.50	10.10	9.53	9.02	8.52	8.05
45.0	Q [W]	29300	24100	19600	15700	12400	9490	7110	5100	3390
	P [kW]	6.45	6.17	5.81	5.37	4.88	4.35	3.81	3.26	2.72
	I [A]	12.20	11.80	11.40	10.90	10.30	9.70	9.13	8.57	8.06
50.0	Q [W]	27200	22300	18100	14400	11300	8660	6430	4520	2880
	P [kW]	6.97	6.61	6.16	5.64	5.08	4.49	3.88	3.27	2.69
	I [A]	12.80	12.40	11.80	11.20	10.60	9.85	9.20	8.59	8.03
55.0	Q [W]	25100	20500	16600	13200	10300	7830	5740	3940	2360
	P [kW]	7.46	7.01	6.47	5.88	5.24	4.58	3.91	3.25	2.62
	I [A]	13.50	12.90	12.20	11.50	10.70	9.95	9.23	8.56	7.96
60.0	Q [W]	23000	18800	15100	12000	9280	7000	5040	3340	1840
	P [kW]	7.91	7.36	6.74	6.06	5.35	4.62	3.89	3.17	2.49
	I [A]	14.10	13.40	12.60	11.70	10.90	9.99	9.21	8.49	7.84
65.0	Q [W]	20900	17000	13600	10800	8250	6150	4330	2730	
	P [kW]	8.31	7.66	6.95	6.19	5.41	4.60	3.81	3.03	
	I [A]	14.60	13.80	12.80	11.90	10.90	9.98	9.13	8.35	
70.0	Q [W]	18800	15200	12100	9450	7210	5280	3600		
	P [kW]	8.65	7.90	7.10	6.26	5.40	4.52	3.66		
	I [A]	15.10	14.10	13.00	12.00	10.90	9.89	8.97		

Preliminary capacity data.

Supplementary cooling or reduced suction gas temperature ($\Delta t_{oh} < 20K$)

to Evaporating temperature
tc Condensing temperature
Q Compressor refrigeration capacity
P Power consumption
I Current draw

Subject to change without notice

To:

From:

21.04.2022
Page 5 of 11

VAP 11.10.0 (online)

HGX44e/475-4

Engine: 380-420V Y/YY -3- 50Hz PW

Refrigerant: R134a

Subject:

- 1) Selection and operation of compressors with external frequency inverter (third-party product):
For the released frequency range of the Bock compressor, see technical data or at min./max. cooling capacity.
The maximum permissible working current of the compressor ($I_{max,comp}$) (see technical data) must not be exceeded. If abnormal vibrations occur in the system, the affected frequency ranges has to be blanked out in the frequency converter accordingly.
The maximum output current of the frequency converter must be greater than $I_{max,comp}$. For a safe start of the compressor, the frequency converter, for applications with low pressure refrigerants HP up to 28 bar, must be able to supply a short-term overload of min. 140% of $I_{max,comp}$ for min. 3 seconds. For applications with high pressure refrigerants (e.g. CO₂) a value of min. 160% of $I_{max,comp}$ for min. 3 sec has to be supplied.
Carry out all designs and installations in accordance with local safety regulations and common regulations (e.g. VDE), as well as the specifications of the frequency inverter manufacturer.

Notes regarding capacity data:

When compressor is operated with frequency inverter the capacity data is calculated out of the 50Hz-data and is intended as an assistance to determine the capacity data at different frequencies. Deviations cannot be excluded.

Subject to change without notice

To:

From:

21.04.2022
Page 6 of 11

VAP 11.10.0 (online)

HGX44e/475-4

Engine: 380-420V Y/YY -3- 50Hz PW

Refrigerant: R134a

Subject:

Scope of supply

Semi-hermetic four-cylinder reciprocating compressor with drive motor
Single-section compressor housing with hermetically integrated electric motor

Winding protection with PTC resistor sensors and electronic trigger unit INT69 G
115-230 V AC, 50/60 Hz, IP00

Rear bearing flange prepared for oil differential pressure sensor DELTA-P II

Oil pump

Possibility of connection of oil level controllers ESK, AC+R or CARLY

Possibility of connection of oil level controllers Traxoil ¹⁾

Possibility for connection of oil pressure safety switch MP54

Oil charge:

HG: **BOCK**lub A46

HGX: **BOCK**lub E55

Sight glass

Pressure relief valve

Suction and discharge line valve

Inert gas charge

4 anti-vibration pads enclosed

Accessories

Start unloader by means of a ESS (Electronic Soft Start), 400 V - 3 - 50/60 Hz, IP20 (Connection clamps IP00) for installation in switch cabinet ²⁾

(Digital) capacity regulator DCR14 230 V - 1 - 50/60 Hz, IP65
possible equipment see 09900-DGbF Capacity regulator 09900-DGbF

Cylinder cover prepared for digital capacity regulator

Oil sump heater 230 V - 1 - 50/60 Hz, 160 W

Intermediate flange for discharge line valve on right or left seen from oil pump

Oil differential pressure sensor DELTA-P II 220-240 V - 1 - 50/60 Hz ³⁾

Connection piece suction and discharge valve in welding design

Thermal protection thermostat per cylinder cover

Oil pressure safety switch MP54 230 V - 1 - 50/60 Hz, IP20 ²⁾

USB converter for INT69 G Diagnose ²⁾

Subject to change without notice

To:

From:

21.04.2022
Page 7 of 11

VAP 11.10.0 (online)

HGX44e/475-4

Engine: 380-420V Y/YY -3- 50Hz PW

Refrigerant: R134a

Subject:

Oil temperature sensor (Pt1000, for external evaluation) ²⁾

INT69 G Diagnose 115-230 V AC, 50/60 Hz, IP00 (INT69 G not applicable)

DP-Modbus Gateway 115-230 V AC, 50/60 Hz, IP00 including adapter cable ²⁾

Modbus-LAN Gateway 230 V AC, 50/60 Hz, IP00 ²⁾

Additional fan

230 V AC - 1 - 50 Hz, 97 W, IP44

230 V AC - 1 - 60 Hz, 128 W ²⁾

Step protection

Special voltage and/or frequency (on request)

- 1) Only with additional adapter possible
- 2) Enclosure
- 3) Enclosure (screw-in part mounted)


HGX44e/475-4

Engine: 380-420V Y/YY -3- 50Hz PW

Refrigerant: R134a

Subject:

Dimensions and connections

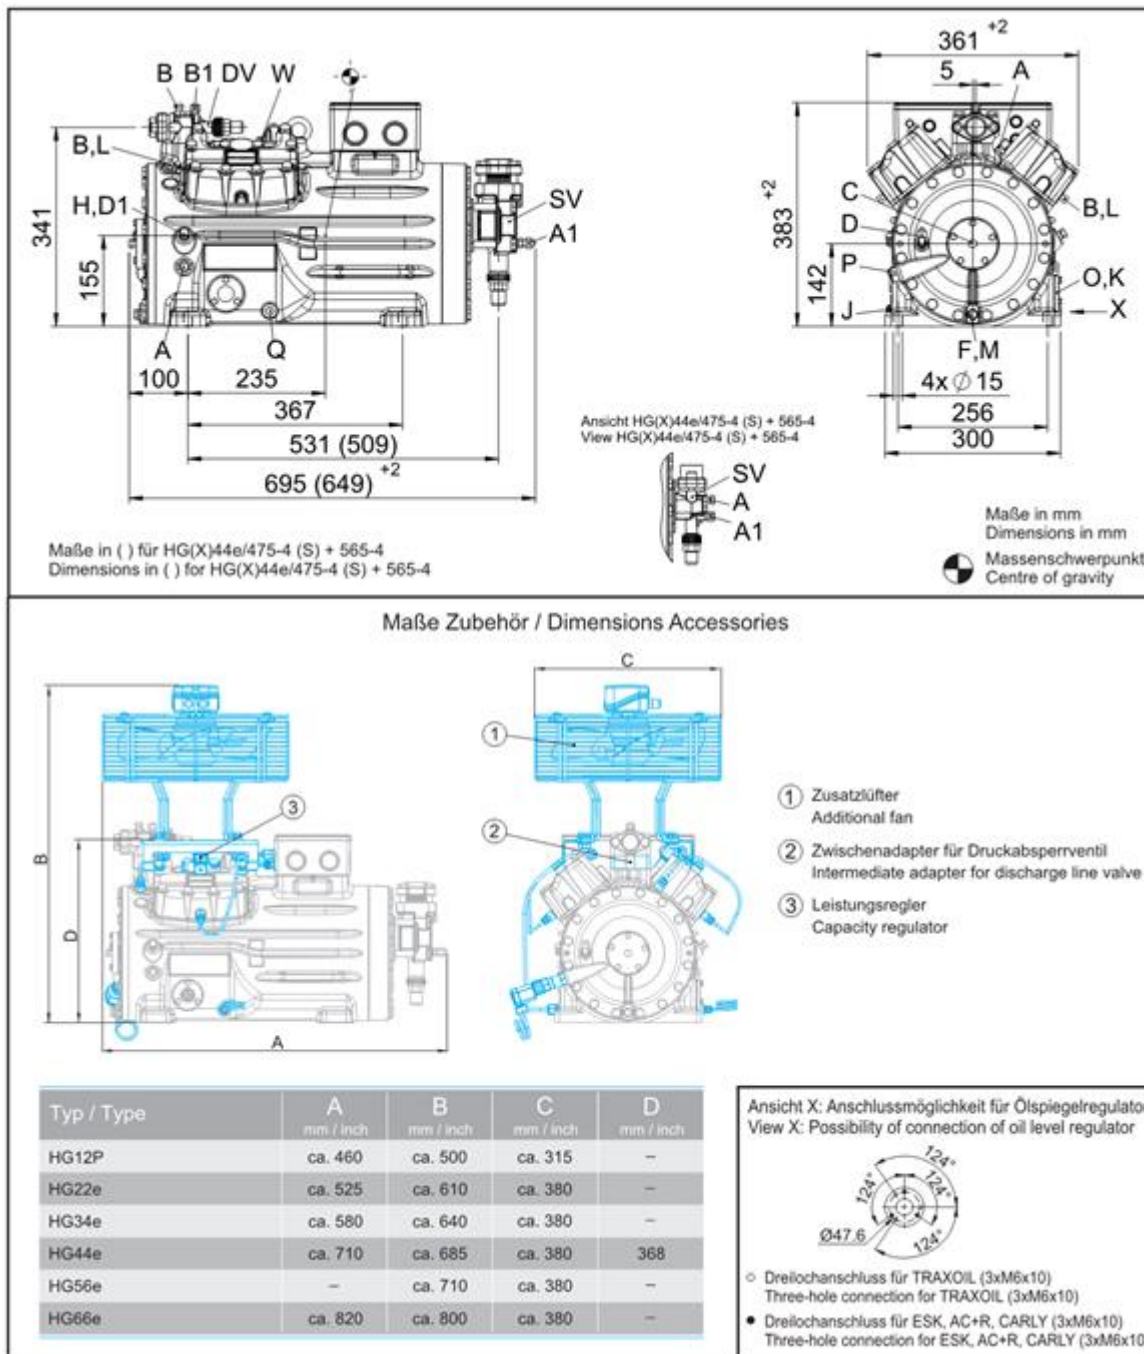

Subject to change without notice

To:

From:

21.04.2022
Page 9 of 11

VAP 11.10.0 (online)

HGX44e/475-4

Engine: 380-420V Y/YY -3- 50Hz PW

Refrigerant: R134a

Subject:

SV	Suction line valve, tube \varnothing ¹⁾	35 mm - 1 3/8 "
DV	Discharge line valve, tube \varnothing ¹⁾	28 mm - 1 1/8 "
A	Connection suction side, not lockable	1/8 " NPTF
A1	Connection suction side, lockable	7/16 " UNF
B	Connection discharge side, not lockable	1/8 " NPTF
B1	Connection discharge side, lockable	7/16 " UNF
C	Connection oil pressure safety switch OIL	1/8 " NPTF
D	Connection oil pressure safety switch LP	7/16 " UNF
D1	Connection oil return from oil separator	1/4 " NPTF
F	Oil drain	M 12 x 1.5
H	Oil charge plug	1/4 " NPTF
J	Connection oil sump heater	3/8 " NPTF
K	Sight glass	3 x M 6
L	Connection thermal protection thermostat	1/8 " NPTF
M	Oil strainer	M 12 x 1.5
O	Connection oil level regulator	3 x M 6
P	Connection oil differential pressure sensor	M 20 x 1.5
Q	Connection oil temperature sensor	1/8" NPTF
W	Connection for refrigerant injection	1/8" NPTF

1) Brazing connection

Subject to change without notice

To:

From:

21.04.2022
Page 10 of 11

VAP 11.10.0 (online)

HGX44e/475-4

Engine: 380-420V Y/YY -3- 50Hz PW

Refrigerant: R134a

Subject:

Product photo



Subject to change without notice

To:

From:

21.04.2022
Page 11 of 11

VAP 11.10.0 (online)