

## HELIDECK LANDING NET // 15x15m square

### PRODUCT NAME

Frictape Landing Deck Net

### PRODUCT NO.

7003-104

### APPLICATION

To be used on helideck to create friction between helicopter wheels and deck surface.

### TYPE APPROVALS

DNV S-7903  
ABS 13-LD1012205A-PDA

### NET PROPERTIES

- >> Anti-skid material and anti-skid mesh structure
- >> Mesh size 20x20 cm
- >> Net height from surface less than 2 cm when stepped on
- >> Electrostatically safe, non-flammable

### COMPLY WITH:

- >> CAP 437 (February 2013)
- >> ICAO Heliport manual, Third Edition, 9261-AN/903
- >> NORMAM01/DPC Capitulo 6
- >> DNV-OS-E401 Helicopter decks
- >> ABS Rules for Mobile Offshore Drilling Units 2012 Part 5
- >> USCG 46 CFR, Part 108.235

### MATERIAL PROPERTIES

- >> Weather resistant UV-protected polyester and jute yarn tape construction
- >> Material 2-layer woven lightweight tape of:
  - > Tape dimensions: 38 x 5 mm (width/thickness)
  - > Weight: 80 g/m
  - > Tensile strength: 20 kN

### MEASUREMENTS



- >> Frictape Tiedown tapes, 44 pcs

#### Dry weights:

- >> Textile parts (net + 7 m tiedowns + carrying bag): 250 kg
- >> Gross with packing included: 300 kg
- >> Optional ratchet assemblies add weight to gross 50 kg
- >> Shipment on 100x120x116 cm plywood pallet, ISPM 15 certified

#### One Unit consists of:

- >> Actual net
- >> 44 pcs of Frictape compatible 7 m long, 3 ton/35 mm wide tiedown tapes readily attached to the net perimeter as indicated in drawing
- >> Documentation included:
  - > DNV S-7903 Type Approval Certificate
  - > ABS 13-LD1012205A-PDA Type Approval Certificate
  - > Handbook in English
  - > Delivery Technical Certificate
  - > Certificate of origin and other additional materials on request against possible additional cost.
- >> Packed into a textile carrying bag with carrying loops
- >> Fastening ratchets are delivered as options if ordered

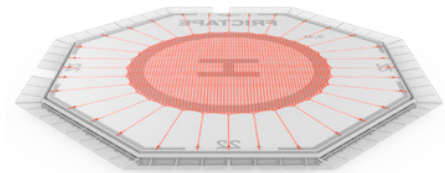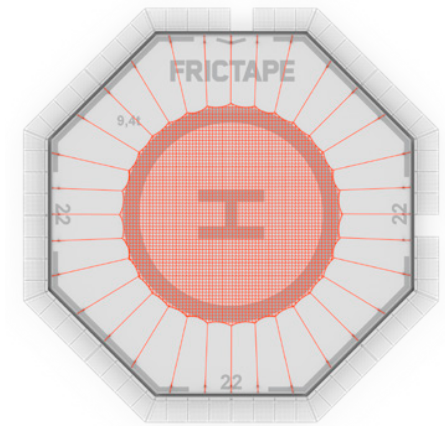

### LIMITATIONS

- >> Use as directed by local aviation authorities
- >> Visual inspections on the net and attachments before use

### AGE

- >> 5 years from date of installation unless the rejection criteria (below) is met before

### REJECTION CRITERIA

- >> When visually broken (cuts, breaks etc.) or
- >> Approximately 10 % of the black polyester material is visually worn

### REJECTION METHOD

- >> Markings on the net to be removed and the net to be discarded



# FRICTAPE

## HELIDECK LANDING NET // Accessories

### WRENCH

Wrench operated stainless steel ratchet with 2T hot dip galvanized shackle

Product no. 7005-103 SS



### WRENCH

Wrench operated ratchet with 1T hook, both Stainless steel

Product no. 7005-105 SS



### HANDLE

Handle operated stainless steel ratchet with 2T hot dip galvanized shackle

Product no. 7005-104 SS



### HANDLE

Handle operated ratchet with 1T hook, both Stainless steel

Product no. 7005-106 SS



### FRICTAPE TIEDOWN TAPES

Are attached to Frictape landing net with a lasso loop at 1,5m intervals. Standard length supplied with the net is 7 m ' (Product no 7005-101) including sewn loop at other end.

Other options available on request:

For example longer 9 m option (Product no 7005-102).



### PACKING

Ratchet assemblies are packed in carrying bag(s) depending on ordered numbers. Wrench operated ratchets include also 28mm wrench for tensioning.




### DELIVERY

Delivery in a plywood pallet if ordered individually.

When delivered with a Frictape Landing Net only bags are used.



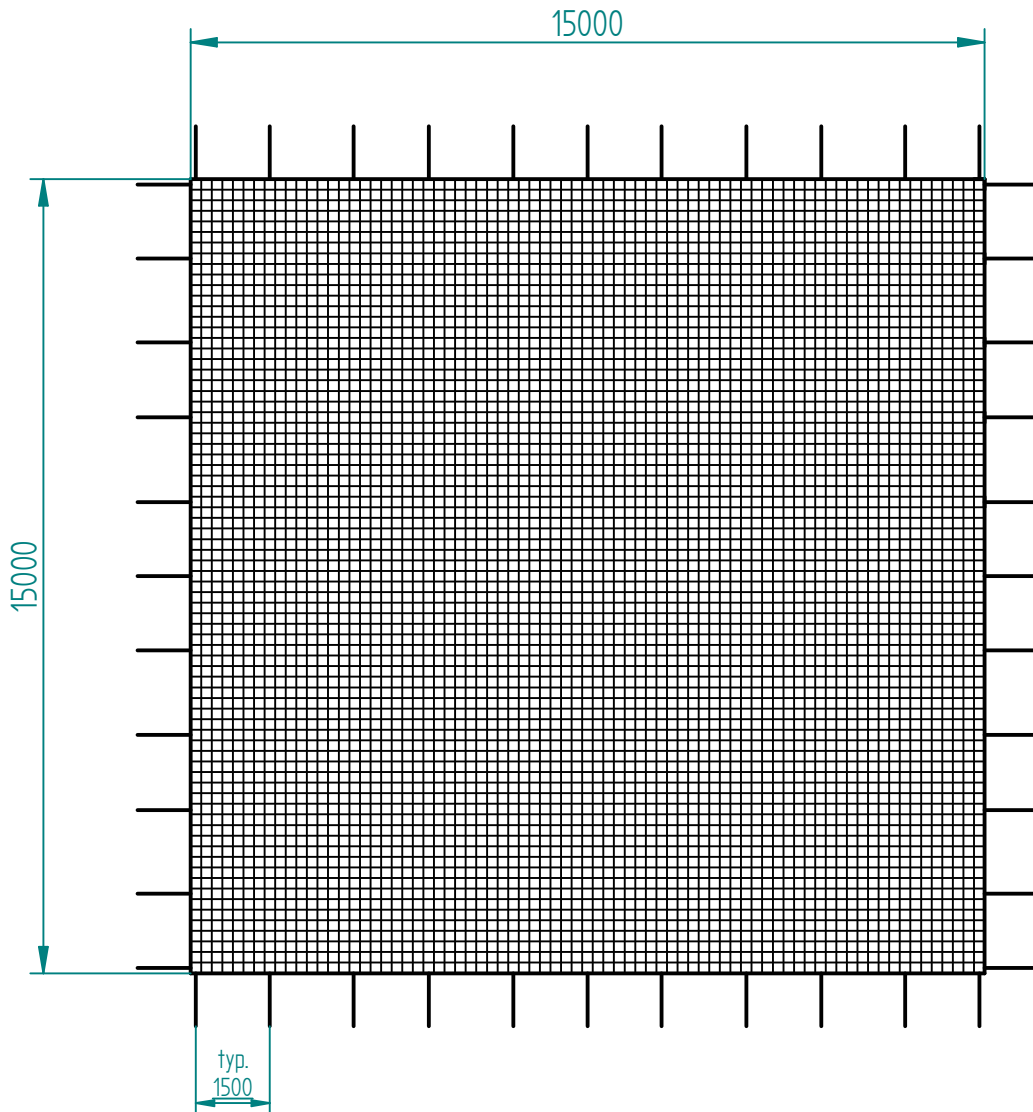

TITLE

15m x 15m Square Landing Net

[WWW.FRICTAPE.COM](http://WWW.FRICTAPE.COM)

DWG NO

7003-104

ALL RIGHTS RESERVED