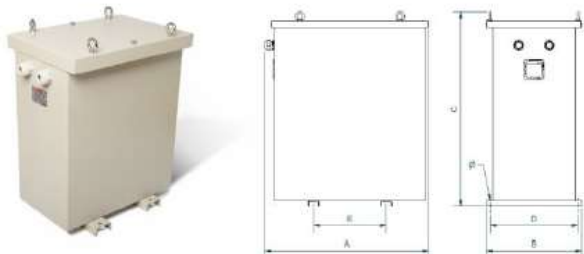


Data Sheet

Single Phase Isolating Transformer

Model TKS1013X0355

Technical Characteristics

Rating	6.5kVA
Input voltage	400V
Output voltage	230V
Frequency	50/60 Hz
Protection degree	IP-65
Cover	Metal enclosure RAL 7035 (cat. C4 ISO 12994-2)
Cooling	ANAN
Ambient temperature	40°C
Temperature rise	Class F
Insulation	Class F - 155°C
Windings	Class HC - 220°C
Test voltage	3 kV (1 min, 50 Hz)
Standards	IEC/EN/UNE-EN 61558, CE
Representative picture of the product	

Item	Reference*	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	ø (mm)	Weight (kg)
1	TKS1013X0355	738	417	760	370	350	110	110

Remark: The dimensions stated at this quotation are approximated and can be modified without previous notification.
Polylux does not accept returns of custom-made products once delivered or cancellation once manufactured.