


CONNECTIONS

- Discharge: 1"
- Inlet: 2"
- Vent: 1-1/4"

PRODUCT FEATURES

- A simplex drain pump used for a variety of fixtures in commercial and industrial applications.
- Able to discharge the waste up to 25 feet vertical and/or 250 feet horizontal.
- Capable of handling aggressive and hot water up to 194 F.

PUMP CURVE

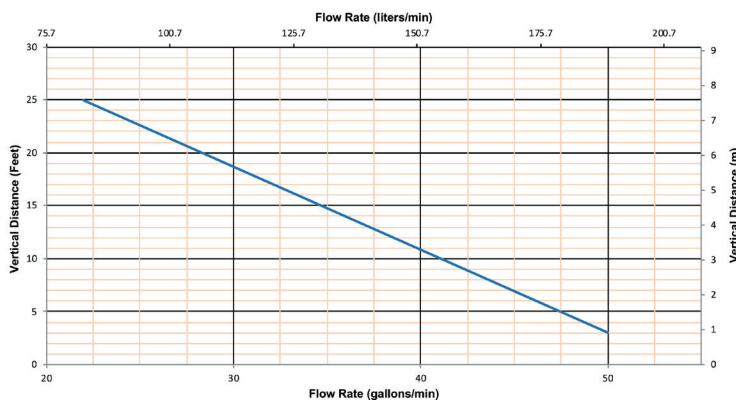

OPTIONAL ACCESSORIES

Descaler
(Part N° 052)
See page 28



Wired alarm unit



TECHNICAL SPECIFICATIONS

- Pump type:** Simplex drain pump
- Electrical:** 120 V - 60 Hz / 8.3 Amps (Max)
- Motor:** 1.3 HP oil-filled thermally protected motor
- Capacitor rating:** 45 microfarad
- Operating Temperature:** 194°F Max.
- Power cord length:** 50 inches
- Noise level:** ≤ 68 dBA (Lp) (measured at 3 ft.)
- Discharge pipe diameter:** 1"
- Discharge rate at 25 ft:** 22 GPM
- Discharge rate at 3 ft:** 50 GPM
- Shut-off head:** 44 ft.
- Normal running time:** 4-6 Seconds (Short bursts)
- Capacity:** 2.75 gallons / 10.4 liters
- Inlets:** 2" (sides), 1-1/4" vent (top)
- Method of activation:** Pressure switch/ circuit board
- Shower/bathtub base height:** 10" min
- Weight:** 22 lbs / 10 kg
- Certifying agencies:** CSA (IPC, NSPC), IAPMO (UPC)
- Connections:** Commercial sink, dishwasher, washing machine, etc.

DIMENSIONAL DRAWINGS

