


Sanicondens® Best Flat PART N° 044

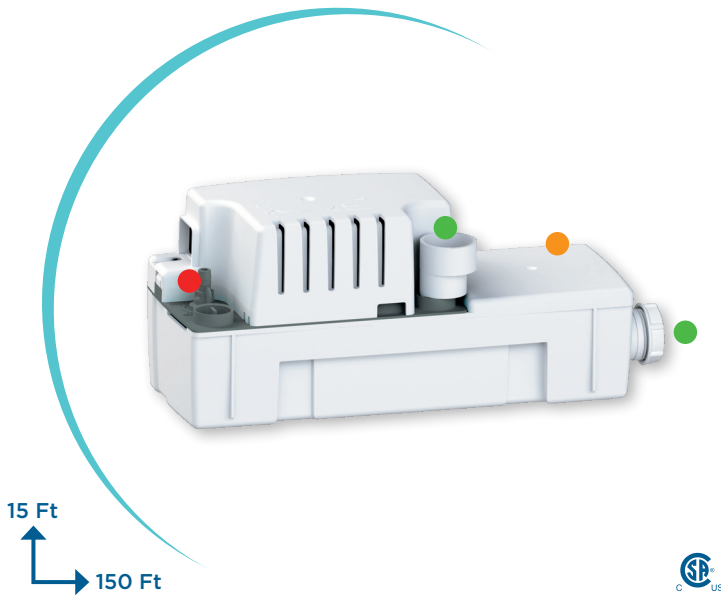


CONNECTIONS

- Discharge: 3/8"
- Inlets
- Comes equipped with a built-in neutralizer to raise pH levels

PRODUCT FEATURES

- A low profile pump used to neutralize and pump condensate from condensing boilers, HVAC systems, water heater systems, etc.
- Pump neutralized condensate waste up to 15 feet in height and/or 150 feet away from a soil stack.
- Will neutralize condensate from appliances up to 500,000 BTU/ hour input.

PUMP CURVE

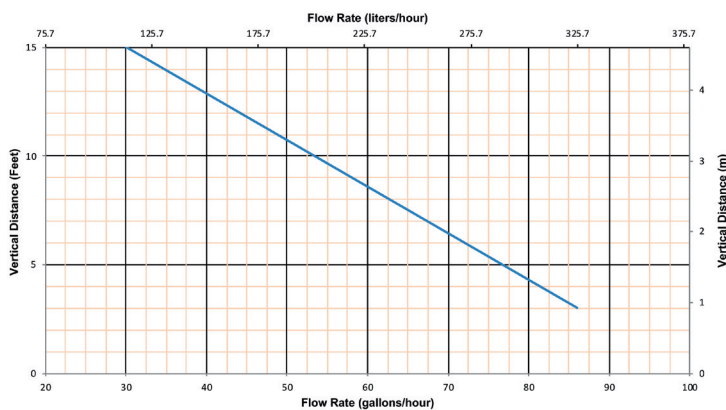

STANDARD ACCESSORIES

Neutralizing Granules
(Part N° 042)



TECHNICAL SPECIFICATIONS

- Pump type:** Condensate pump
- Electrical:** 120 V - 60 Hz / 1.5 Amps (Max)
- Motor:** 1/30 HP oil-filled thermally protected motor
- Operating Temperature:** 160°F Max
- Power cord length:** 61-1/2 inches
- Noise level:** ≤ 44 dBA (Lp) (measured at 3 ft.)
- Discharge pipe diameter:** 3/8"
- Discharge rate at 15 ft:** 30 GPH
- Discharge rate at 3 ft:** 86 GPH
- Normal running time:** 3-5 sec (Short bursts)
- Capacity:** 0.9 gallons / 3.4 liters
- Inlets:** 1" (top), 1" (side)
- Method of activation:** Float/Microswitch
- Weight:** 12 lbs / 5.4 kg
- Certifying agencies:** CSA (IPC, NSPC)
- Connections:** Condensing boiler, HVAC systems, air conditioners

DIMENSIONAL DRAWINGS

