




## CONNECTIONS

- Discharge: 3/4" or 1"
- Inlet: 2"
- Vent: 1-1/2"

## PRODUCT FEATURES

- Install a complete bathroom up to 15 feet below the sewer line, or even up to 150 feet away.
- Macerating system for residential applications.
- The blade is made out of a hardened stainless steel material which eliminates the need for any service or replacement.

## PUMP CURVE

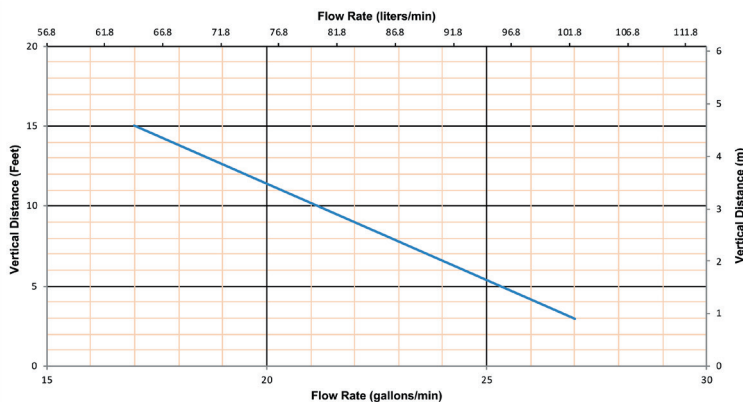

## OPTIONAL ACCESSORIES

**Sanialarm**  
(Part N° 050)  
See page 28



**Descaler**  
(Part N° 052)  
See page 28



**Extension Pipe**  
(Part N° 030)  
See page 28



## TECHNICAL SPECIFICATIONS

- Pump type:** Macerator
- Electrical:** 120 V - 60 Hz / 4.5 Amps (Max)
- Motor:** 0.5 HP oil-filled thermally protected motor
- Capacitor rating:** 45 microfarad
- Operating Temperature:** 104°F (110°F Max.)
- Power cord length:** 47-1/2 inches
- Noise level:** ≤ 53 dBA (Lp) (measured at 3 ft.)
- Discharge pipe diameter:** 3/4" or 1"
- Discharge rate at 15 ft:** 17 GPM
- Discharge rate at 3 ft:** 27 GPM
- Shut-off head:** 30 ft.
- Normal running time:** 10-12s
- Capacity:** 3 gallons / 11.4 liters
- Inlets:** 2" (sides), 1-1/2" vent (top)
- Method of activation:** Membrane/microswitch
- Shower/bathtub base height:** 6" min
- Weight:** 18 lbs / 8.2 kg
- Certifying agencies:** CSA (IPC, NSPC), IAPMO (UPC)
- Connections:** Saniflo's rear discharge toilet, sink, shower/bathtub

## DIMENSIONAL DRAWINGS

