

16 Ft
150 Ft



LIGHT COMMERCIAL GRADE


CONNECTIONS

- Discharge: 1", 1-1/4" or 1-1/2"
- Inlet: Two 2" and one 1-1/2"
- Vent: 1-1/2"

PRODUCT FEATURES

- A drain pump used for a variety of fixtures in commercial and residential applications.
- Able to discharge the waste up to 16 feet vertical and/or 150 feet horizontal.
- Capable of handling 3/8" solids as well as grease from residential kitchen applications.

PUMP CURVE

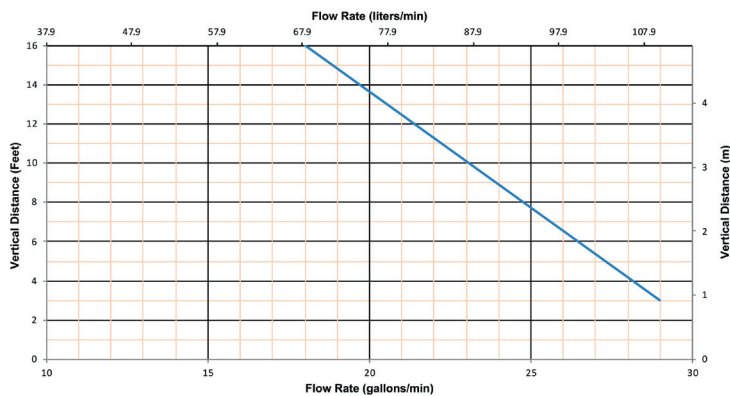

OPTIONAL ACCESSORIES

Sanialarm
(Part N° 050)
See page 28



Descaler
(Part N° 052)
See page 28



TECHNICAL SPECIFICATIONS

- Pump type:** Drain pump
- Electrical:** 120 V - 60 Hz / 4.5 Amps (Max)*
- Motor:** 0.4 HP oil-filled thermally protected motor
- Capacitor rating:** 18 microfarad
- Operating Temperature:** 140°F
- Power cord length:** 42-1/2 inches
- Noise level:** ≤ 44 dBA (Lp) (measured at 3 ft.)
- Discharge pipe diameter:** 1" - 1-1/2"
- Discharge rate at 16 ft:** 18 GPM
- Discharge rate at 3 ft:** 29 GPM
- Shut-off head:** 30 ft.
- Normal running time:** 3-5 seconds (Short bursts)
- Capacity:** 3.7 gallons / 14 liters
- Inlets:** 2" (sides), 1-1/2" vent (top)
- Method of activation:** Membrane/microswitch
- Shower/bathtub base height:** 6" min
- Weight:** 16 lbs / 7.25 kg
- Certifying agencies:** CSA (IPC, NSPC)
- Connections:** Sink, shower/bathtub, washing machine (indirect), dishwasher, laundry sink, etc.

* Measured using 1" discharge. Information will vary once the discharge size is increased. Consult with factory.

DIMENSIONAL DRAWINGS

