



## Ball Bearing Locking 250kg Drawer Slide 76mm

**Extension:** 100%

**Load Rating:** up to 250kg

**Profile Height:** 76mm

**Profile Thickness:** 19.1mm

**Finish:** Zinc Plated


**Material:** Cold Rolled Steel

**Fixing Method:** Screw or Rivet

**Features:** Lock In/Out

### Applications suitable for:


- ATM's and Vending Machines
- Tool Box Storage Units
- Vehicle Conversions
- Vehicle Stowage
- Motorhomes
- Under Stairs Storage
- Computer Server Storage
- Industrial Machinery

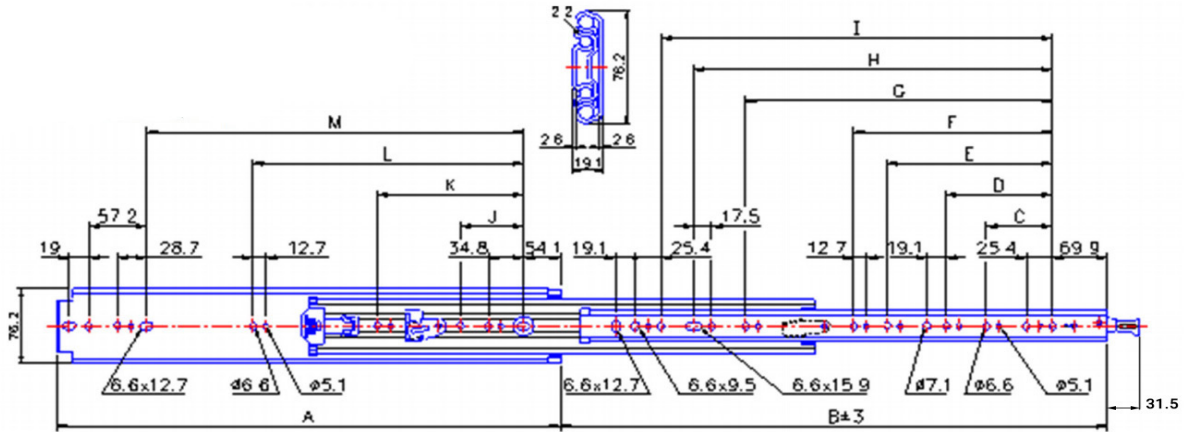

SKU	Slide Length A (mm)	Slide Travel B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)	J (mm)	K (mm)	L (mm)	M (mm)	Slide Weight	Load Bearing (10,000 Cycles)	
DS50014LK	355.6	14	355.6	14	-	-	-	-	-	-	166.6	-	-	212.6	3.5KG	130KG
DS50016LK	406.4	16	406.4	16	88.9	-	-	-	-	-	217.4	-	-	263.4	4.0KG	180KG
DS50018LK	457.2	18	457.2	18	88.9	-	-	-	-	-	268.2	-	-	314.2	4.5KG	250KG
DS50020LK	508	20	508	20	88.9	-	-	-	258.8	319	-	-	-	365	5.0KG	250KG
DS50022LK	558.8	22	558.8	22	88.9	152.4	-	-	309.6	369.8	-	-	-	415.8	5.6KG	250KG
DS50024LK	609.6	24	609.6	24	88.9	152.4	-	-	360.4	420.6	-	-	-	466.6	6.0KG	250KG
DS50026LK	660.4	26	660.4	26	88.9	152.4	-	-	411.2	471.4	-	-	-	517.4	6.8KG	250KG
DS50028LK	711.2	28	711.2	28	88.9	152.4	-	-	462	522.2	-	-	-	568.2	7.3KG	250KG
DS50030LK	762	30	762	30	88.9	152.4	-	-	512.8	573	193.6	-	460.3	619	7.8KG	230KG
DS50032LK	812.8	32	812.8	32	88.9	152.4	-	-	563.6	623.8	193.6	352.3	511.1	669.8	8.3KG	230KG
DS50034LK	863.6	34	863.6	34	88.9	152.4	330.2	431.8	614.4	674.6	193.6	377.7	561.9	720.6	8.8KG	230KG
DS50036LK	914.4	36	914.4	36	88.9	152.4	330.2	482.6	665.2	725.4	193.6	403.1	612.7	771.4	9.3KG	230KG
DS50038LK	965.2	38	965.2	38	88.9	152.4	330.2	482.6	716	776.2	193.6	428.5	663.5	822.2	10.0KG	230KG
DS50040LK	1016	40	1016	40	88.9	152.4	330.2	-	766.8	827	193.6	504.7	714.3	873	10.3KG	230KG
DS50042LK	1066.8	42	1066.8	42	88.9	152.4	330.2	-	817.6	877.8	193.6	504.7	765.1	923.8	11.0KG	200KG
DS50044LK	1117.8	44	1117.8	44	88.9	152.4	330.2	-	868.4	928.6	193.6	504.7	815.9	974.6	11.4KG	200KG
DS50046LK	1168.4	46	1168.4	46	88.9	152.4	330.2	482.6	919.2	979.4	193.6	530.1	866.7	1025.4	11.8KG	200KG
DS50048LK	1219.2	48	1219.2	48	88.9	152.4	330.2	482.6	970	1030.2	193.6	555.5	917.5	1076.2	12.3KG	180KG
DS50050LK	1270	50	1270	50	88.9	152.4	330.2	482.6	1020.8	1081	193.6	555.5	917.5	1127	12.8KG	180KG
DS50052LK	1320.8	52	1320.8	52	88.9	152.4	330.2	482.6	1071.6	1131.8	193.6	555.5	917.5	1177.8	13.3KG	170KG
DS50054LK	1371.6	54	1371.6	54	88.9	152.4	330.2	482.6	1122.4	1182.6	193.6	555.5	917.5	1228.6	13.8KG	170KG
DS50056LK	1422.4	56	1422.4	56	88.9	152.4	330.2	482.6	1173.2	1233.4	193.6	555.5	917.5	1279.4	14.3KG	150KG
DS50058LK	1473.2	58	1473.2	58	88.9	152.4	330.2	482.6	1224	1284.2	193.6	555.5	917.5	1330.2	14.8KG	150KG
DS50060LK	1524	60	1524	60	88.9	152.4	330.2	482.6	1092.4	1274.8	1335	193.6	555.5	917.5	15.4KG	150KG

Dimensions not binding.

Slide Reset Instructions

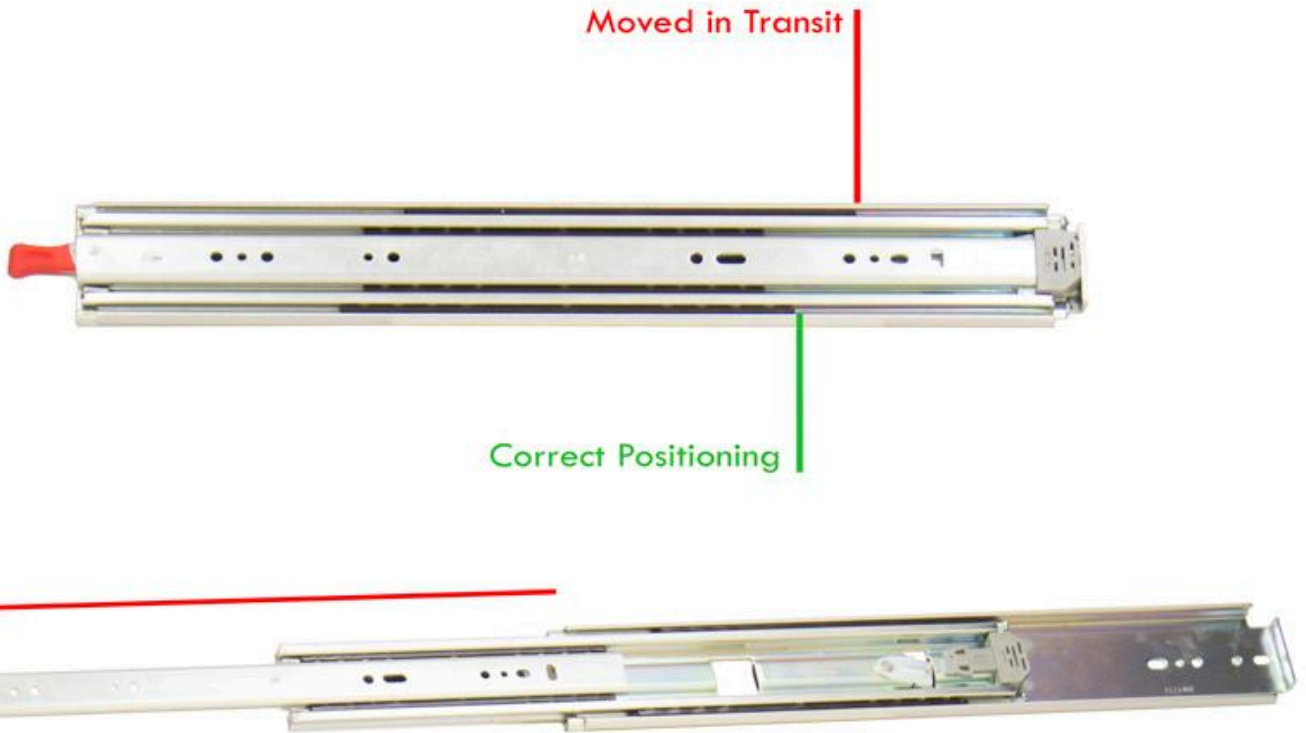

Forcing each rail fully open will reset the ball bearing cage in the slide allowing the locking mechanism to function correctly.