




Tuma Telescopic Heavy Duty Slide

- Load Rating Up to 250KG
- 76.2mm Profile
- 19.1 Thickness
- 100% Extension



Ideal Solution for:

- ATM & Vending Machines
- Tool Storage
- Vehicles
- Computer Server Storage
- Industrial Machinery

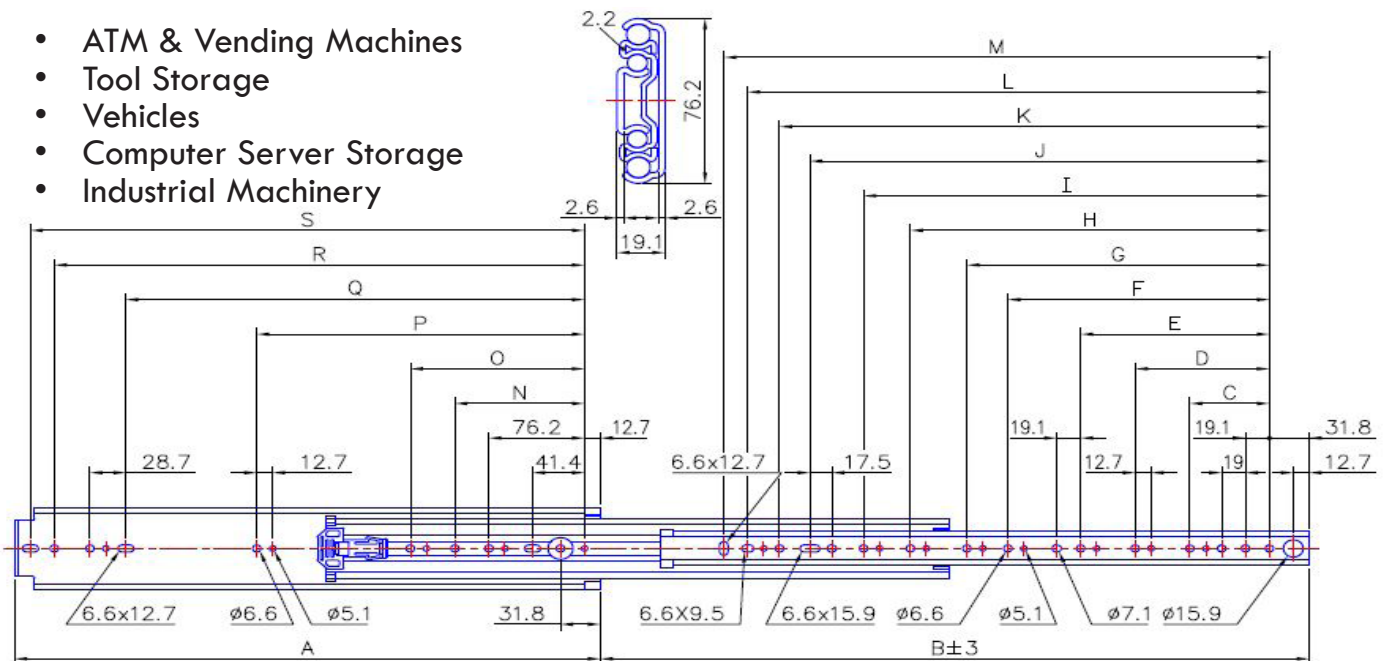

Item No.	Slide Length A inch / mm		Slide Travel B inch / mm		C(mm)	D(mm)	E(mm)	F(mm)	G(mm)	H(mm)	I(mm)	J(mm)	K(mm)	L(mm)	M(mm)	N(mm)	O(mm)	P(mm)	Q(mm)	R(mm)	S(mm)	Slide Weight	Load Rating	
DS50008	8	203.2	8	203.2	-	-	-	-	-	-	-	-	52.3	77.7	96.8	-	-	-	101.6	158.8	177.8	2.0KG	130KG	
DS50010	10	254	10	254	63.5	-	-	-	-	-	-	-	103.1	128.5	147.6	-	-	-	152.4	209.6	228.6	2.5KG	130KG	
DS50012	12	304.8	12	304.8	63.5	-	-	-	-	-	-	-	153.9	179.3	198.4	-	-	-	203.2	260.4	279.4	3.0KG	130KG	
DS50014	14	355.6	14	355.6	63.5	-	-	-	-	-	-	-	204.7	230.1	249.2	-	-	-	254	311.2	330.2	3.5KG	130KG	
DS50016	16	406.4	16	406.4	63.5	127	-	-	-	-	-	-	255.5	280.9	300	-	-	-	304.8	362	381	4.0KG	180KG	
DS50018	18	457.2	18	457.2	63.5	127	-	-	-	-	-	246.1	306.3	331.7	350.8	-	-	-	355.6	412.8	431.8	4.5KG	250KG	
DS50020	20	508	20	508	63.5	127	190.5	-	-	-	-	-	296.9	357.1	382.5	401.6	-	-	-	406.4	463.6	482.6	5.0KG	250KG
DS50022	22	558.8	22	558.8	63.5	127	190.5	-	-	-	-	-	347.7	407.9	433.3	452.4	-	-	-	457.2	514.4	533.4	5.6KG	250KG
DS50024	24	609.6	24	609.6	63.5	127	190.5	-	-	-	-	-	398.5	458.7	484.1	503.2	-	-	-	508	565.2	584.2	6.0KG	250KG
DS50026	26	660.4	26	660.4	63.5	127	190.5	-	-	-	-	-	449.3	509.5	534.9	554	-	-	-	558.8	616	635	6.8KG	250KG
DS50028	28	711.2	28	711.2	63.5	127	190.5	-	-	-	-	-	500.1	560.3	585.7	604.8	-	-	-	609.6	666.8	685.8	7.3KG	250KG
DS50030	30	762	30	762	63.5	127	190.5	368.3	-	-	-	-	550.9	611.1	636.5	655.6	235	-	501.7	660.4	717.6	736.6	7.8KG	230KG
DS50032	32	812.8	32	812.8	63.5	127	190.5	368.3	-	-	-	-	601.7	661.9	687.3	706.4	235	393.7	552.5	711.2	768.4	787.4	8.3KG	230KG
DS50034	34	863.6	34	863.6	63.5	127	190.5	368.3	469.9	-	-	-	652.5	712.7	738.1	757.2	235	419.1	603.3	762	819.2	838.2	8.8KG	230KG
DS50036	36	914.4	36	914.4	63.5	127	190.5	368.3	469.9	469.9	-	-	703.3	763.5	788.9	808	235	444.5	654.1	812.8	870	889	9.3KG	230KG
DS50038	38	965.2	38	965.2	63.5	127	190.5	368.3	469.9	-	-	-	754.1	814.3	839.7	858.8	235	469.9	704.9	863.6	920.8	939.8	10.0KG	230KG
DS50040	40	1016	40	1016	63.5	127	190.5	368.3	469.9	-	-	-	804.9	865.1	890.5	909.6	235	546.1	755.7	914.4	971.6	990.6	10.3KG	230KG
DS50042	42	1066.8	42	1066.8	63.5	127	190.5	368.3	469.9	-	-	-	855.7	915.9	941.3	960.4	235	546.1	806.5	965.2	1022.4	1041.4	11.0KG	230KG
DS50044	44	1117.8	44	1117.8	63.5	127	190.5	368.3	469.9	-	-	-	906.5	966.7	992.1	1011.2	235	546.1	857.3	1016	1073.2	1092.2	11.4KG	200KG
DS50046	46	1168.4	46	1168.4	63.5	127	190.5	368.3	469.9	825.5	-	-	957.3	1017.5	1042.9	1062	235	571.5	908.1	1066.8	1124	1143	11.8KG	200KG
DS50048	48	1219.2	48	1219.2	63.5	127	190.5	368.3	469.9	825.5	-	-	1008.1	1068.3	1093.7	1112.8	235	596.9	958.9	1117.8	1174.8	1193.8	12.3KG	180KG
DS50050	50	1270	50	1270	63.5	127	190.5	368.3	469.9	825.5	-	-	1058.9	1119.1	1144.5	1163.6	235	596.9	958.9	1168.4	1225.6	1244.6	12.8KG	180KG
DS50052	52	1320.8	52	1320.8	63.5	127	190.5	368.3	469.9	825.5	-	-	1109.7	1169.9	1195.3	1214.4	235	596.9	958.9	1219.2	1276.4	1295.4	13.3KG	170KG
DS50054	54	1371.6	54	1371.6	63.5	127	190.5	368.3	469.9	825.5	-	-	1160.5	1220.7	1246.1	1265.2	235	596.9	958.9	1270	1327.2	1346.2	13.8KG	170KG
DS50056	56	1422.4	56	1422.4	63.5	127	190.5	368.3	469.9	825.5	-	-	1211.3	1271.5	1296.9	1316	235	596.9	958.9	1320.8	1378	1397	14.3KG	150KG
DS50058	58	1473.2	58	1473.2	63.5	127	190.5	368.3	469.9	825.5	-	-	1262.1	1322.3	1347.7	1366.8	235	596.9	958.9	1371.6	1428.6	1447.8	14.8KG	150KG
DS50060	60	1524	60	1524	63.5	127	190.5	368.3	469.9	-	1130.5	1312.9	1373.1	1398.5	1417.6	235	596.9	958.9	1422.4	1479.6	1498.6	15.4KG	150KG	

Please note, slides installed in drawers that are wider than they are deep are subjected to lateral stresses that reduce their load carrying capacity. As well as slides in applications that are cycled frequently will also carry a lower load rating. Tests are done according to ANSI/BIFMA X5.9 - 2008 Standard 15.2.1 cycle test for extendible elements deeper than wide (cycle test 30,000). If you have any queries regarding specifications please contact us on sales@eurofitsystems.com or 01482 714488. Eurofit reserve the right to alter specifications without notice at any time.