

GWMS2 Wall Mounted Switch Kit

For Use With DESA International Remote-Ready Log Sets, Fireplace Systems, or Stoves

READ AND FOLLOW INSTALLATION INSTRUCTIONS !

**INSTALLATION SHOULD BE DONE BY A QUALIFIED INSTALLER
FAMILIAR WITH LOW-VOLTAGE WIRING PROCEDURES.**

**⚠ WARNING: Do not connect this switch, or log set to any electrical source!
Electrical shock and/or fire hazard will occur.**

Contents Of Kit

- Switch
- Switch Cover (With Screws)
- 25 Ft. Wire

Connecting To Log Set

1. Connect one terminal of 25 ft. wire to bottom contact of selector switch located on heater front control panel (see Figure 1).
2. Connect remaining wire terminal to the "TH" terminal on the control valve (see Figure 1).
3. Route the 25 ft. wire to a convenient location.

⚠ WARNING: Do not connect the switch to a power source. Electrical shock and/or fire hazard will occur.

IMPORTANT: The wire may be shortened but must not be lengthened.

4. Connect one bare wire end to each of the terminals of the provided wall switch.
5. Install the wall switch and cover in the wall.

Operation

1. Set selector switch to AUTO.
2. Turn burner flame on and off with wall switch. *NOTE:* When wall switch is in the OFF position, the pilot will remain lit.

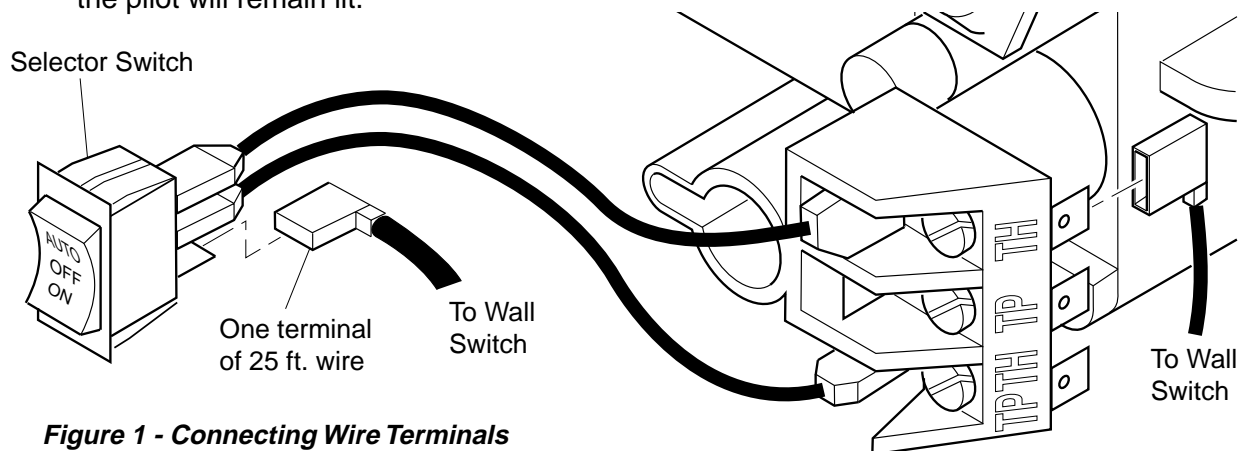


Figure 1 - Connecting Wire Terminals



107236 01

NOT A UPC

DESA
INTERNATIONAL

2701 Industrial Drive
P.O. Box 90004
Bowling Green, KY 42102-9004
www.desatech.com

107236-01
Rev. A
02/00