


# SC-DX-EC6 6½" In-Ceiling Speakers

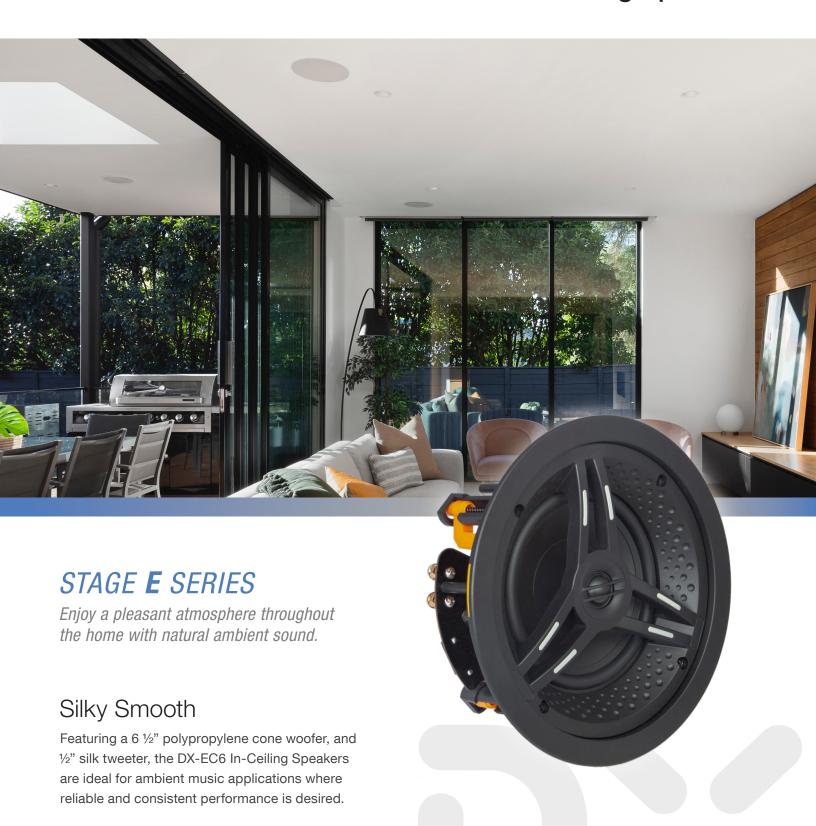

### SC-DX-EC6

## 61/2" In-Ceiling Speakers (PAIR)

### **Features**

#### • 6 1/2" Polypropylene Woofer

Low Crossover points and a poly woofer that's mounted as close to the surface as possible delivers reliable and consistent performance.

#### ■ 1/2" Silk Dome Tweeter

Silk dome tweeter reduces the severity of break-up modes resulting in smooth highs which are pleasing to the ear.

#### Low Profile Grill

A thin-bezel magnetic grille ensures a secure fit, pleasing aesthetic—and with a one-step paint process, blends discreetly into any decor.

#### Easy-Grip Tweeter Bridge

Installing speakers above your head requires a sturdy grip point and the SpeakerCraft Tweeter bridge ensures you have one. We even protect the tweeter from accidental finger pokes.

#### Precision Tooled Diffusion Baffle

Scattered concavities reduce reflection and disperse the sound evenly for a natural room filling experience.

#### Secure Connection

All SpeakerCraft speakers feature spring loaded binding posts that provide a secure, worry-free connection in the wall or ceiling.

#### Timbre and Performance Matched

Expect consistent dynamic and detailed sound in every Stage E series speaker.



### Specifications

Woofer Size	6.5" (160mm)
Woofer Construction	Polypropylene Cone
Tweeter	1/2" (13mm) Fixed Silk Dome
Frequency Response	52Hz-20kHz
Impedance	8 Ohms
Power Handling	100 Watts
Sensitivity	88 db
Timbre	Timbre-Matched to all E-Series Speakers
Dimensions	9.625" (210mm) Diameter 3.8" (97mm) Depth
Hole Cutout Dimensions	8.25" (210mm) Diameter
Depth Behind Wall	3.7" (94mm)

Use Pre-Construction Bracket Model #: EL-PCB-IC-6





