



SPECIFICATION SHEET



APPLICATION INFORMATION

- COMMERCIAL SITES
- EDUCATIONAL PROVIDERS
- RETAIL

The LED Batten fittings are suitable for the replacement of a fluorescent fitting or for an economical LED lighting solution for corridors and large spaces.









SPECIFICATION

- LED:** 48-288pcs of SMD 2835
- Material:** Powder coated metal body and polycarbonate diffuser
- Colour Temperature:** 4100K
- Guarantee:** 5 Years
- Life Expectancy:** 50,000 Hours
- Working Temperature:** -15°C - 45°C / 0°C - 45°C (emergency versions)
- Beam Angle:** 120°
- CRI:** >80 Ra
- Extra Information:**
 - IK03 - Polycarbonate diffuser
 - IK07 - Metal body

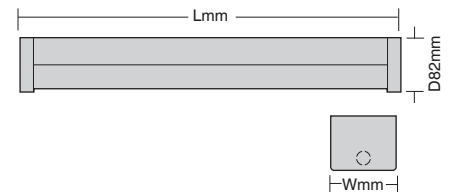

MODEL	SINGLE / TWIN	WATTAGE	LUMEN OUTPUT	POWER FACTOR	DIMENSIONS (L x W x D MM)
BF210W-1	SINGLE	10W	1000lm	0.5	620 x 69 x 82
BF530W-1	SINGLE	24W	2500lm	0.95	1530 x 69 x 82
BF550W-1	TWIN	46W	4900lm	0.95	1530 x 109 x 82
BF630W-1	SINGLE	28W	3000lm	0.95	1795 x 69 x 82
BF660W-1	TWIN	56W	6000lm	0.95	1795 x 109 x 82