

*ANEMOI
ADJUSTABLE
RISER
(BASEBAR)*

WATTSHOP
The Relentless Pursuit of Speed

WATTSHOP

The Relentless Pursuit of Speed

Anemoi Adjustable Riser (Basebar)

Thank you for purchasing our WattShop #Anemoi adjustable angled risers. We hope they serve you well in achieving maximum performance in all of your races! Please share your pictures and results on Facebook, Twitter and Instagram using #WattShop.

WATTS IN THE BOX

No	Part Description	Quantity	Torque
1	Adjustable riser (upper)	1 (pair)	-
2	Adjustable riser (lower)(basebar)	1 (pair)	-
3	Retaining nuts (front)	1 (pair)	-
4	Retaining nuts (rear)	1 (pair)	-
5	M5x16mm grub screw	4	-
6	Anti-vibration washer	4	-
7	M5x18mm low cap head bolt	2	5Nm
8	M5x25mm low cap head bolt	2	5Nm
OPTIONAL			
9	M5x25mm cap head bolt	2	5Nm
10	M5x35mm cap head bolt	2	5Nm

NOTES


The optional bolts are only required when the riser is used in conjunction with the Anemoi extensions and must be requested separately.

TOOLS REQUIRED

T25 Torx key Torque wrench
M2.5 Hex key

NOTES

The M2.5m hex does not required any torque to be applied. Finger tight only is more than sufficient.

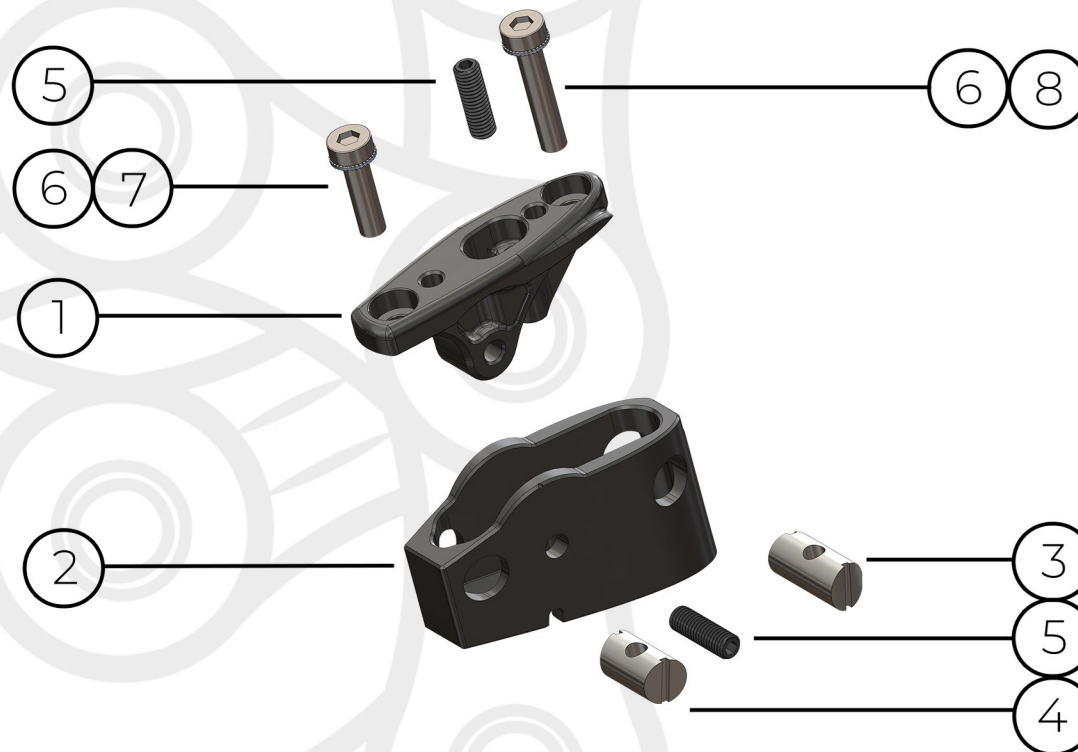

WattShop Anemoi basebar specific adjustable risers are compatible only when used in conjunction with our Anemoi basebar, mount plates or mono brackets and provide you with the ability to micro adjust your arm rest angle from 10 degrees through to 30 degrees.

The risers have two M5 threaded bosses on the underside that interlock with WattShop specific componentry and is the reason why they can not be used universally. They are ideal for use with our Anemoi basebar and riser stack spacers as they provide a much simpler and easier arrangement for quick stack height adjustment.

These can not be used as a standalone item to angle your armrests. They must be combined with either our Anemoi extensions or one of our pole clamps options in conjunction with the aforementioned Anemoi basebar, mount plates or mono brackets.



WATTSHOP


The Relentless Pursuit of Speed

INSTALLATION GUIDE

1. Lay all components and hardware out on a table. You may need to dismantle the adjustable riser.



2. Position the lower riser (part 2) onto the top of your Anemoi basebar riser stack, mount plates or mono bracket, depending on how you are planning to install. Bolt up from the underside of the relevant part with the correct bolt length.

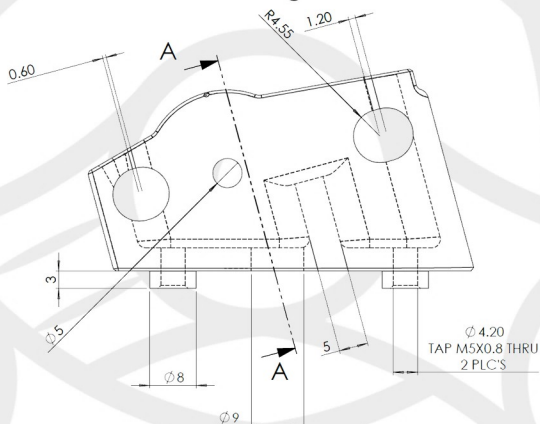


3. Position the upper riser (part 1) into the lower riser. Insert the lateral grub screw (part 5), torque to 1Nm (do not exceed).


Set the tilt to your desired angle, initially by screwing in the central grub screw (part 5) from the top of the upper riser.



4. Slide the retaining nuts (parts 3 and 4), into the lower riser. The shorter nut to the rear hole and the longer nut to the front.



Install the M5x25mm bolt (part 8) to the front hole and the M5x18mm bolt to the rear hole (part 7) with the groove in the retaining nuts aligned vertically and **torque to 5Nm**. You will need to torque the front bolt first. Ensure the anti-vibration washers (part 6) are installed.



5. At this stage you will need to refer to the installation guide relative to your proposed setup. Whether this is the Anemoi extensions, the universal or the inline pole clamps.

Please note that when used in combination with the Anemoi extensions or inline pole clamps then parts 7 and parts 8 will be swapped for the optional bolts referred to in the parts list.

Below image shows the basebar riser used with the Anemoi basebar and riser stack spacers.

