

Technical information

ACRYLITE® Reflections

Iridescent acrylic

Product

Rainbows never cease to fascinate us. We gaze at them in wonder and amazement. With their brilliant colors and awesome dimensions, they capture the attention of children and adults alike. Take advantage of this magical play of colors for your displays, signs and store fixtures by using ACRYLITE® Reflections iridescent acrylic sheet.


Features & Benefits

- changes color depending on the viewing angle
- uses ambient light to create its own lighting effects
- produces mirror-like reflections
- shines in every color of the rainbow
- easy to saw, mill, drill, bend and polish

ACRYLITE® Reflections iridescent sheet is the ideal material for designing eye-catching items, attention-grabbing displays, effective signs and dynamic, colorful tradeshow booths and store fixtures. It is a beautiful addition to the ACRYLITE® sheet product line and a real inspiration for all designers and creative professionals.

Product Specifications

| | Sizes | Thickness |
|------------------------------|-----------|----------------|
| Rainbow Dichromatic 0B008 RT | 48" x 96" | .118" (3.0 mm) |

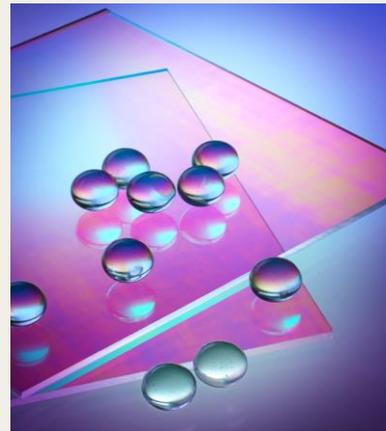

Fabricating Recommendations

ACRYLITE® Reflections iridescent sheet has a surface coating on one side that is responsible for the lighting effects. The following recommendations take this special feature into account during handling and fabrication.

ACRYLITE® Reflections iridescent can be fabricated with the same parameters and equipment as standard acrylic sheet. Correct positioning of the coated surface is essential in order to obtain perfect fabrication results.

Cleaning

Clean ACRYLITE® Reflections iridescent sheet with mild soap and lukewarm water or ACRIFIX® AC 1010 Anti-Static Cleaner. Use a soft, clean cloth and gentle pressure (no rubbing). Make sure not to scratch the coated surface, because scratches

cannot be removed by polishing this side of the sheet.

Machining

ACRYLITE® Reflections iridescent sheet can be sawn, drilled, milled and edge-machined like standard ACRYLITE® extruded acrylic sheet, provided the coated surface is positioned at the correct angle to the machining tool. Make sure that the cutting tools used for sawing, drilling, routing and edge treatment enter the coated surface and exit through the uncoated surface.

Refer to ACRYLITE® extruded sheet Technical Briefs 1–13 for details.

Bonding

Adhesives suitable for standard ACRYLITE® extruded sheet are also compatible with ACRYLITE® Reflections iridescent sheet. Since ACRYLITE® Reflections iridescent sheet is partially transparent, it is important that adhesive joints remain almost invisible on the uncoated surface. The uncoated surface of ACRYLITE® Reflections iridescent can be easily bonded to standard ACRYLITE® sheet, providing comparable final bond strength. However, the final bond strength does differ noticeably when bonds are made with the coated surface. The bond with the coated surface can be improved to a certain extent using cyanoacrylate adhesives. Where high bond strengths are required, we recommend removing the surface coating in the area to be bonded. If polyester tape is used to assist with bonding, please remove the strips of tape carefully after bonding is completed, pulling them off from the surface towards the edge. That avoids delamination of the coating at the edges.

ACRIFIX® Special Bonding Agents manufactured by Evonik are the perfect complement for cementing ACRYLITE sheet products. When bonding the uncoated side of ACRYLITE® Reflections iridescent sheet, ACRIFIX® 1S 0117 Pure or ACRIFIX® 1S 2105 Express are recommended. These solvent cements have superior capillary action for better flow

through, and dry quickly with a strong bond and attractive appearance. ACRIFIX® 1S 0117 is the only non-methylene chloride solvent cement in the North American market.

Linear Heating/Line-Bending

ACRYLITE® Reflections iridescent sheet can be bent simply and quickly on standard line-bending machines. For best results, the coated side of the sheet should be on the side exposed to tensile stress (outer side of bend). At small bending radii, heat the uncoated side of the sheet. At large bending radii of more than 90°, it is advisable to heat the coated side.

Thermoforming/Stretch Forming

You can thermoform ACRYLITE® Reflections iridescent sheet to obtain a variety of shapes. If only one side of the sheet is heated, the coated surface should face the heat source. ACRYLITE® Reflections iridescent sheet is also suitable for moderate stretch forming using compressed air. In this case, and during thermoforming, the coated surface of the sheet should be on the side exposed to tensile stress (outer side). Depending on the degree of stretching, the rainbow effect may be diminished. We therefore advise you to conduct preliminary trials. The recommended forming temperature is between 290 to 320 °F.

Flame Polishing

ACRYLITE® Reflections iridescent sheet can be flame-polished under the same conditions as standard acrylic sheet. For best results, flame-polish stacked sheet. The coated surfaces should face inwards, to protect them from the flame. If you would like to flame-polish individual sheets, we recommend placing the sheet with the coated surface on a sheet of standard acrylic for better protection.

Important notes

- The coated surface is protected by a clear masking film. The uncoated surface has blue masking film.
- Scratches cannot be polished off the coated surface. Please make sure not to scratch that surface.
- ACRYLITE Radiant sheet is meant for indoor use. It has only limited resistance to outdoor exposure.
- Store the sheet horizontally on a perfectly flat surface. Do not store vertically or near heat sources.

Fire Precautions

ACRYLITE® sheet is a combustible thermoplastic. Precautions should be taken to protect this material from flames and high heat sources. ACRYLITE® sheet usually burns rapidly to completion if not extinguished. The products of combustion, if sufficient air is present, are carbon dioxide and water. However, in many fires sufficient air will not be available and toxic carbon monoxide will be formed, as it will when other common combustible materials are burned. We urge good judgement in the use of this versatile material and recommend that building codes be followed carefully to assure it is used properly.

Compatibility

Like other plastic materials, ACRYLITE® sheet is subject to crazing, cracking or discoloration if brought into contact with incompatible materials. These materials may include cleaners, polishes, adhesives, sealants, gasketing or packaging materials, cutting emulsions, etc. See the Tech Briefs in this series for more information, or contact your ACRYLITE® sheet Distributor for information on a specific product.

This information and all further technical advice is based on our present knowledge and experience. However, it implies no liability or other legal responsibility on our part, including with regard to existing third party intellectual property rights, especially patent rights. In particular, no warranty, whether expressed or implied, or guarantee of product properties in the legal sense is intended or implied. We reserve the right to make any changes according to technical progress or further developments. The customer is not released from the obligation to conduct careful inspection and testing of incoming goods. Performance of the product described herein should be verified by testing, which should be carried out only by qualified experts in the sole responsibility of a customer. Reference to trade names used by other companies is neither a recommendation, nor does it imply that similar products should be used.

Evonik Industries is a worldwide manufacturer of PMMA products sold under the ACRYLITE® trademark in the Americas and under the PLEXIGLAS® trademark in the European, Asian, African, and Australian continents. ©Evonik Cyro LLC. All rights reserved.

Printed in the USA.

Evonik Cyro LLC
299 Jefferson Road, Parsippany, NJ 07054 US
Phone +1800 631 5384
www.acrylite.net www.acrylite-shop.com