


REG 3



photo: white with grey ring, straight cable

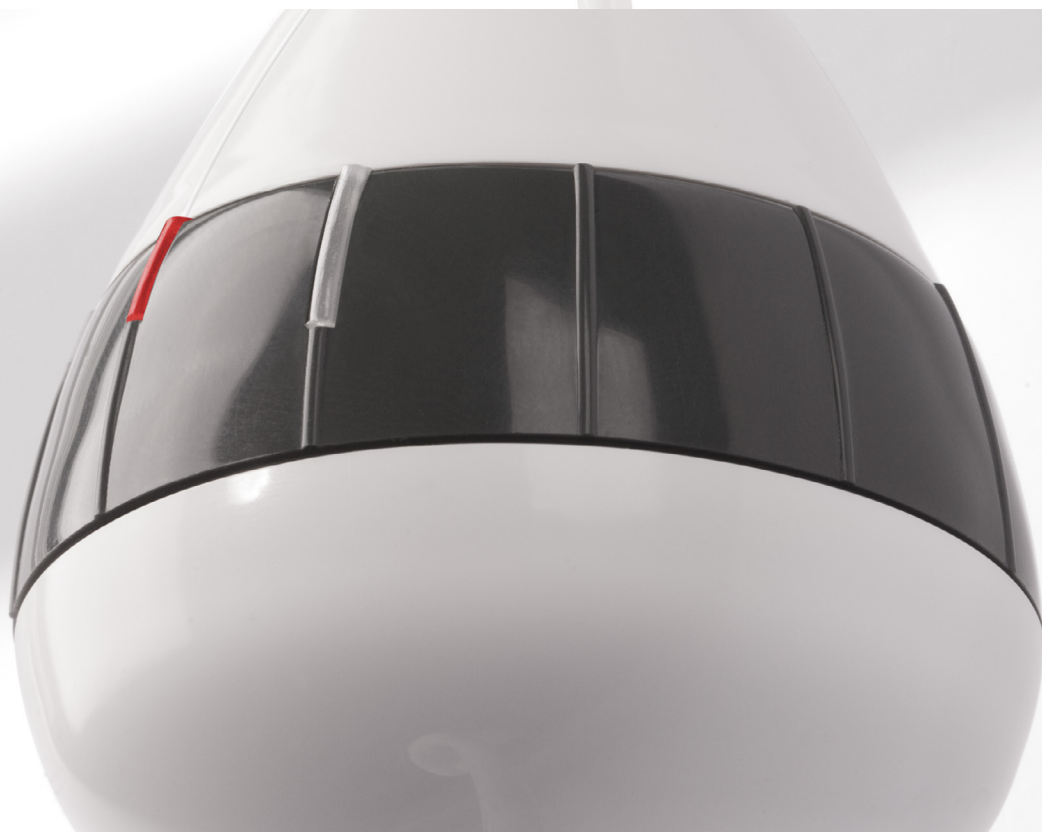

Functions and features:

Functionality

REG 3 offers two temperature settings of 50°C and 65°C. It features a bimetallic thermal cutout. The device displays currently set temperature level.

Intelligent Building Systems

In the event of a power failure the REG 3 remembers it's previous settings therefore making it suitable for connection to external timers and intelligent building systems.

Safety

REG3 is equipped with double protection against overheating of the radiator.

Design

REG 3 has small controller housing in a universal shape reminiscent of a drop of water. Control is via a rotating ring shaped switch that turns the heating element on and off and allows the selection of temperature settings.

Colour

Available colours: white, silver, chrome and black. Heating element can also be offered in any RAL colour and Terma special colours (including brass and gold) subject to a minimum order of 100pcs per colour.

Specifications:

Power supply:	230 V AC
Device protection class:	Class I
Radiator connection:	G 1/2"
Ingress protection [IP]:	IPx5

Table configurations:


Example of product code: **WE**R3**G**0**4**T**SMA**W




Code elements highlighted in blue

Model	Power [W]	Packaging	Colour	Cable Type
WE R3 G REG 3	01 120	F Foil sleeve	916 White with grey ring	W Straight cable with plug
R3T REG 3 + T piece	02 200	T Tube	SMA Silver with grey ring	P Straight cable without plug
	03 300		CRO Silver with chrome ring	U Spiral cable with plug
	04 400		905 Black with chrome ring	
	06 600			
	08 800			
	10 1000			


REG 3

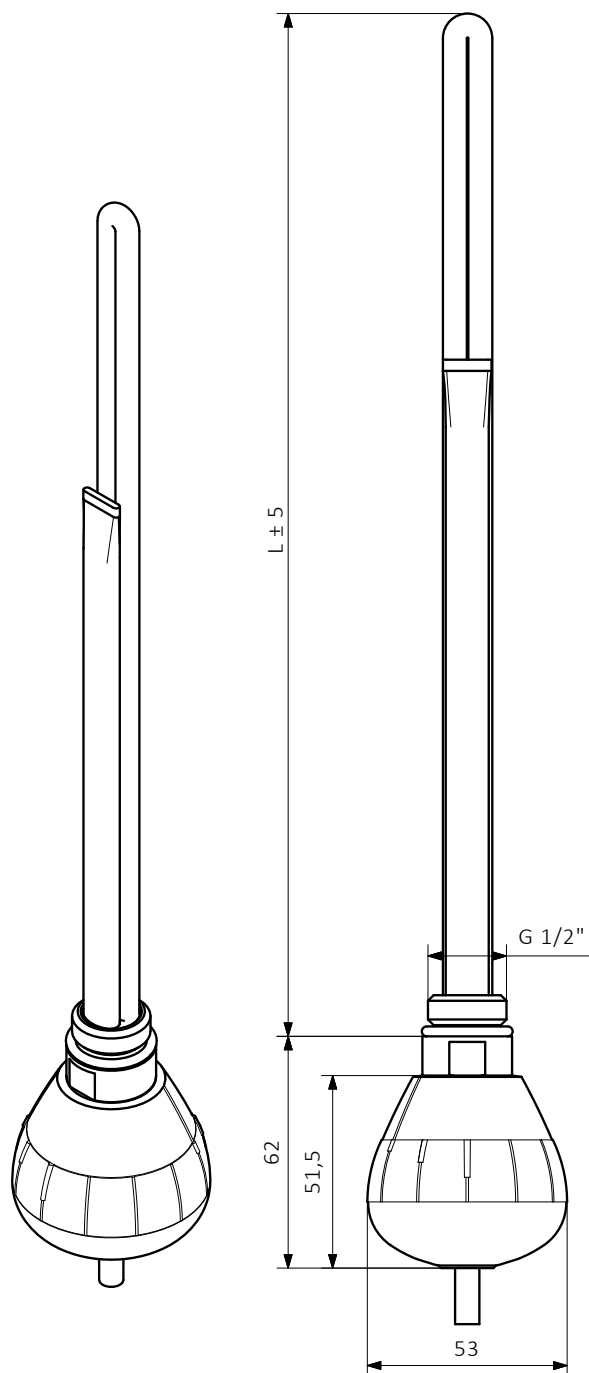


Straight cable without plug



Straight cable with plug



Spiral cable with plug



L [mm]	315	275	300	335	365	475	565
Power [W]	120	200	300	400	600	800	1000