




Single Station Welding Cell for Medium and Large Parts

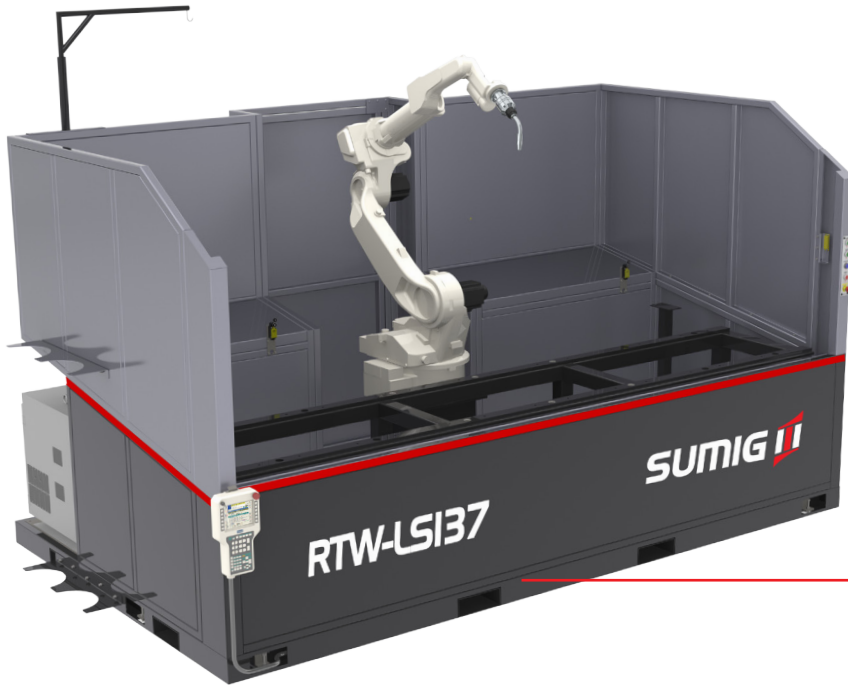

Quick installation and ready to weld model with automatic operation doors and monitored maintenance door

Fully mounted on common base, designed for big parts with low volume and variable lots

Optimized working area, easy to move

Easy integration with any robot brand and power source.



Compliant with ANSI/RIA 15.06 Standard.

Ready-To-Weld robotic welding system offers the best cost benefit ratio. Designed for welding of medium size parts and where shop space maybe an issue. Increase your productivity easily and quickly, allowing an easy integration with any robot brand and power-source.

Tabletop dimensions	26" x 137"
Maximum table load capacity	3300 lb
Maximum cell power requirements	66A
Input Voltage/Current	200V to 460V (three-phase)
Cell Dimensions	148" L x 87" W x 83" H
Weight	5500 lb
Power requirement	3PH: 230V 70A / 460V 50A
Air Requirements/Flow Rate	87 Psi/ 0.59 Cfm

All inclusive Package




+




+




Measures

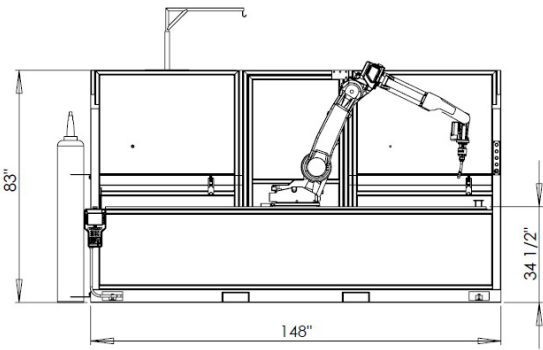

Front

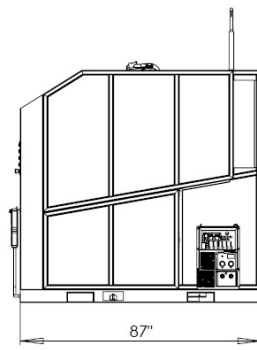

Side

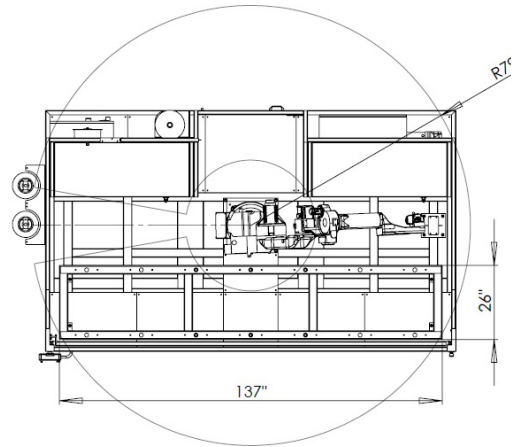

Working Area

Standard Components



6 axis




400 Amp Inverter
Power Source




400 Amp Air Cooled Torch
with Safety Clutch

Optionals

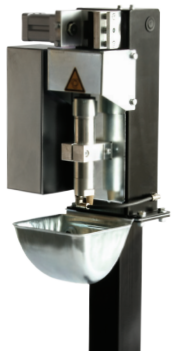

Torch Cleaner and
Wire Cutter Unit



Tooling



Neuron-S Adapt



SUMIG USA CORPORATION
8600 Commodity Circle #159
Orlando, FL 32819

☎ +1 800 503 9717
🌐 www.sumigusa.com
✉ sumigusa@sumig.com