



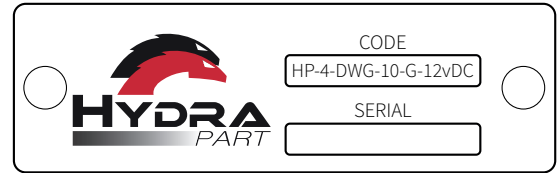


CETOP 5 Double Solenoid Valves

Hydra Part CETOP valves are used for a wide variety of mobile and industrial applications. The inter-changeable coils control the flow of oil through various port configurations.

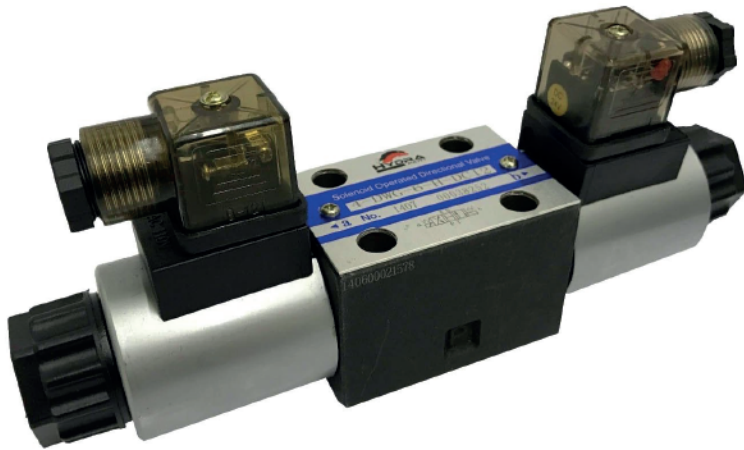

HYDRA PART	4 WAY	VALVE TYPE	SIZE	SPOOL TYPE	POWER INPUT
X	X	X	X	X	X

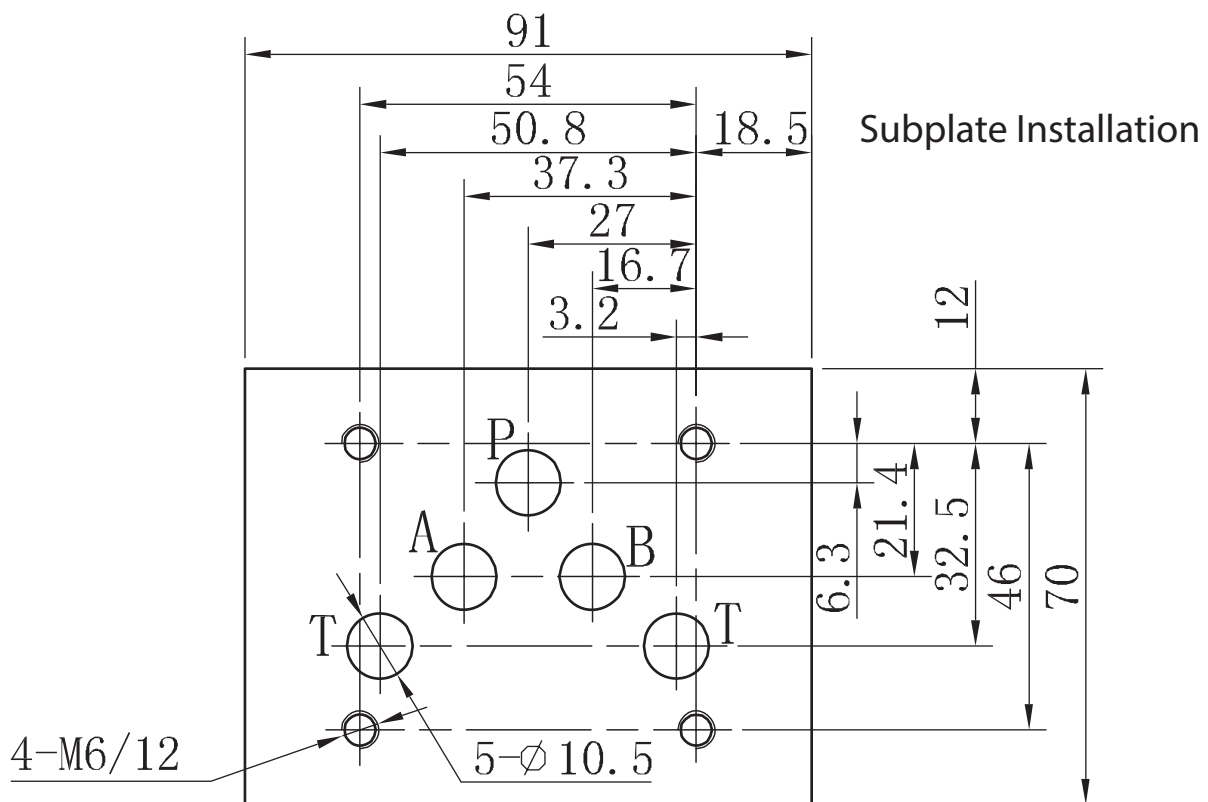


Technical data

Size	10
(L/min) Max.flow rate(L/min)	120
(MPa) Operating pressure(MPa)	A、 B、 P oil port 31.5
	T oil port 16
Weight(KGS)	6.4
Valve body (Material) Surface treatment	casting phosphating surface
Oil cleanliness	NAS1638 class 9 and ISO4406 class 20/18/15



SPOOL OPTION (SYMBOLS)

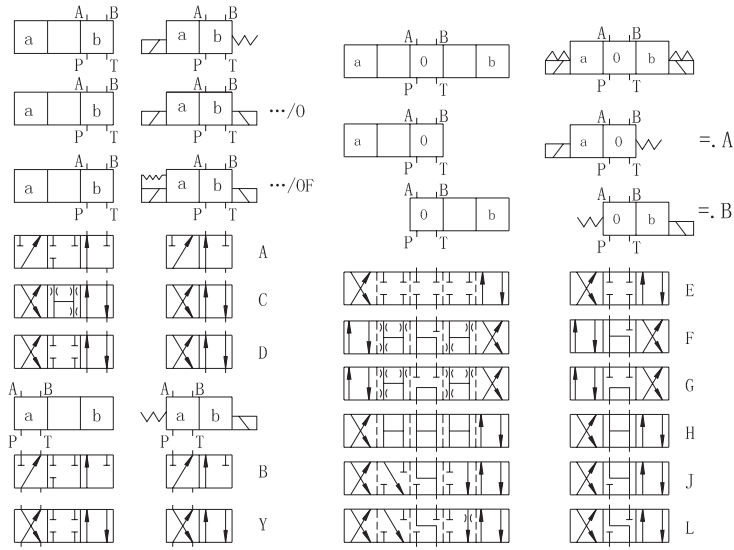

EXAMPLE:
 Spool Symbol "E" with position "a"
 Ordering Code = EA

