

# GRX

## EG SORTING GRAB

Bent body in *Strenx® 700*  
high strength  
structural steel


Claws in *Hardox® 450*  
wear-resistant steel

Check valve as standard

Accumulator optional on  
GRX 20 EG & 25 EG



**Universal hole pattern for**  
Angled excavator attachment | RMR compact rotator | WDR worm drive

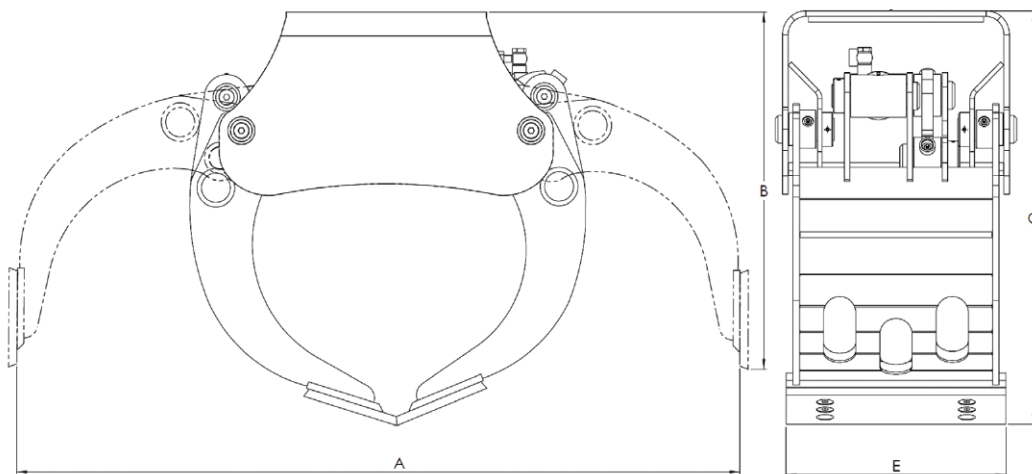

### MODEL SPECIFICATION



MODEL	Kg	m <sup>3</sup>	Bar	l/min	kN	ton
GRX 15 EG	102	0,10	200	20	6,7	3-6
GRX 20 EG	180	0,14	250	30	11	5-9
GRX 25 EG	263	0,19	250	40	14,5	8-13

	GRX 15 EG	GRX 20 EG	GRX 25 EG
<b>A</b>	1150	1300	1500
<b>B</b>	497	631	735
<b>C</b>	616	731	840
<b>E</b>	366	395	439