

GRX

LOG GRAB


Bent body in *Strenx® 700*
high strength
structural steel

Claws in *Hardox® 450*
wear-resistant steel

Check valve and
accumulator optional on
GRX 20 and 25



Universal hole pattern for
Angled excavator attachment | RMR compact rotator | WDR worm drive

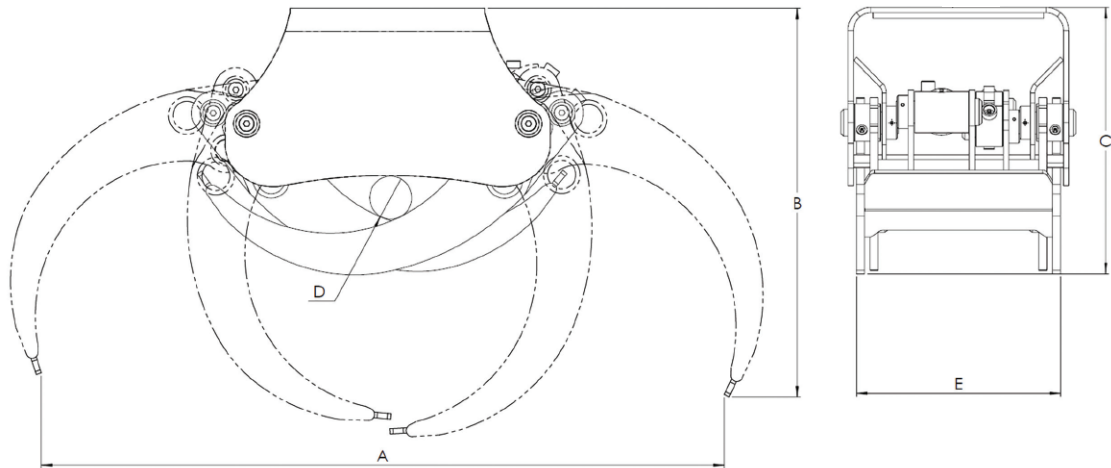

MODEL SPECIFICATION



MODEL	Kg	m ²	Bar	l/min	kN	ton
GRX 15	91	0,14	200	20	7,2	3-6
GRX 20	165	0,20	250	30	11,3	5-9
GRX 25	238	0,25	250	40	14,9	8-13

	GRX 15	GRX 20	GRX 25
A	930	1262	1424
B	618	705	812
C	398	485	543
D	63	78	85
E	316	377	419