

SERIE 3


For tractors 20-30 hp

BACKHOES



3.15

Hobby and gardening.

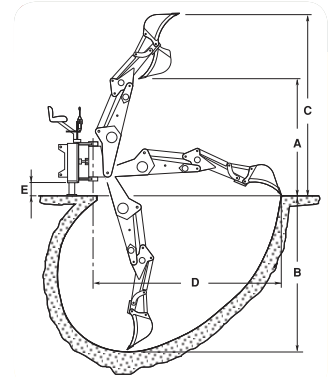

Serie 3	3.15
A (mm)	1.250
B (mm)	1.700
C (mm)	2.300
D (mm)	2.200
E (mm)	250

ARM MOWER

TRACTOR

Model	Digging depth (mm)	Rotation angle	Moving frame width (mm)	Weight (kg)	Oil tank (L)	Standard bucket (mm)	Tooth tearing resistance (kg)	Digging force with auxiliary boom (kg)
3.15	1.700	180°	1.100	285	15	250 (14 l)	1.500	700

TECHNICAL FEATURES AND STANDARD EQUIPMENT

Backhoe with moving frame with mechanical locking, applicable to the three-point hitch of the hydraulic boom.

180° central rotation by 1 cylinder (patented).

Independent hydraulic stabilisers with block valves.

Independent system with 4 cm³/rev., pump, multiplier, 15-lt built-in tank, oil strainer and hydraulic oil.

Monoblock distributor with 40 lt/1' flow rate and finger-tip control levers.

Flow rate 6 l/min.

Max working pressure: 190 bar.

Standard bucket: 250 mm.

Joints with pins and bushes of case-hardened and tempered steel.

Chrome-plated double-liner cylinder rods.

Sanding and polyester powder coating.

Accessories on request: hydraulic locking, 300-400 mm bucket, 800 mm ditch cleaning bucket.

ACCESSORIES ON REQUEST

Hydraulic locking T1

Kit adjustable tensioner Cat. 1

BUCKET	DITCH CLEANING BUCKET	TRAPEZOIDAL BUCKET
250 mm	800 mm	550 mm
300 mm		
400 mm		

