


SINGLE OVERCENTRE VALVES

TIPO / TYPE
VBCD SE

SCHEMA IDRAULICO
HYDRAULIC DIAGRAM

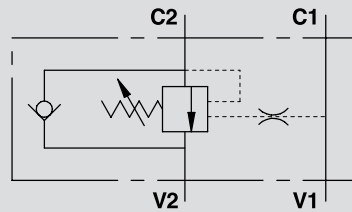

USE AND OPERATION:

These valves are used to control the actuator movements and block in one direction. In order to have the descent of a load under control and avoid the load's weight being carried away the valve will prevent any cavitation of the actuator.

MATERIALS AND FEATURES:

Body: zinc-plated steel.
Internal parts: hardened and ground steel.
Seals: BUNA N standard.
Leakage: negligible leakage.
Standard setting: 320 Bar.
Valve setting must be at least 1.3 times more than load pressure in order to enable the valve to close even when subjected to the maximum load pressure.

CONNECTIONS:



Connect V1 and V2 to the supply, C1 to the free flow side of the actuator and C2 to the actuator side you want the flow to be blocked. In-line mounting.

ON REQUEST

- non standard pressure settings
- sealing cap (CODE/P) and arrangement for sealing cap (CODE/PP)

Oil temperature: 50° C - Oil viscosity: 30 cSt


PRESSURE DROP CURVE

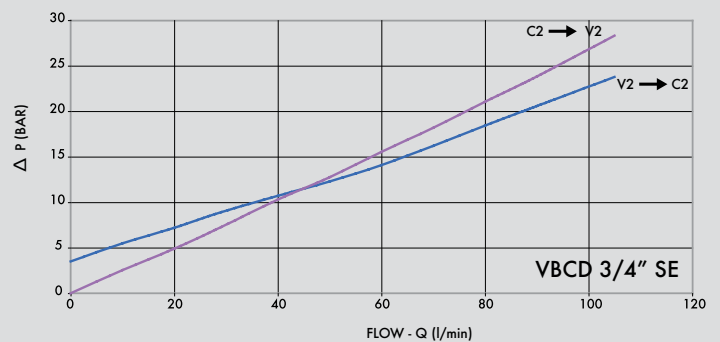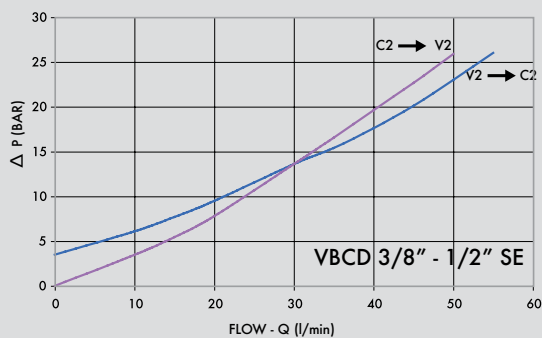



Single Counterbalance Valves

CODE	TYPE	PILOT RATIO	MAX FLOW Lt. / min	MAX PRESSURE Bar
V0390	VBCD 3/8" SE	1:3,1	35	350
V0390/RP18	VBCD 3/8" SE RP 1:8	1:8	35	350
V0410	VBCD 1/2" SE	1:3,1	50	350
V0410/RP18	VBCD 1/2" SE RP 1:8	1:8	50	350
V0411	VBCD 3/4" SE	1:5,5	105	350
V0411/RP18	VBCD 3/4" SE RP 1:8	1:8	105	350

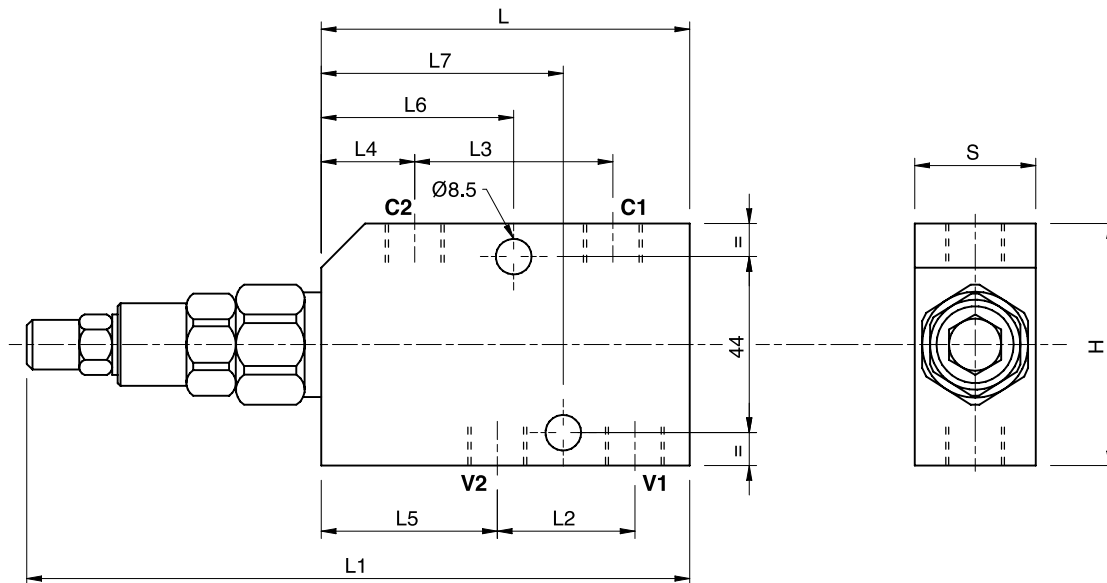

CODE	TYPE	V1 - V2 C1 - C2 GAS	L mm	L1 mm	L2 mm	L3 mm	L4 mm	L5 mm	L6 mm	L7 mm	H mm	S mm	WEIGHT kg
V0390	VBCD 3/8" SE	G 3/8"	90	162	32	48	23	42	48	58	60	30	1,194
V0390/RP18	VBCD 3/8" SE RP 1:8	G 3/8"	90	162	32	48	23	42	48	58	60	30	1,194
V0410	VBCD 1/2" SE	G 1/2"	90	162	35	48	23	40,5	48	58	60	30	1,130
V0410/RP18	VBCD 1/2" SE RP 1:8	G 1/2"	90	162	35	48	23	40,5	48	58	60	30	1,130
V0411	VBCD 3/4" SE	G 3/4"	118	190	47	71	23	47	72,5	72,5	80	35	2,150
V0411/RP18	VBCD 3/4" SE RP 1:8	G 3/4"	118	190	47	71	23	47	72,5	72,5	80	35	2,150