

WALL-MOUNTED : DELUXE **INVERTER** Single-Split Type




CS-S9TKZW | CS-S12TKZW



Wireless



Wired (Optional)



CS-S18TKZW | CS-S24TKZW | CS-S28TKZ



Wireless



Wired (Optional)

SPECIFICATIONS


MODEL		(50Hz)	CS-S9TKZW [CU-S9TKZ]	CS-S12TKZW [CU-S12TKZ]	CS-S18TKZW [CU-S18TKZ]	CS-S24TKZW [CU-S24TKZ]	CS-S28TKZ [CU-S28TKZ]	
Cooling Capacity	[min-max]	kW	2.50 [0.84-3.20]	3.23 [0.92-4.00]	5.20 [1.10-6.00]	6.00 [1.12-7.10]	6.90 [1.15-8.50]	
	[min-max]	Btu/h	8,530 [2,860-10,900]	11,000 [3,140-13,600]	17,700 [3,750-20,500]	20,500 [3,820-24,200]	23,500 [3,920-29,000]	
COP	[min-max]	W/W	3.91 [3.73-3.68]	3.65 [3.54-3.51]	3.69 [3.79-3.59]	3.57 [3.50-3.51]	3.40 [3.29-3.15]	
	[min-max]	Btu/hW	13.33 [12.71-12.53]	12.43 [12.08-11.93]	12.55 [12.93-12.28]	12.20 [11.94-11.98]	11.58 [11.20-10.74]	
Weighted COP		W/W	4.02	4.11	4.12	4.00	3.88	
		V	220-240					
Electrical Data	Voltage	V	220-240					
	Current	A	3.3-3.1	4.2-3.9	6.7-6.2	7.8-7.4	9.6-9.0	
	Power Input (min-max)	W	640 [225-870]	885 [260-1,140]	1,410 [290-1,670]	1,680 [320-2,020]	2,030 [350-2,700]	
Moisture Removal	L/h		1.5	1.8	2.9	3.3	3.9	
	[Pt/h]		3.2	3.8	6.1	7.0	8.2	
Air Circulation	Indoor	m ³ /min [ft ³ /min]	9.9 [350]	10.7 [380]	19.3 [680]	20.3 [715]	21.2 [750]	
	Outdoor	m ³ /min [ft ³ /min]	21.6 [760]-24.9 [880]	31.0 [1,095]-31.6 [1,115]	35.0 [1,235]-36.2 [1,280]	47.0 [1,660]-47.0 [1,660]	48.6 [1,715]-51.9 [1,830]	
Noise Level	Indoor [H / L / Q-Lo]	dB [A]	36/26/23	38/28/25	45/36/33	46/37/34	47/37/34	
	Outdoor [H / L]	dB [A]	[46]-[47]	[47]-[48]	[49]-[50]	[49]-[50]	[52]-[53]	
Dimensions	Height	mm	295 [511]	295 [542]	302 [619]	302 [695]	302 [795]	
		inch	11-5/8 [20-1/8]	11-5/8 [21-11/32]	11-29/32 [24-3/8]	11-29/32 [27-3/8]	11-29/32 [31-5/16]	
	Width	mm	919 [650]	919 [780]	1,120 [824]	1,120 [875]	1,120 [875]	
		inch	36-3/16 [25-19/32]	36-3/16 [30-23/32]	44-1/8 [32-15/32]	44-1/8 [34-15/32]	44-1/8 [34-15/32]	
	Depth	mm	199 [230]	199 [289]	241 [299]	241 [320]	241 [320]	
	inch	7-27/32 [9-1/16]	7-27/32 [11-13/32]	9-1/2 [11-25/32]	9-1/2 [12-5/8]	9-1/2 [12-5/8]		
Net Weight	Indoor	kg [lb]	9 [20]	9 [20]	12 [26]	12 [26]	12 [26]	
	Outdoor	kg [lb]	21 [46]	29 [64]	36 [79]	40 [88]	62 [137]	
Refrigerant Pipe Diameter	Liquid Side	inch	1/4					
	Gas Side	mm	ø 9.52	ø 12.70	ø 15.88			
		inch	3/8	1/2	5/8			
Pipe Extension	Chargeless Pipe Length	m	7.5		10			
	Maximum Pipe Length	m	15		30	20	30	
	Maximum Elevation Length	m	5		20	15	20	
	Additional Refrigerant Gas*	g/m	15		20	20	30	
Power Supply		Outdoor						

Caution For CS-S9/S12/S18/S24TKZW/S28TKZ (Important) Please do not use copper pipes that are less than 0.6mm in thickness.
*When pipes are not extended from the chargeless pipe length, the required amount of refrigerant is already in the unit.

EASY-TO-USE REMOTE CONTROLLER

Panasonic's wireless remote controller features a large Liquid Crystal Display (LCD) panel which makes it even more user-friendly. So you can sit back and enjoy easy operation and long-lasting comfort from your Panasonic Air Conditioner.

- LCD display for an easy overview of the operation status.
- ECONAVI monitors sunlight intensity, human movement, activity levels and human absence to detect and reduce energy waste.
- Activates the nanoe-G function even when the air conditioner is switched off.
- Adjusts the fan speed.
- Press up or down to set the temperature.
- Toggles between COOL and DRY setting mode.
- Delay off timer with temperature control for better sleep.
- Set the airflow.
- Stronger airflow to cool the room more quickly/ Quiet function allows you to sleep comfortably at night.
- Set the 24-hour ON & OFF Timer or 24-hour Dual ON & OFF Timer.
- Set the actual time [hour and minute].

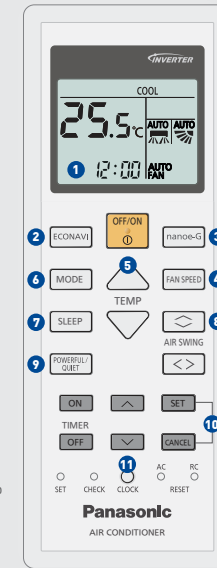

Wireless
Applicable to Deluxe Inverter


DUAL TIMER



DUAL TIMER FOR 2 ON AND OFF TIMES PER DAY

For convenience, the dual timer repeats everyday until you cancel it.

Select ON or OFF Timer




Set the time.



AEROWINGS



COOLING MODELS



OUTDOOR

