

GOODSON


Tools and Supplies for Engine Builders
 156 Galewski Drive • P.O. Box 847 • Winona, MN 55987-0847
 Toll-Free 1-800-533-8010 • Local 507-452-1830 • www.goodson.com

ACH Adjustable Coolant Hoses Instructions

Please read instructions before using

IMPORTANT: To avoid damage to the fitting threads, install the threaded section to the machine tool before adding hose segments.

Maximum working pressure of 30 PSI fluid and 50 PSI air

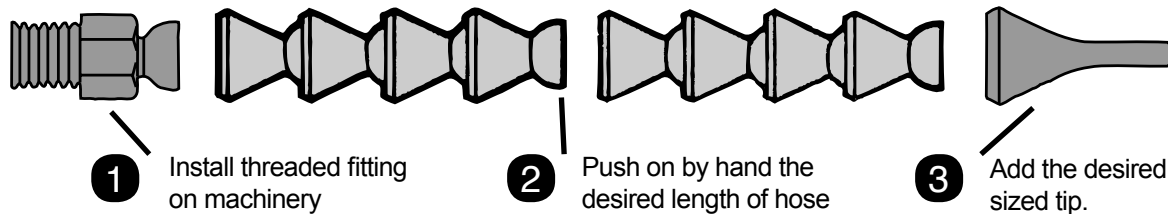

CAUTION!


Assembly and disassembly of hose segments should be done by hand. Use of tools can cause segment damage.

REPLACEMENT PARTS LIST

ORDER NO.	DESCRIPTION
ACH-401	1/4" x 11" Replacement Hose
ACH-406	1/4" NPT x 1/4" dia. Replacement Fitting
ACH-407	1" Flare Nozzle for 1/4" dia. Hose
ACH-801	1/2" x 11" Replacement Hose
ACH-804	3/8" NPT x 1/2" dia. Replacement Fitting
ACH-805	1/2" NPT x 1/2" dia. Replacement Fitting
ACH-807	1 1/4" Flare Nozzle for 1/2" dia. Hose
ACH-809	2 1/2" Flare Nozzle for 1/2" dia. Hose

1/4" Adjustable Hose Kit

1/4" adjustable coolant hose kit includes 1/4" ID, 18" length with 1/4" and 1/8" NPT fittings and 1/4", 1/8" and 1/4" round nozzles. It will fit most part washers, wet seat grinders, valve refacers, and flywheel grinders.
 Order No. **ACH-400**



1/2" Adjustable Hose Kit

1/2" adjustable coolant hose kit includes 1/2" ID, 16 1/2" length with 3/8" and 1/2" NPT fittings and 1/4", 3/8" and 1/2" round nozzles. It will fit most cylinder hones and flywheel grinders.
 Order No. **ACH-600**

