

## OPERATIONS

### Setting Saver

Setting Saver stores your personalized settings so that when the detector is turned off and then on again, you do not have to re-enter them.

### VG-2 Mode

See Option Select Mode to turn this feature on/ off. When a VG-2 signal is detected, the VG-2 alert is sounded and the display flashes “VG-2”. After 3 seconds the audio is canceled and the display no longer flashes. This cycle is repeated if the VG-2 signal is detected again.

**During the period a VG-2 signal is detected, a radar signal cannot be detected.**

However, because the VG-2 alert has confirmed that a patrol car is nearby, you are already aware of the potential for speed monitoring and can adjust your speed accordingly. Laser detection is not affected while a VG-2 signal is detected.

### Laser Signature ID (LSID)

Identify the Laser gun’s pulse rate or PPS (Pulses per Second) that is transmitted by the speed laser gun. LSID may also be used to identify other forms of laser sources such as LACC (Laser Assisted Cruise Control) systems found in some high end vehicles. If the Laser PPS information displayed is due to another source such as local airports or LACC, LSID allows you to Lock Out this rate from giving you the continuous audio alert during this and any new encounter of the same rate.

To lock out a PPS, press the Quiet button during the Laser alert. This will place an \* on the screen beside the PPS rate and Lock Out this signature ID. Any new encounter with the same Laser Signature ID will provide the display information and two quick beeps.

**Caution:** Do not lock out a PPS rate if it is close to known speed laser guns.

15

## OPERATIONS

### Segmented Selectable Laser Receiver

If these alerts are bothersome, you may wish to make note of the PPS rate for these occurrences. The laser validation windows are separated into segments allowing for customization.

#### Segment Pulse Rate

Laser Area 1: 20Hz to 950Hz  
Laser Area 2: 2600Hz to 3200Hz  
Laser Area 3: 3800Hz to 4200Hz

Laser Area 1 covers the traditional laser guns used in North America. Laser Area 2 and 3 cover laser guns recently approved for use in North America. You can change the selection from yes to no individually in option mode.

If laser within a group is not used in your area, you may shut off that group (change the selection from Y to N while in Option Select Mode) by pressing the DARK or QUIET buttons.

### POP™ Mode Alerts

Because POP™ Mode radar utilizes the same K or Ka band frequencies, POP™ Mode Alerts will initially be displayed as POP K or POP Ka then switch to band and signal strength.

### Safety Warning System™

In communities where transmitters are located, the Safety Warning System™ provides over 60 text messages. When SWS™ is detected the audio alert is geiger counter-like.

### Safety Warning System Text Message

Example: Poor - Road - Surface.

### Alert Priority

When two or more signals are received at the same time, the alert priority is:

1. Laser
2. VG-2
3. Speed Radar

**Example:** If X band is alerting, then suddenly a laser signal is detected, the laser warning will override the X band alert.

### Option Select Mode

Press the Menu button to enter Option Select Mode. Press the Menu button again will step thru in an ascending order while pressing the City button will step thru in a descending order.

16

## OPTION SELECT MODE

Press and hold the Menu button to exit. Option mode will automatically exit if no buttons are pressed within 20 seconds.

Feature	Display Shows	To Change: D=Dark, Q=Quiet	Option
CHANGE TONES	tone 3	D or Q to select	Tone 1, 2, 3 (3 Different Tone Patterns)
TEST	TEST ON	D = ON Q = OFF	ON = K, Ka Audio Tones OFF = One Beep During Power Up
LASER PULSE RATE	LSID YES	D or Q to select	LSID YES (default) LSID NO
LASER AREA 1	02-.95 Y	D = ON Q = OFF	Laser Area 1 ON (default) Laser Area 1 OFF
LASER AREA 2	2.6-3.2 Y	D = ON Q = OFF	Laser Area 2 ON (default) Laser Area 2 OFF
LASER AREA 3	3.8-4.2 Y	D = ON Q = OFF	Laser Area 3 ON (default) Laser Area 3 OFF
VG-2 MODE	VG-2 OFF	D = ON Q = OFF	VG-2 ON VG-2 OFF (default)
SWS™	SWS OFF	D = ON Q = OFF	SWS ON SWS OFF (default)
POP™	POP OFF	D = ON Q = OFF	POP ON POP OFF (default)
ALERT PERISCOPES	LED BLNK	D or Q to select	Alert Periscopes (ON, OFF or Blinking)
VOICE*	VOICE EN	D or Q to select	VOICE EN (English, Default) VOICE SP (Spanish) Voice N = OFF
BATTERY SAVER MODE	B SVR OFF	D = ON Q = OFF	Battery Saver = ON Battery Saver = OFF (Default)
FILTER MODE	FILTER	D or Q to select	Filter (default) Filter 1
TFSR	TFSR OFF	D = ON Q = OFF	TFSR ON TFSR OFF (default)
FDSR	FDSR OFF	D = ON Q = OFF BOTH D & Q	FDSR = ON FDSR = OFF (Default) FDSR = FDSR, no Audio
GPS MODE	GPS Y	D = ON Q = OFF	GPS Mode ON (Default) GPS mode OFF
LOCAL TIME	GMT-5	D or Q to select	Change Time Zone
DAYLIGHT SAVINGS	DST N	D = YES Q = NO	Daylight Savings: YES Daylight Savings: NO (Default)
CLOCK	CLOCK Y	D = YES Q = NO	Clock Display YES (Default) Clock Display NO
COMPASS MODE	COMPAS Y	D = YES Q = NO	Compass Mode ON (Default) Compass Mode OFF

17

## SPEED MONITORING

### Other Speed Detection Systems

Several techniques other than radar or laser are used to measure vehicle speeds. When these methods are being used, no detector can provide a warning. These techniques include:

- **Pacing** - A patrol car drives behind you and matches your driving speed.
- **Vascar/Aircraft** - The police measure the time it takes your vehicle to travel a known distance.

### Radar Detector Detectors: VG-2, Spectre

The Interceptor VG-2 or simply VG-2, is one type of microwave receiver used by Police to detect signals radiated by the local oscillator of a radar detector. Because its purpose is to identify persons driving with radar detectors, these devices are known as a “radar detector detector” (RDD). An RDD is the primary tool used by the police to identify radar detector equipped vehicles. If caught in a state or country where detectors are illegal, drivers risk losing their radar detector and receiving a fine. In addition, instant-on radar is almost always used in combination with an RDD, leaving unsuspecting motorists vulnerable to receive two tickets; one potential for speeding, and the other for possession of a detector.

**Note:** The newest tool Police have to detect radar detectors is called Spectre. Spectre can detect the majority of undetectable (VG-2) laser/radar detectors on the market.

It is the responsibility of the individual radar detector user to know and understand the laws in your area regarding the legality of the use of radar detectors

24

UNIT OF MEASURE	SPD MPH	D or Q to select	English / Metric / OFF
SPEED WARNING	O-SPD 0	D or Q to select	Over speed warning, select desired speed limit for alert
AUTO QUIET SPEED	AOSPD 0	D or Q to select	Select low speed limit for Auto Quiet to engage
AUTO FILTER SPEED	AFSPD 0	D or Q to select	Select low speed limit for Auto Filter to engage
ALARM RADIUS	RAD 400	D or Q to select	Select 200, 400, 600
DELETE RADIUS	D-RAD 400	D or Q to select D and Q to execute	Select delete waypoint radius
DELETE WAYPOINTS	ALL DEL	Press D and Q	Delete all manual waypoints

## OPERATIONS

### Stay Alert Feature

The Stay Alert Feature is designed to test a driver’s alertness. To engage (when the unit is not alarming):

- Press and hold the City button for approximately 2 seconds. Release the button during or immediately after the alert is given.

Display shows:

**RU ALERT**

Within 30-60 seconds, two beeps are sounded; to show alertness, the driver must press either the City, Menu, or Quiet buttons within 3-5 seconds. If a button is pressed within 3-5 seconds, the cycle is repeated.

If a button is not pressed within 3-5 seconds, an alarm sounds.

Display shows:

**GET REST**

- Press the DARK button to exit during the Stay Alert feature.

**WARNING!!!** Stay Alert is NOT intended as a substitute for adequate rest. You should NOT operate a vehicle if you are drowsy. During extended periods of vehicle operation, you should take frequent breaks. Improper reliance on the Stay Alert feature may result in vehicle damage, personal injury or death.

18

## WARRANTY INFORMATION

### Consumer Warranty

This Whistler Laser-Radar detector is warranted to the original purchaser for a period of one year from the date of original purchase against all defects in materials and workmanship. This limited warranty is void if the unit is abused, modified, installed improperly, or if the housing and/or serial numbers have been removed. There are no express warranties covering this product other than those set forth in this warranty. All express or implied warranties for this product are limited to the above time. Whistler is not liable for damages arising from the use, misuse, or operation of this product.

**Note:** Units that cannot be repaired will be replaced with the same or similar model. Replacement unit’s warranty will be based on the original unit’s purchase date.

### Service Under Warranty

During the warranty period, defective units will be repaired without charge to the purchaser when returned with a dated store receipt to the address below. Units returned without a dated store receipt will be handled as described in section “Service Out-of-warranty.”

Due to the specialized equipment necessary for testing a Laser-Radar receiver, there are no authorized service stations for Whistler brand detectors other than Whistler. When returning a unit for service, please follow these instructions:

1. Ship the unit in the original carton or in a suitable sturdy equivalent, fully insured, with return receipt requested to:

#### Whistler Repair Dept.

1412 South 1st St.  
Rogers, AR. 72756

**Please allow 3 weeks turnaround time.**

25

## OPERATIONS

### Reset Features

All user features can be reset to factory settings.

- Remove Power from the unit.
- Press and hold the Quiet button.
- Restore Power to the unit. (power switch turned on)
- Wait for 2 beeps.
- Release the Quiet button.

**Unit is now reset to the following features and settings.**

1. City/Highway to Highway Mode
2. Dim/Dark Mode - to full illumination of display
3. Auto Quiet OFF
4. Vehicle Battery Saver OFF
5. Full Power Up sequence
6. Default TONE 3
7. Laser LSID YES
8. SWS™ OFF
9. POP™ OFF
10. LED Periscopes to BLNK
11. VOICE\* EN
12. TFSR OFF
13. FDSR OFF
14. Filter
15. Laser Segments ON
16. VG-2 OFF
17. GPS YES
- **GPS RELATED FEATURES** -
18. DST NO
19. GMT -5
20. Clock YES
21. Compass YES
22. Speed MPH
23. Overspeed: CLEARED
24. Auto Quiet SPD 0
25. Auto Filter SPD 0
26. Alarm Radius: 400
27. Delete Radius: 400

19

## WARRANTY INFORMATION

2. Include with your unit the following clearly printed information:
  - Your name and street address (for shipping via USPS), a daytime telephone number and an email address, if applicable.
  - A detailed description of the problem(e.g. “Unit performs self-test but does not respond to “radar”).
  - A copy of your dated store receipt or bill of sale.

3. Be certain your unit is returned with its serial number. For reference, please write your unit’s serial number in the space provided on the next page of this guide.

**Units without serial numbers are not covered under warranty.**

**IMPORTANT:** To validate that your unit is within the warranty period, make sure you keep a copy of your dated store receipt. You may register your warranty online at [www.whistlergroup.com](http://www.whistlergroup.com), however, for warranty verification purposes, a copy of your dated store receipt must accompany any unit sent in for warranty work.

### Service Out-of-warranty

Units will be repaired at “out-of-warranty” service rates when:

- The unit’s original warranty has expired.
- A dated store receipt is not supplied.
- The unit has been returned without its serial number.
- The unit has been abused, modified, installed improperly, or had its housing removed.

The minimum out-of-warranty service fee for your Whistler detector is \$75.00 (U.S.Funds). If you require out-of-warranty service, please return your unit as outlined in the section “Service Under Warranty” along with a certified check or money order. Payment may also be made by MasterCard, VISA, or American Express; personal checks are not accepted. In the event repairs cannot be covered by the minimum service fee, you will be contacted by a Whistler technical service specialist who will outline options available to you. If you elect not to have your unit repaired, it will be returned to you along with your certified check or money order.

**Important:** When returning your unit for service, be certain to include a daytime telephone number and an email address (if applicable).

26

## RADAR/LASER ALERTS

### Radar Alerts

Speed Radar Audio/Visual Alerts when X, K or Ka is detected, the band ID and signal strength are displayed. The audio alert is continuous and has a Geiger counter-like pattern. The faster the beep, the closer or stronger the radar source.

### Laser Audio/Visual Alerts

When a laser signal is detected the word “LSR” and the corresponding laser pulse rate is displayed, the audio alert is continuous for a minimum of 3 seconds. “LSR 238”

### Pulse Protection®

Pulse (or instant-on) radar is more of a threat than conventional radar because it remains “off” until activated to measure the speed of a targeted vehicle. When a pulse type transmission is detected, your Whistler detector sounds an urgent 3-second audio warning.

Display Shows:

**PULSE**

After the 3-second pulse alert, the standard alert pattern continues for as long as the signal is present. It is important to respond promptly to a pulse alert, since warning time may be minimal.

## TROUBLESHOOTING

Your Whistler detector is expertly engineered and designed to exacting quality standards to provide you with reliable, trouble-free operation. If your unit has been correctly installed following the guidelines in this guide, but is not operating optimally, please refer to the troubleshooting guide below.

**PROBLEM:** Unit does not turn on.

- Check fuse in power cable, replace if necessary.
- Check fuse in fuse box, replace if necessary

20

## WARRANTY/SPECIFICATIONS

### Customer Service

Representatives are available to answer your questions Monday - Friday from 8:00 a.m. to 5:00 p.m. (CT - USA) at: **1-800-531-0004** via email at: [info@whistlergroup.com](mailto:info@whistlergroup.com) or visit the FAQ at [www.whistlergroup.com](http://www.whistlergroup.com).

### SPECIFICATIONS

#### Radar Frequencies:

10.500 - 10.550 GHz (X Band)  
24.050 - 24.250 GHz (K Band)  
33.400 - 36.000 GHz (Ka Superwideband)

**Laser Wavelength:** 905nm +/- 50nm

#### Operating Temperature Range:

-10 C to +70 C (+14 F to +158 F)

#### Power Requirements:

Operational 12 to 15 volts DC, 250mA nominal (2 amp fuse) Vehicle Battery Saver, 30mA nominal.

Patents can be viewed here:

[www.whistlergroup.com/pat](http://www.whistlergroup.com/pat)

POP™ Mode is a trademark of MPH Industries, Inc.  
SWS™ Mode is a trademark of Safety Warning Systems L.C.

**Specifications are subject to change without notice.**



write serial number in the space provided

27

## TROUBLESHOOTING

**PROBLEM:** Unit alarms when vehicle equipment or electrical accessories (brakes, power mirrors/windows, directionals, horn, etc.)

- Check conditions of vehicle’s electrical system, including battery and alternator.

**PROBLEM:** Audio alerts are not loud enough.

- Cancel Auto Quiet Mode or City Mode.
- Check audio level setting.
- Check Speed Selective Auto Quiet setting in Option Mode.

**PROBLEM:** Unit alarms when vehicle hits bumps.

- Check for loose lighter socket; tighten and clean.
- Check connections at both ends of the power cord. Substitute another cord to determine if the cord is defective. Return defective cord to the factory.

**PROBLEM:** Unit fails too much.

- If alarms are POP™ Ka, switch POP™ Mode to off.
- If the above option doesn’t help, use a higher Filter setting or if Ka is not used turn Ka band off.
- If alarms are due to radar based traffic flow sensors or radar based vehicle blind spot detectors, turn TF SR and/or FDSR to ON.

If difficulties occur which cannot be solved by information in this Troubleshooting Guide, please call Whistler Customer Service at 1-800-531-0004 or visit our FAQ page at [www.whistlergroup.com](http://www.whistlergroup.com), before returning your unit for service.

### Care and Maintenance

During the summer months, avoid prolonged exposure to direct sunlight by removing your unit from the dash when your vehicle is parked for an extended period of time. Do not spray water, cleaners, or polishes directly onto the unit. The spray may penetrate through the openings and damage the unit. Also, do not use any abrasive cleaners on the unit’s exterior.

21

## USER GUIDE

# Z-31R+

## HIGH PERFORMANCE LASER-RADAR DETECTOR WITH GPS

### The Whistler Group Corporate Headquarters

1716 Commerce Dr. Ste. 8 • Bentonville, AR 72712  
Tel 479.273.6012 • Fax 479.273.2927

### Whistler Customer Return Center

1412 South 1st St. • Rogers, AR 72756  
Customer Service Tel 800.531.0004

[www.whistlergroup.com](http://www.whistlergroup.com)

P/N 260056 07C16 © 2016 The Whistler Group, Inc.



**WHISTLER**

22

23

25

26



Dear Whistler Customer,

If you have questions concerning the operation of this Whistler product please call:

**Customer Service**  
1-800-531-0004

Monday - Friday • 8:00 am - 5:00 pm CT  
or visit our website

[www.whistlergroup.com](http://www.whistlergroup.com)

Please keep the receipt in a safe place. You may register your product online at [www.whistlergroup.com](http://www.whistlergroup.com). For warranty verification purposes, a copy of your dated store receipt must still accompany any unit sent in for warranty work. If the unit is returned without a dated store receipt, an out-of-warranty service charge applies. Note: Your warranty period begins at the time of purchase. The warranty is validated only by the dated store receipt! Please record the serial number of the unit in the space provided in the warranty section of the guide.

To fully acquaint yourself with the operation of your Whistler detector and to better understand the differences between detecting radar, laser, and safety radar signals, we recommend reading this entire guide or visiting our F.A.Q. page on our website [www.whistlergroup.com](http://www.whistlergroup.com)

Enjoy your Whistler detector and please drive safely.

Sincerely,  
The Whistler Group, Inc.

## OPERATION

### Power On Self-Test and Volume

Each time your Whistler detector is turned on, an automatic self-test sequence confirms that the speaker, visual displays are functional along with many of the saved settings. To increase the volume, continue turning the volume knob.

### Audio Level Adjustment

To change the audio level:

- Move Power/Volume knob back to increase audio level.
- Move Power/Volume knob forward to decrease audio level.

### Integrated Real Voice®

Real Voice™ will be used to articulate the following:

1. Band Identification
2. Safety Warning System™ categories
3. Feature Selection


### Quiet Mode

Quiet cancels audio during an alert and any new alert within 20 seconds. After 20 seconds of no alerts, the audio is restored for any new alerts.

- Press Quiet to cancel the audio.
- Press Quiet a second time during an alert to restore the standard audio alert pattern; or turn the unit off, then on.

### Auto Quiet Mode

Auto Quiet mode reduces the selected audio level approximately 5 seconds after a radar signal is detected followed by a reduced tone. The reduced tone will continue for as long as the detected signal is present and for any new signal within 20 seconds. Auto Quiet mode does not affect laser alerts. Press Quiet (before a signal is detected) to engage Auto Quiet mode.



8

Model Features Summary	3-4
Installation	5-7
• Mounting Guidelines	
• Windshield Mounting	
• Power Cord Connection	
• Fuse Replacement	
Operation	8-19
• Power On Self-Test and Volume	
• Audio Level Adjustment	
• Intergrated Real Voice®	
• Auto Quiet/Quiet Modes	
• Speed Selectable Auto Quiet	
• City/City 1/City2 Modes	
• Highway Mode	
• Understanding the Display	
• Feature Engaged Confirmation	
• Signal Strength Display	
• Alert Periscopes	
• Redlight / Speed Camera Detection	
• Getting a Satellite Lock	
• Camera Alerts	
• Manual Entry	
• Updating the Database	
• Dim/Dark Modes	
• Vehicle Battery Saver Mode	
• Teach/Tutorial Mode	
• FDSR/TFSR Rejection Modes	
• Filter Mode	
• Speed Selectable Filter	
• Setting Saver	
• VG-2 Mode	
• Laser Signature ID (LSID)	
• Selectable Laser	
• POP™ Mode Alerts	
• Safety Warning System™ SWS	
• Alert Priority	
• Option Select Mode	
• Stay Alert™	
Radar/Laser Alerts	20
• Reset Features	
• Radar Alerts	
• Laser Audio/Visual Alerts	
• Pulse Protection®	

## OPERATION

### Auto Quiet Mode (cont'd)

- Once the Auto Quiet mode is engaged, you may cancel the audio alarm by pressing Quiet.
- Press Quiet (when the unit is not alarming) to cancel Auto Quiet mode.

Note: Speed selectable Auto Quiet is selectable in Option Mode.


### Speed Selectable Auto Quiet

Traveling below the speed selected in option mode will engage Auto Quiet mode. **Note:** Enter Option Mode to set Speed Selectable Auto Quiet.

### City/City 1/City 2 Modes

Whistler's City Modes are designed to reduce the annoyance of automatic door openers, intrusion alarms and other devices which share frequencies with police radar. Generally, X band is used for these devices.

- Press City to cancel Highway Mode and engage City Mode.

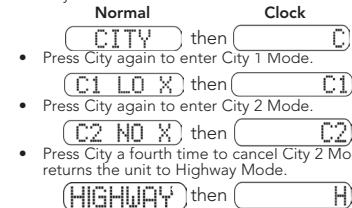


In City Mode, weak radar signals give an initial alarm of two beeps, and then remain quiet until the signal becomes very strong. When the signal strength increases, two additional beeps are provided. City 1 and City 2 Modes operate the same as Highway Mode, but in City 1 Mode, only the X band is lowered. In City 2 Mode, X-band is not detected.

**Caution:** Some towns/small cities may still be using X band radar. City Modes do not change the audio alert for laser.

9

Troubleshooting Guide	20-22
Care and Maintenance	
Are Detectors Legal?	
FCI Information	
POP™ Mode	
Speed Monitoring Technologies	22-24
• Laser Facts	
• Laser Tips	
• Radar Facts	
• Other Speed Detection Systems	
• Radar Detector Detectors	
Warranty Information	25-27
Specifications	27

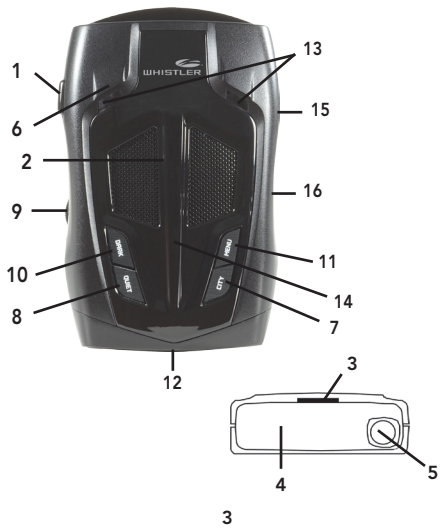

3

4

5

6

7

## OPERATION


### Highway Mode

Highway mode provides full audio warnings any time radar (X, K and Ka) or laser signals are detected, and is recommended for open road driving.

For more information on City and Highway modes, please visit our FAQ page on our website:  
[www.whistlergroup.com](http://www.whistlergroup.com)

### Understanding the Display

The unit's display can be set up to indicate Heading, Mode of Operation (Highway and City modes) and Clock.



### Feature Engaged Confirmation

Each time a button is pressed one beep confirms feature "on", two beeps confirm feature "off".

### Signal Strength Display

When a radar signal is detected the audio alerts have a geiger counter-like pattern to help you determine the strength of the radar source; the faster the beeping the stronger the radar signal. At the same time the audio is reporting, the display illuminates the band identification icon and relative signal strength from 1 to 9.



1 = weak signal, 9 = strong signal

### Alert Periscopes

Whistler's Alert Periscopes provide an added attention getting visual alert. The two extra LEDs flash on and off when the unit alarms to provide a unique visual alert. This alert can be programmed, through the Option Select Mode to be: ON, OFF or FLASHING during alerts.

10

## FEATURE DESCRIPTIONS

1. **Bracket Release Button** – provides quick and easy release of the mounting bracket.
2. **Speaker** – provides distinct audio warnings.
3. **Mounting Bracket Location** – slot holds mounting bracket firmly.
4. **Radar Antenna** – compact, high-efficiency antenna receives radar signals.
5. **Front Laser** – high gain optical lens provides increased sensitivity and field of view for leading-edge laser detection.
6. **Rear Laser** – an integrated optical waveguide provides superior detection of laser signals transmitted from behind.
7. **City Button** - reduces the annoyance of false alerts typically encountered in urban driving areas.
8. **Quiet Button** - pressing QUIET before a signal is detected engages Auto Quiet Mode which automatically reduces the audio level after the initial warning to a low audio level setting. Pressing QUIET during a radar/laser encounter silences audio alerts, while allowing visual alerts to keep you informed.
9. **Power / Volume Control** – turns the unit on/off and adjusts the audio level.
10. **Dim / Dark** - engages Dim/Dark modes.
11. **Menu Button** - enters Option Select Mode.
12. **OLED Text Display** – provides better contrast, brightness and color/shows alerts detected, signal strength, and indicates engaged modes of operation.
13. **Alert Periscopes** - provide an additional attention getting visual alert.
14. **GPS Antenna** - provides Traffic Camera alerts as well as other speed selective settings.
15. **Power Jack** – provides connection for the power cord.
16. **USB Jack** - provides connection to a PC for data updates.

## INSTALLATION

### Mounting Guidelines

- Mount the unit as low as possible near the center of the windshield.
- Do not mount your unit behind wipers, ornaments, mirrored sunscreens, etc. These obstructions have metal surfaces which can affect radar and laser signals and reduce critical warning time. (Regular tinted glass does not affect reception.)
- Some windshields have an Instaclear™ or Electriclear™ type coating, which affects radar signals. Consult your dealer or the vehicle's owner's guide to determine if your windshield has this coating.
- Avoid placing unit in direct contact with windshield.
- To reduce the possibility of theft, conceal your unit when not in use. We recommend that you do not leave the suction cup bracket on the windshield in direct sunlight. If the detector is removed, this may cause blistering of the dash in some vehicles.




**Important:** Make sure unit is level.

5

## INSTALLATION

### Windshield Mounting

- Install the two suction cups and rubber bumper onto the bracket by fitting them into their holes.
- Press the suction cups onto the windshield at the location you have chosen.



**Important:** Some newer cars have a plastic safety coating on the inside of the windshield. The windshield bracket may leave permanent marks on this type of surface. To find out if your vehicle has this type of windshield, check the vehicle's user guide or ask your dealer.


- Slide the detector onto the bracket until it locks into place.

- If necessary, the unit may be leveled by bending the windshield bracket. Press the bracket release button and remove the detector before bending.

6

## OPERATION

### Dim/Dark Modes (cont'd)



- Briefly press and release the Dark button a third time to restore full illumination to the display.

### Vehicle Battery Saver Mode

If selected the Vehicle Battery Saver Mode automatically shuts off the detector after 3 hours if the unit has constant power.

The timer is reset:

1. Each time the detector is turned off.
2. The power cord is disconnected or power is removed to the unit.
3. Any button is pressed before the timer has expired. The detector will alert you with an audible and visual warning before it shuts off.

During this warning you can reset the timer by pressing any button. If the unit has automatically turned itself off, press any button to turn the unit back on.

Refer to "Option Select Mode" for instructions for changing the battery saver mode option.

### Teach/Tutorial Mode

- Provides simulated alerts for each type of signal.
- Press City and Quiet simultaneously and release.



- Press Dark to cancel.

13

## INSTALLATION

### Power Cord Connection

- Plug the small end of the power cord into the unit's power jack.
- Plug the large end into the vehicle's cigarette lighter socket.


**Note:** Cord fits tightly into detector. When installing the cord, expect some resistance.

The USB can charge an ipad, iphone, smartphone, MP3 or tablet. The output for the USB port is 1A.



### Fuse Replacement

The lighter socket plug is equipped with a replaceable 3 amp, 3AG fuse located behind the silver tip. To replace the fuse, carefully unscrew the tip of the plug.



**Important:** Unscrew slowly. The tip contains a spring which may fly out when disassembling. Insert the new fuse with the spring and screw on the tip. With use, screw cap on plug may loosen. **Retighten occasionally.**

## OPERATION

### Field Disturbance Sensor Rejection (FDSR)

**Traffic Flow Sensor Rejection (TFSR)**  
Recently many new products that operate on police radar frequencies have been causing nuisance alerts to radar detectors. These radar based sensors are installed alongside the Highway and more recently on vehicles used as lane change assist / blind spot detectors / collision avoidance systems. **TFSR** when turned ON is designed to eliminate alerts from specific Traffic Flow sensors. **FDSR** when turned ON is designed to identify all radar based collision avoidance systems that operate within the same band as police radar and provide a brief less intrusive alert to keep you informed and aware. A signal strength indicator will help determine your proximity to the source without the continued annoyance of audio.

We suggest you turn **FDSR ON** if you are experiencing excessive random false alerts when behind select vehicles.

### Filter Modes

There are times when a radar detector in another vehicle, can emit a frequency which can cause your detector to falsely alert. The Filter Modes allow you to select the level needed for your area to minimize the occurrences of these false alerts. Filter Mode is the factory default setting and should provide adequate filtering for most conditions. If you experience excessive alerts due to radar detectors in other vehicles, increase the Filter level. See Option Select Mode chart to change the filter settings.

### Speed Selectable Filter Mode

Traveling below the speed selected in option mode will apply the maximum Filter. **Note:** Enter Option Mode to set Speed Selectable Filter.

14