



Instructions for attaching the fixings to the Tile Backer Board

Tile Backer Boards

The Tile Backer Board is produced using a high density rigid polystyrene core, glass fibre mesh and a cement coating.



It is waterproof and can be used internally and externally.


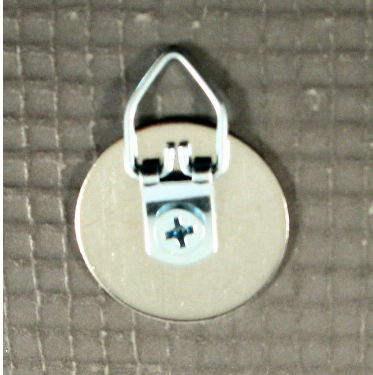
Because the boards have been cut into smaller sizes, please make sure to seal the edges of the board, if it is being used outdoors.

It can be easily cut into shapes by using a Stanley knife.

It is lightweight, making it the ideal substrate for mosaic artists.

Please see below the steps on how to attach the hangers to the board. Make sure to attach the fixings before you start placing tiles.

Step	Instruction	Illustration	Expected Result
1	Collect D-ring, Washer, Bolt, Tee Nut and a screwdriver.		All tools available
2	Push a screwdriver through the board.		Creating a nice hole

3	Press the Tee Nut into the board from the front.		Ensure Tee Nut is flush to the board to place mosaic tiles on top of it
4	Place D-ring and Washer onto the bolt and screw bolt into Tee Nut from the back of the board until tight.		Washer will be fixed directly against the board