

Hand-Held Lubrication

Heavy-Duty & Air-Operated Grease Guns



Lincoln heavy-duty grease guns incorporate the same unique features as Model 1142 on page 90.

Dual Pressure


Model 1013 and 1145

- High or low pressure for light- or heavy-duty greasing action
- Full pressure on short strokes for heavy greasing in tight places; develops full pressure with just 1/4" stroke
- Extension swivels 360° for hard-to-reach fittings.
- Plated barrel, head and handle
- Handy three-way loading: cartridge, filler pump or bulk
- Grease resistant rubber handle grip for positive pumping action

Precision High-Pressure and Volume

Model 1035 & 1037

- Exclusive toggle mechanism design uses compound leverage for high-pressure pumping with little effort
- Rust resistant plated gun barrel and handle, black enamel head.
- Equipped with filler nipple for fast refill from Lincoln filler pump
- 21 oz. bulk capacity for heavy-duty greasing applications

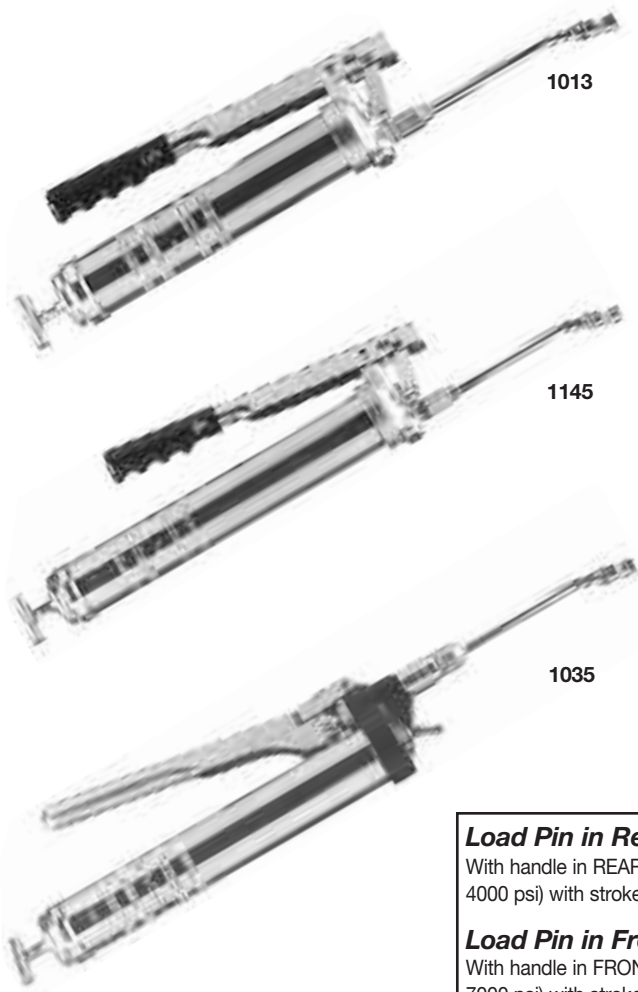


Load Pin in Rear Position for High-Output Delivery

With handle in REAR (lo) shift position, grease is delivered at low pressure (maximum 4000 psi) with strokes from 1/4" to 12". Output 1 ounce per 18 full strokes.

Load Pin in Front Position for High-Pressure Delivery

With handle in FRONT (hi) shift position, grease is delivered at high pressure (maximum 7000 psi) with strokes from 1/4" to 9". Output 1 ounce per 33 full strokes.



Dual-Pressure

| Model | Lube Capacity | Extension | Length | Max. Pressure |
|-------|------------------------------|-----------------------------|---------|---------------|
| 1013 | 16oz. Bulk/14.5oz. Cartridge | 6" & hydraulic coupler | 22 7/8" | 7000/4000 psi |
| 1145 | 21oz. Bulk/14.5oz. Cartridge | 5853 6" & hydraulic coupler | 25 1/4" | 7000/4000 psi |

Specifications: Output at **low pressure** 1 oz. per 18 strokes; at **high pressure** 1 oz. per 33 strokes using No. 1 cup grease at 70°F. Barrel diameter 2 1/4".

High-Pressure

| Model | Lube Capacity | Extension | Length | Max. Pressure |
|-------|------------------------------|------------------------------|---------|---------------|
| 1035 | 21oz. bulk/14.5oz. cartridge | 5834 6" & heavy-duty coupler | 27 1/4" | 7000 psi |

Specifications: Lubricant output 1 oz. per 25 strokes using No. 1 cup grease at 70°F. Barrel diameter 2 1/4".

Volume

| Model | Lube Capacity | Extension | Length | Max. Pressure |
|-------|------------------------------|-----------------------------|---------|---------------|
| 1037 | 21oz. bulk/14.5oz. cartridge | 5834 6" & hydraulic coupler | 27 1/4" | 3000 psi |

Specifications: Lubricant output 1 oz. per 9 strokes using No. 1 cup grease at 70°F. Barrel diameter 2 1/4".