


# Lubrication equipment, hand-held lubrication tools and accessories

Product catalog



# PowerLuber accessories

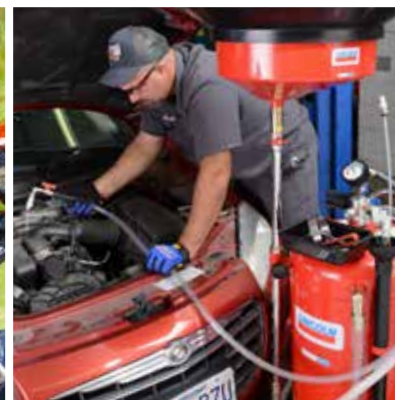

## Batteries

**Model 1872**

20 V, 4.0Ah Li-ion rechargeable slide-on battery for all 20 V Li-ion PowerLubers.

**Model 1871**

20 V, 2.5Ah Li-ion rechargeable slide-on battery for all 20 V Li-ion PowerLubers.

**Model 1861**

18 V Li-ion rechargeable slide-on battery for 1860 series PowerLubers.

**Model 1801**

18 V NiCad rechargeable battery for 1840 series PowerLubers.

**Model 1401**

14.4 V NiCad rechargeable battery for 1440 series PowerLubers.

**Model 1261**

12 V Li Ion slide-on battery.

**Model 1201**

12 V NiCad rechargeable battery for 1240 series PowerLubers.

**Note:** NiCad and Li Ion batteries are not interchangeable.

## Chargers

**Model 1870**

One hour high-output 110 V AC charger. For use with 12 and 20 V Li-ion PowerLuber batteries.

**Model 1875A**

One hour charger for use in vehicles and heavy equipment using 12 or 24 V DC outlets. For use with 12 and 20 V Li-ion PowerLuber batteries.

**Model 1850**

110 V one hour high-output Li-ion charger maximizes the life cycle of the battery. For use with 18 V Li Ion battery model 1861.

**Model 1855A**

One hour fast charger for use in vehicles and heavy equipment using 12 or 24 V DC outlets. For use with 18 V Li Ion battery model 1861.

**Model 1410**

110 V “smart” charger recharges batteries in less than one hour and recognizes battery condition when not in use. For use with both Lincoln model 1401 (14.4 V NiCad) and model 1801 (18 V NiCad) battery packs.

**Model 1815A**

One hour charger for use in vehicles and heavy equipment using 12 or 24 V DC outlets. For use with both Lincoln model 1401 (14.4 V NiCad) and model 1801 (18 V NiCad) battery packs.

**Model 1210**

110 V one-hour fast charger for use with battery pack model 1201. 6 ft. (1,8 m) cord; UL/ULC listed.

**Model 1215**

One hour charger for use in vehicles and heavy equipment using 12 V DC outlets. For use with 12 V NiCad battery model 1201.

**Model 1215A**

One hour fast charger for use in vehicles and heavy equipment using 12 or 24 V DC outlets. For use with 12 V NiCad battery model 1201.

**Model 1414**

Shoulder strap for hands-free movement from job to job (14.4 and 18 V PowerLubers only).

**PowerLock coupler**

**Model 5900**

Lever-action coupler for quick attachment and release. Reverse jaw design holds the fitting securely to the seat for single-handed operation. Durable, all-steel construction with flexible rubber sleeve.



PowerLuber accessories – whip hoses						
Model	Description		Thread size		Maximum pressure Working	
	in.	cm	Inlet UNEF	Outlet NPT (m)	psi	bar
1218	18	46	7/16	1/8	7 500	517
1224	24	61	7/16	1/8	7 500	517
1230	30	76	7/16	1/8	7 500	517
1236	36	91	7/16	1/8	10 000	689
1248HP	48	122	7/16	1/8	10 000	689